



## Contents [ [hide](#) ]

- [1 anslut 019929 Strip Light LED](#)
- [2 SAFETY INSTRUCTIONS](#)
- [3 TECHNICAL DATA](#)
- [4 INSTALLATION](#)
- [5 LED strip light](#)
- [6 PRODUCT INFORMATION SHEET](#)
- [7 Flowing Chart](#)
- [8 Documents / Resources](#)
  - [8.1 References](#)

***anslut***<sup>TM</sup>

## anslut 019929 Strip Light LED



## OPERATING INSTRUCTIONS

**Important!** Read the user instructions carefully before use. Save them for future reference. (Translation of the original instructions)




## SAFETY INSTRUCTIONS

- Read these instructions carefully before installation and use, and save them for future reference.
- The product is not dimmable.
- Disconnect the power supply before installation.
- The product is only intended for indoor use in dry areas. Damp areas and outdoor environments require products with a higher protection rating.
- Never modify the product or any of its parts in any way – risk of personal injury or material damage.
- The product is intended for lights with 2- pin IEC approved G13 standard sockets.
- The product should be installed by an authorised electrician in accordance with the relevant electrical safety regulations.

## ELECTRICAL SAFETY!

New installations and extensions to existing systems should always be carried out by an authorised electrician. If you have the necessary experience and knowledge (otherwise contact an electrician), you can replace power switches and wall sockets, fit plugs, extension cords and light sockets. Incorrect installation can result in fatal injury and the risk of fire

## SYMBOLS

-  Read the instructions.
-  The product is not dimmable.
-  Approved in accordance with the relevant directives.



-  Recycle discarded product in accordance with local regulations.

## TECHNICAL DATA

- **Rated voltage** 230 V ~ 50 Hz
- **Output** 22 W
- **Socket** G13
- **Tube type** T8
- **Energy class** E
- **Colour temperature** 3000 K
- **Luminous flux** 2450 lm
- **Power factor** 0.9
- **Colour rendering index** 80
- **Life span** 30000 h
- **On/Off** 12500 times

## INSTALLATION

### NEW INSTALLATION

FIG. 1


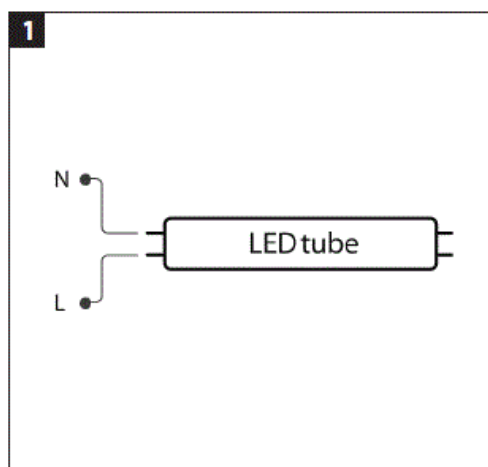


FIG. 2

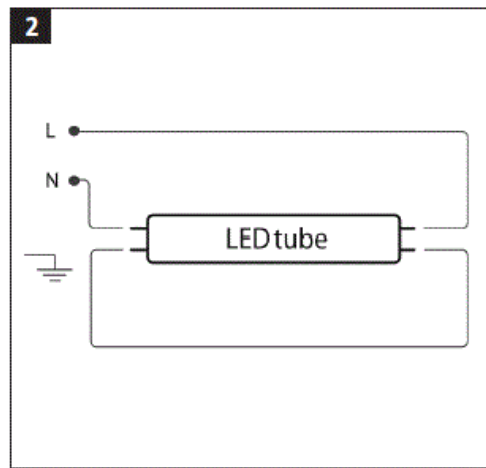


## AFTER INSTALLATION IN LIGHTS WITH CHOKE COIL

### Conventional T8 strip light

S = Starter.


FIG. 3

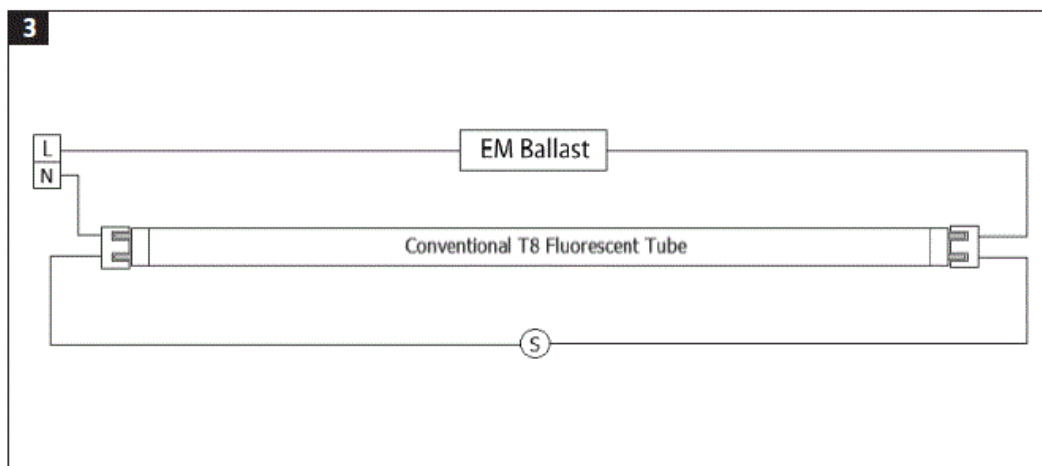

### LED strip light

- Replace the starter with the LED fuse.
- F = LED fuse.

FIG. 4

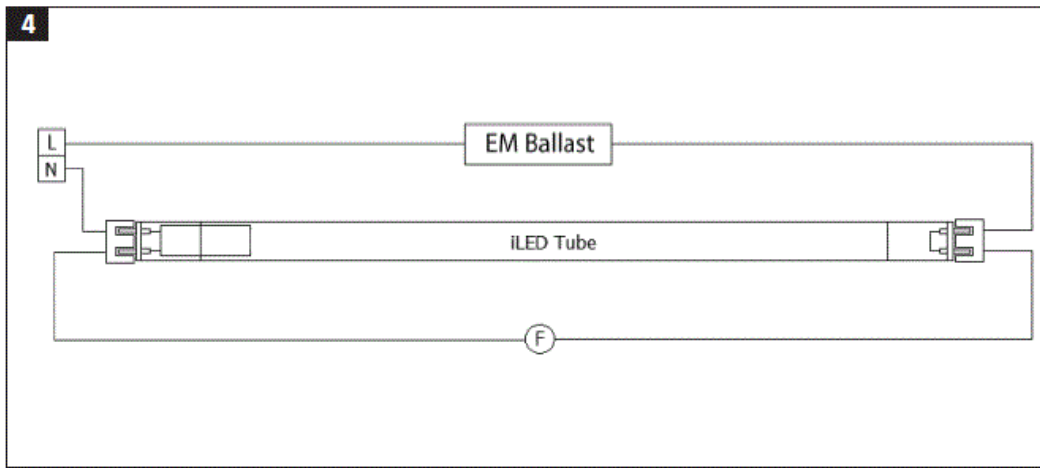


## AFTER INSTALLATION IN LIGHTS WITH ELECTRONIC ACTUATOR

### Conventional T8 strip light

A = Electronic actuator.

FIG. 5

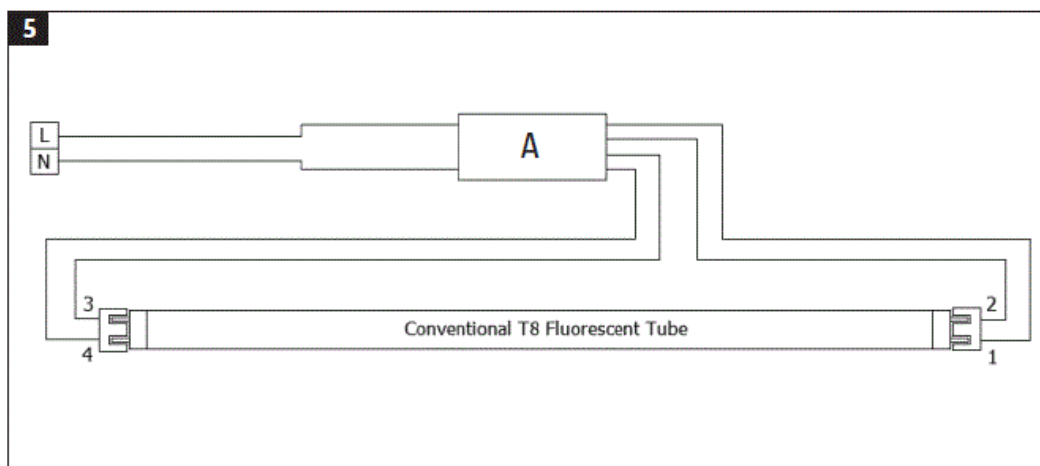


### LED strip light

1. Remove the electronic actuator (B) as shown in the figure below.
2. Connect a direct wire between pin 2 and 3 on the light.
3. Connect pin 1 to the mains phase (L) and pin 4 to neutral (N).

B = Electronic actuator.

FIG. 6

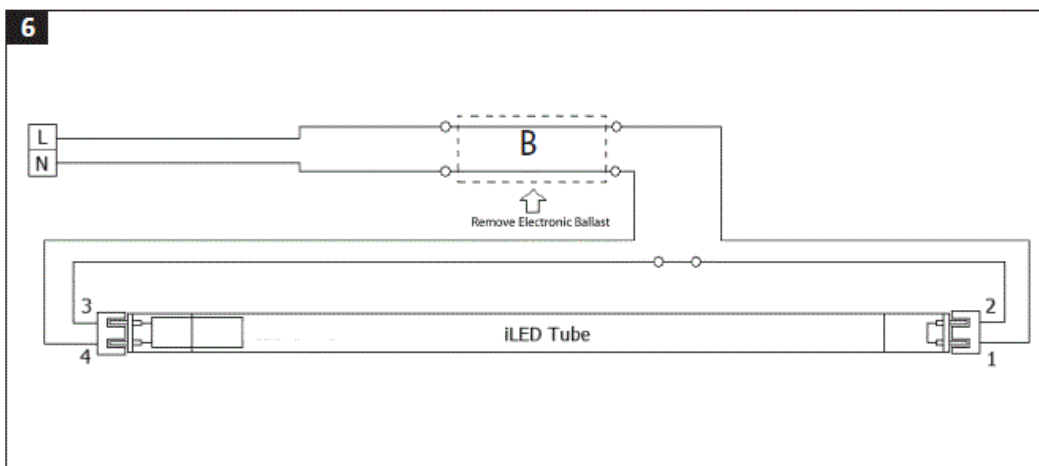

## PRODUCT INFORMATION SHEET

Supplier's name or trade mark:	Anslut		
Supplier's address <sup>(a)</sup> :	Jula AB, Julagatan, 2, 53237 Skara, SE		
Model identifier:	019929		
Type of light source:			
Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source connected to mains supply or light source not connected to mains supply:	MLS	Connected light source (CLS):	no
Colour-tunable light source:	no	Envelope:	—
High luminance light source:	no		
Anti-glare shield:	no	Dimmable:	no
<b>Product parameters</b>			


Parameter		Value	Parameter	Value
<b>General product parameters:</b>				
Energy consumption in on-mode (kWh/1000 h)		22	Energy efficiency class	E
Useful luminous flux ( $\Phi_{\text{use}}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°).		2 450 inSphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set.	3 000
On-mode power ( $P_{\text{on}}$ ), expressed in W.		22,0	Standby power ( $P_{\text{sb}}$ ), expressed in W and rounded to the second decimal.	0,00
Networked standby power ( $P_{\text{net}}$ ) for CLS, expressed in W and rounded to the second decimal.		—	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set.	80
Outer dimensions without separate control gear, lighting control parts and non-lighting control parts, if any (millimetre).	Height	28	Spectral power distribution in the range 250 nm to 800 nm, at full-load.	See image in last page
	Width	28		
	Depth	1 500		

Claim of equivalent power (°)	—	If yes, equivalent power (W)	—
		Chromaticity coordinates (x and y)	0,4400,400
<b>Parameters for directional light sources:</b>			
Peak luminous intensity (cd)		Beam angle in degrees, or the range of beam angles that can be set	
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	2	Survival factor	0,90
The lumen maintenance factor	0,96		
<b>Parameters for LED and OLED mains light sources:</b>			
Displacement factor (cos $\phi_1$ )	0,89	Colour consistency in MacAdam ellipses	3
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	—
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0

- "—": not applicable;
- "—": not applicable;




# Flowing Chart

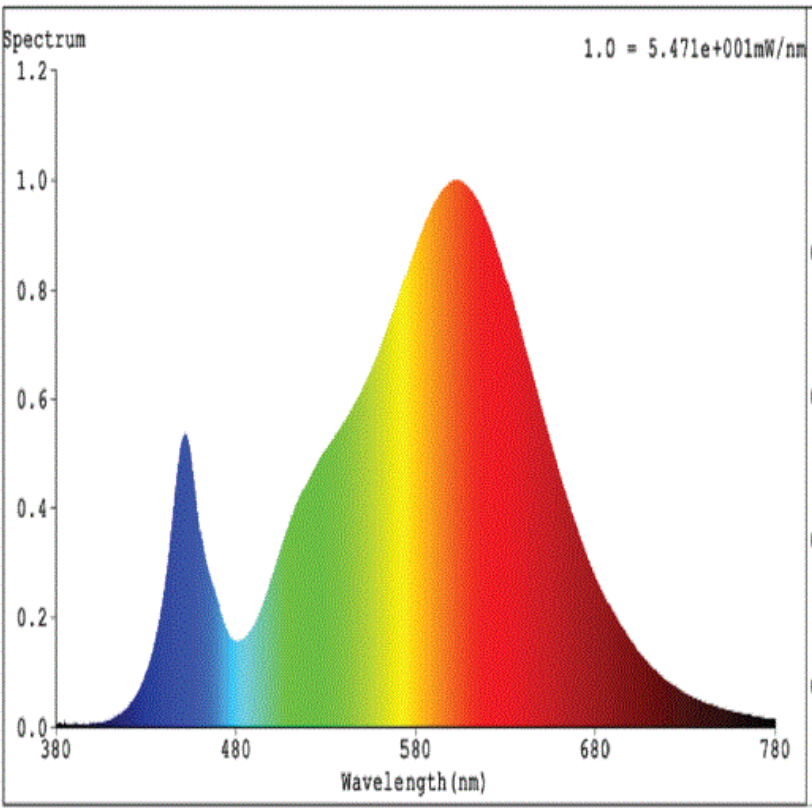

- [www.jula.com](http://www.jula.com)
- JULA AB, BOX 363, SE-532 24 SKARA
- 2025-06-17
- © Jula AB

## Documents / Resources

	<a href="#">anslut 019929 Strip Light LED [pdf]</a> Instruction Manual 019929 Strip Light LED, 019929, Strip Light LED, Light LED, LED
---	---

## References

- [User Manual](#)

# Leave a comment

Your email address will not be published. Required fields are marked \*

Comment \*

Name

Email

Website

☐ Save my name, email, and website in this browser for the next time I comment.

**Post Comment**

**Search:**

e.g. whirlpool wrf535swhz

**Search**

[Manuals+](#) | [Upload](#) | [Deep Search](#) | [Privacy Policy](#) | [@manuals.plus](#) | [YouTube](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.