



# anslut 019936 Counter Lighting LED Instruction Manual

[Home](#) » [anslut](#) » anslut 019936 Counter Lighting LED Instruction Manual 

## Contents

- [1 anslut 019936 Counter Lighting LED](#)
- [2 SAFETY INSTRUCTIONS](#)
- [3 Symbols](#)
- [4 TECHNICAL DATA](#)
- [5 INSTALLATION](#)
- [6 PRODUCT INFORMATION SHEET](#)
- [7 Documents / Resources](#)
- [8 Related Posts](#)



## anslut 019936 Counter Lighting LED



## SAFETY INSTRUCTIONS

- Only intended for indoor use.
- Do not connect the light to the mains while it is still in the pack.
- Check that all electrical and connecting cables comply with the applicable regulations and that they are connected in accordance with the instructions.
- Never overload the mains. This can result in fire or a risk of electric shock.

- Keep out of the reach of children.
- Do not store the light in a damp or very cold/hot place, this can damage the electronics.
- The electronics in the light are sensitive to knocks and blows. Avoid dropping it.
- Never attempt to replace damaged power cords yourself.
- The light source should only be replaced by an authorised service centre or other qualified personnel.
- The product is not dimmable.
- Make sure that no concealed cables can be damaged during the installation.
- The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced.
- Max.number of interconnected: 9pcs
- The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced.

### **WARNING!**

New installations and extensions to existing systems should always be carried out by an authorised electrician. If you have the necessary experience and knowledge (otherwise contact an electrician), you can replace power switches and wall sockets, fit plugs, extension cords and light sockets. Incorrect installation can result in fatal injury and the risk of fire.

### **Symbols**


- Approved as per applicable directives.
- Only intended for indoor use.
- Safety class II.
- Recycle discarded product in accordance with local regulations.

### **TECHNICAL DATA**

- Rated voltage 230 V ~ 50 Hz
- Output 11 W
- Luminous flux 1250 lm
- Colour temperature 3000 K
- Life span 35000 h
- Off/On 20 000 times
- Energy class E
- Dimmable No
- Protection rating IP20
- Diffusion angle 130°
- Luminous flux retention factor 0.9

### **INSTALLATION**

See figures for installation instructions:

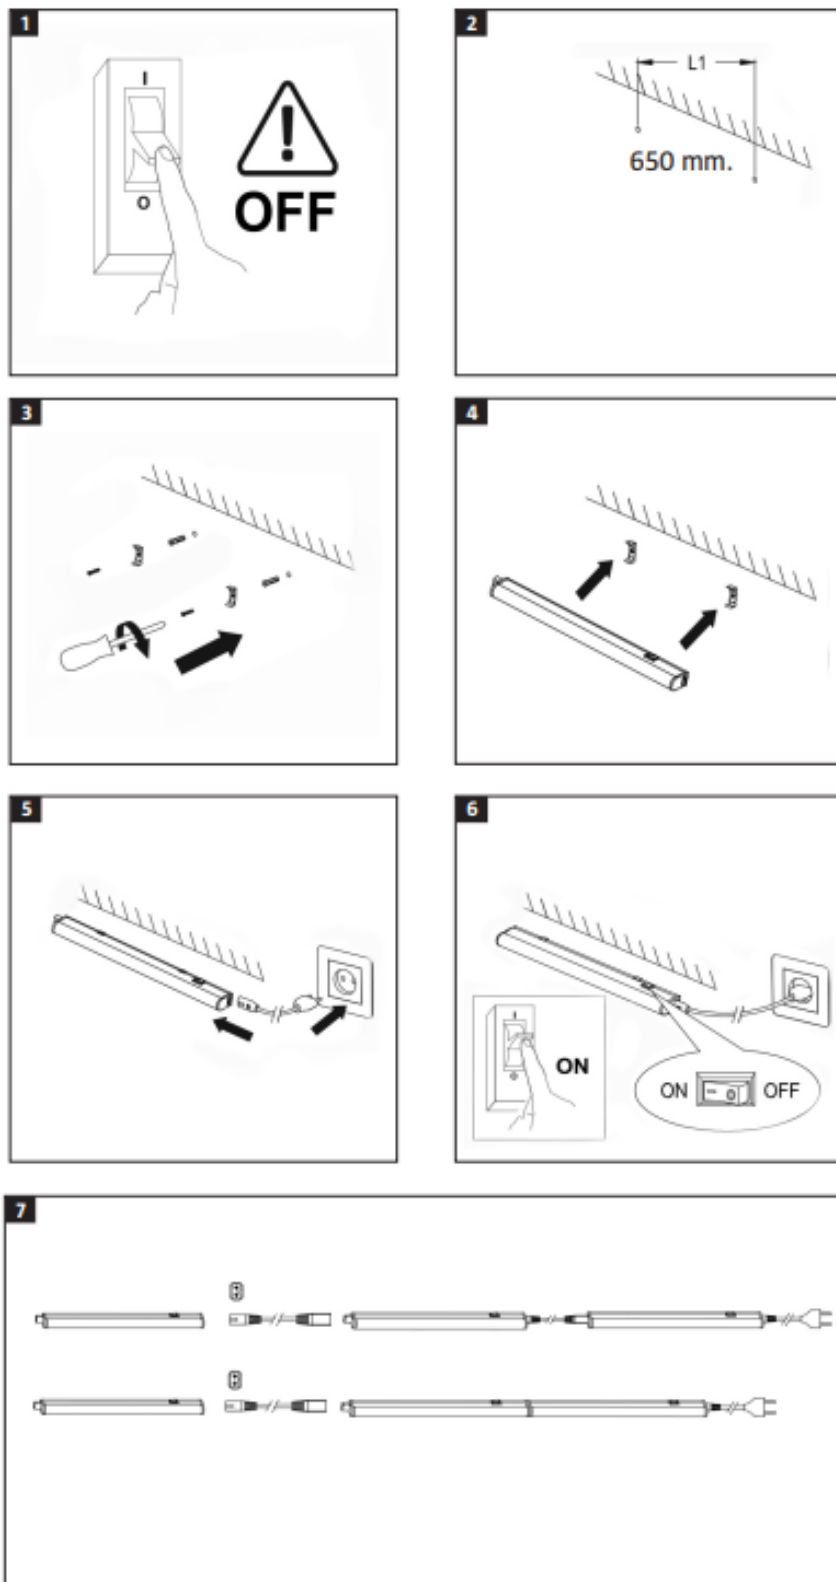

## PRODUCT INFORMATION SHEET

|                               |  |                                 |      |
|-------------------------------|--|---------------------------------|------|
| Supplier's name or trademark: | Anslut                                 |                                 |      |
| Supplier's address (a):       | Jula AB, Julagatan, 2, 53237 Skara, SE |                                 |      |
| Model identifier:             | 019936                                 |                                 |      |
| Type of light source:         |  |                                 |      |
| Lighting technology used:     | LED                                    | Non-directional or directional: | NDLS |


|  |        |                        |   |                        |
|--|--------|------------------------|---|------------------------|
| Light source connected to mains supply or light source not connected to mains supply:  |        | MLS                    | Connected light source (CLS):   | no                     |
| Colour-tuneable light source:  |        | no                     | Envelope:   | –                      |
| High luminance light source:   |        | no                     |   |                        |
| Anti-glare shield:   |        | no                     | Dimmable:   | no                     |
| <b>Product parameters</b>  |        |                        |   |                        |
| Parameter  |        | Value                  | Parameter   | Value                  |
| <b>General product parameters:</b>   |        |                        |   |                        |
| Energy consumption in on-mode (kWh/1000 h)   |        | 11                     | Energy efficiency class   | E                      |
| Useful luminous flux ( $\Phi_{\text{use}}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°). |        | 1 250 in Sphere (360°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set. | 3 000                  |
| On-mode power ( $P_{\text{on}}$ ), expressed in W.   |        | 11,0                   | Standby power ( $P_{\text{sb}}$ ), expressed in W and rounded to the second decimal.  | 0,00                   |
| Networked standby power ( $P_{\text{net}}$ ) for CLS, expressed in W and rounded to the second decimal.  |        | –                      | Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set.   | 80                     |
| Outer dimensions without separate control gear, lighting control parts and non-lighting control parts, if any (millimetre).                            | Height | 912                    | Spectral power distribution in the range 250 nm to 800 nm, at full-load.  | See image in last page |
|  | Width  | 24                     |   |                        |
|  | Depth  | 34                     |   |                        |
| Claim of equivalent power (c)  |        | –                      | If yes, equivalent power (W)  | –                      |
|  |        |                        | Chromaticity coordinates (x and y)  | 0,434<br>0,403         |
| <b>Parameters for directional light sources:</b>   |        |                        |   |                        |
| Peak luminous intensity (cd)   |        |                        | Beam angle in degrees, or the range of beam angles that can be set  |                        |
| <b>Parameters for LED and OLED light sources:</b>  |        |                        |   |                        |
| R9 colour rendering index value  |        | 0                      | Survival factor   | 0,90                   |
| The lumen maintenance factor   |        | 0,96                   |   |                        |

| Parameters for LED and OLED mains light sources:  |      |                                      |     |
|---|------|--------------------------------------|-----|
| Displacement factor (cos $\phi$ 1)  | 0,70 | Colour consistency in mcdam ellipses | 6   |
| Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage. | -(b) | If yes then replacement claim (W)    | —   |
| Flicker metric (Pst LM)   | 1,0  | Stroboscopic effect metric (SVM)     | 0,4 |

(a)”: not applicable;

(b)”: not applicable;

## Documents / Resources

|  |   |
|--|---|
|  | <p><a href="#">anslut 019936 Counter Lighting LED</a> [pdf] Instruction Manual<br/>019936, Counter Lighting LED, 019936 Counter Lighting LED, Lighting LED, LED</p> |
|--|---|

Manuals+.