



anslut 023956 Rechargeable Work Light LED Instruction Manual

[Home](#) » [anslut](#) » anslut 023956 Rechargeable Work Light LED Instruction Manual 

anslut 023956 Rechargeable Work Light LED Instruction Manual



Contents

1 SAFETY INSTRUCTIONS

2 SYMBOLS

3 DESCRIPTION

4 USE

4.1 HOW TO USE

5 CHARGING THE BATTERY

6 TECHNICAL DATA

7 Documents / Resources

8 Related Posts

SAFETY INSTRUCTIONS

- Do not look directly into the light when it is switched on.
- Never point the beam at the eyes of people or animals.
- Store out of the reach of children.
- Can be used indoors and outdoors, but do not immerse in water or any other liquid.
- Do not charge the product outdoors – this will not comply with protection rating IP65.
- Do not use the charger to charge other products.
- Only use the supplied charger to charge the lamp.
- The switch must be in the off position during charging, otherwise this can damage the light.
- Never cover the lens or reflector when in use.
- Do not attempt to replace the battery.
- The product must be discarded if the glass front is cracked.
- The LED light source is not replaceable. When the light source has reached the end of its useful life the complete product must be replaced.

SYMBOLS



Read the instructions before use.




Approved in accordance with the relevant directives.



Recycle discarded product in accordance with local regulations.

DESCRIPTION

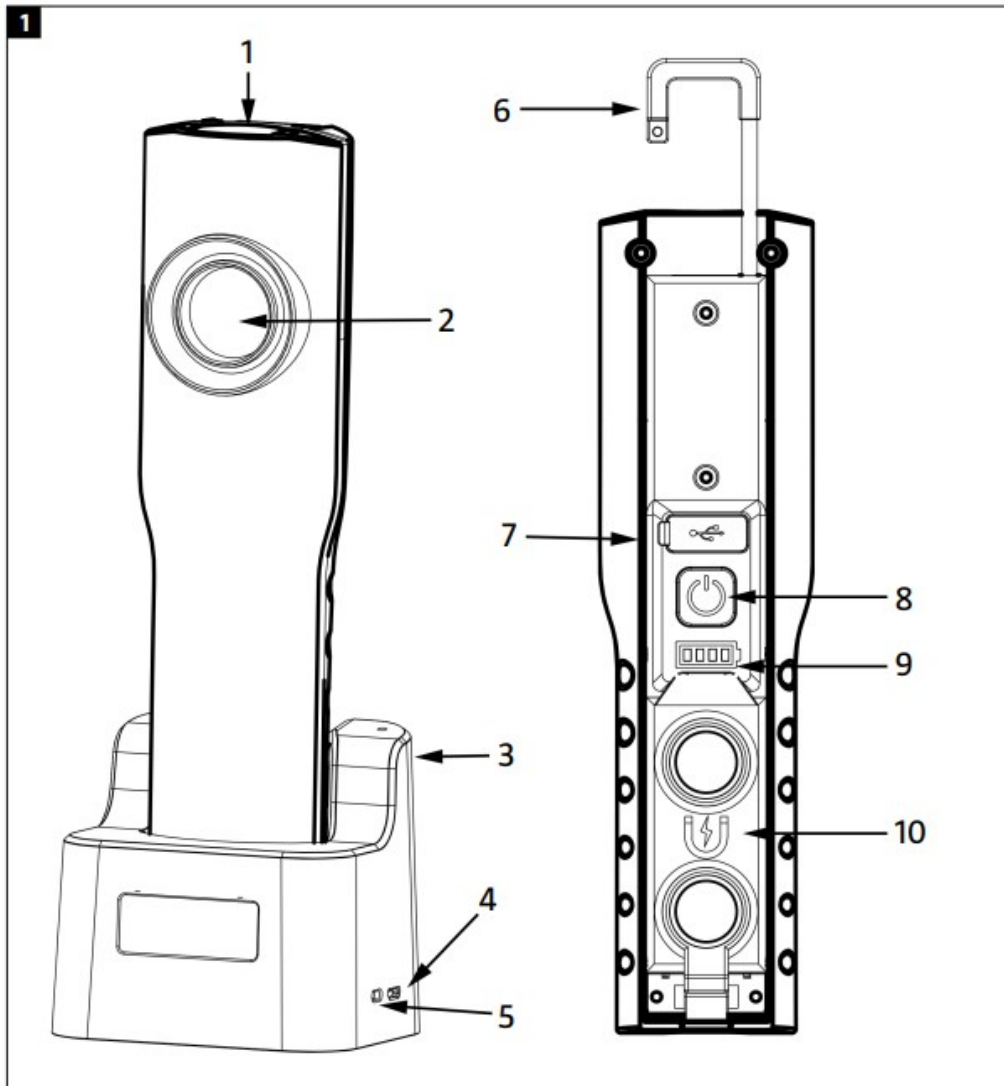

1. Car spotlight
2. Main spotlight
3. Charger stand
4. USB-C port
5. Battery indicator
6. Hook (rotational 360°)
7. USB-C port
8. Switch
9. Battery indicator
10. Magnetic mount (swivels 90°)

USE

HOW TO USE

Press the switch to switch on and off.
The following functions by pressing the switch:

Number of times	Function
1	Main spotlight 100%
2	Main spotlight 50%
3	Main spotlight 10%
4	Car spotlight
5	OFF

NOTE:

- If the switch is not touched for 3 seconds the next time it is pressed will switch it off.
- Emergency function: when the emergency function is used the main spotlight will shine at 10% power.

CHARGING THE BATTERY

- The battery must be charged before using for the first time.
- Connect USB charger to the power supply.
- Connect the charger cord to the micro USB-C port.
- The battery charge status is shown on the battery indicator. When all four battery charging lights go on the battery is fully charged.
- The battery should be charged every three months to maintain its capacity

TECHNICAL DATA

- **Battery:** 3.7 V/5000 mAh
Output: 10/3 W
Protection rating: IP54
- **Luminous flux:** 1300/220 lm
- **Colour temperature:** 6500 K
- **Charging time:** Approx. 4 h
- **Run time:** Max 3/10 h
- **Operating temperature:** -10–40°C

Jula AB reserves the right to make changes to the product. Jula AB claims copyright on this documentation. It is not allowed to modify or alter this documentation in any way and the manual shall be printed and used as it is in relation to the product. For the latest version of operating instructions, refer to the Jula website.




WWW.JULA.COM

© JULA AB 2022-12-05

JULA AB

BOX 363, 532 24 SKARA, SWEDEN



   <p>RECHARGEABLE WORK LIGHT LED</p> <p>023956, 023956 Rechargeable Work Light LED, Rechargeable Work Light LED, Work Light LED, Light LED, LED</p>	<p>anslut 023956 Rechargeable Work Light LED [pdf] Instruction Manual</p> <p>023956, 023956 Rechargeable Work Light LED, Rechargeable Work Light LED, Work Light LED, Light LED, LED</p>
--	--