



ANSMANN FL800AC Portable Floodlight User Manual

[Home](#) » [ANSMANN](#) » ANSMANN FL800AC Portable Floodlight User Manual 

ANSMANN FL800AC Portable Floodlight User Manual



Contents

- 1 SCOPE OF DELIVERY
- 2 INTENDED USE
- 3 SIGNS AND SYMBOLS
- 4 SAFETY INSTRUCTIONS
- 5 PRODUCT DESCRIPTION
- 6 SETUP INSTRUCTIONS
- 7 SETTING THE FLOODLIGHT
- 8 STARTING OPERATION
- 9 CLEANING
- 10 DISPOSAL
- 11 DISCLAIMERS
- 12 WARRANTY INFORMATION
- 13 TECHNICAL DATA
- 14 Documents / Resources
 - 14.1 References
- 15 Related Posts

SCOPE OF DELIVERY

- 1x Portable floodlight
- 1x Instruction manual

First unpack the product and check it for completeness and damages. Do not operate the product if it is damaged. Contact your retailer should you find any damage to the product.

INTENDED USE

The product serves as a mobile light source for working spaces, open spaces, etc. It is supplied with power via a power outlet. The product can be set up on the ground, suspended or carried by the handle. The product is designed exclusively for household use; it is not suitable for commercial purposes.

SIGNS AND SYMBOLS

Please adhere to the following signs and warnings used in the instruction manual, on the product and on the packaging.



= Information

Additional useful information about the product



= Notice

This notice informs the user of possible damages of all kinds



= Warning

Can result in serious injury or death



= Caution


Can result in minor or moderate injuries



= Protection class I



= Do not look into the light beam



= Replace any broken safety cover



= Rough service

SAFETY INSTRUCTIONS



Carefully read the entire instruction manual before first operating the product.

It contains important information on handling the product.

If you give the product to third parties, you must include this instruction manual.

- Keep children away from the product and the packaging. The product is not a toy. Children should be supervised to ensure that they do not play with the product.
- Before connecting the product with the power supply, always make sure that the supply voltage complies with the information on the rating plate.
- This product complies with protection class IP54/ IP65: Protected against the ingress of dust into hazardous

and sensitive components. Splashproof. Do not immerse the product in water.

- In order to ensure protection class IP44 (splashproof) for the plug, the product must be connected with a power outlet of protection class IP44.
- Never touch the product with wet or damp hands.
- Always ensure that the power cord is not taut nor comes into contact with sharp objects, chemicals or solvents.
- Regularly check the power cord and power plug for damages.
- To avoid hazards, the flexible exterior cord of this floodlight, if damaged, may only be replaced by the manufacturer, its service representative or a comparable professional.



This product complies with protection class I and must therefore be connected to the protective earth conductor.



Do not look directly into the beam of light.

Do not shine the light in the faces of others.

Looking into the beam of light for too long may cause damage to the retina due to blue light.

- Safe operation cannot be guaranteed if the product shows any kind of damage. If the product is damaged, it must be disposed of or repaired.
- Do not repair the product yourself! Have repairs carried out by a professional electrician.




Caution: The light source of this luminaire is not replaceable. When the light source reaches its end of life the whole luminaire shall be replaced.



Warning: Fire hazard! Do not cover the product during operation and keep it away from inflammable surfaces.

PRODUCT DESCRIPTION

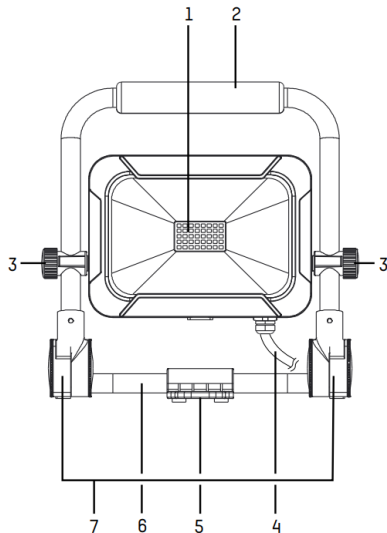

1. LEDs
2. Handle
3. Set screws
4. Power cord with power plug
5. Suspension eyelet
6. Stand
7. Joints

SETUP INSTRUCTIONS

- Always carry the product by the handle.
- Always set up the product on the stand.
- Always suspend the product by the suspension eyelet.
- The joints have some resistance to prevent unintentional adjustments. Adjust the angle of the stand slowly, avoid jerky movements.

SETTING THE FLOODLIGHT

- Loosen both set screws.
- Adjust the angle of the floodlight.
- Re-tighten the set screws.

STARTING OPERATION

The product does not have a switch. It is turned on and off directly via the power supply.

- Turn on: Plug the power plug into a suitable power outlet.
- Turn off: Disconnect the power plug from the power outlet.

CLEANING

- Always disconnect the power supply before cleaning the product.
- Use only a soft, dry or slightly damp cloth (where necessary with a little mild dishwashing detergent) to clean the product. Never use any abrasive cleaners or solvents to clean the product.

DISPOSAL



At the end of its service life, dispose of the light in keeping with all legal requirements. The dustbin symbol indicates that waste electrical and electronic equipment may not be disposed of with normal household waste within the EU. Please use local recycling and collection points or contact the retailer where you purchased the product.



You thus fulfill your statutory obligations and contribute to protection of the environment.

DISCLAIMERS

The information contained in this instruction manual is subject to change without prior notice. ANSMANN assumes no liability for direct, indirect, accidental or other types of damage or consequential damage that result from improper handling of the product or failure to comply with the information contained in this instruction manual. We assume no liability and grant no warranty claims in cases of improper use of the product.

WARRANTY INFORMATION

We offer a ten-year warranty on the product.
Damages to the product due to failure to observe the instruction manual will void the warranty.
This does not affect your legal warranty right.

You can find our warranty terms online at www.ansmann.de

TECHNICAL DATA

Mode	1600-0277: FL8 00AC	1600-0278: FL1 600AC	1600-0279: FL2 400AC	1600-0403: FL4 500AC	1600-0404: FL7 200AC
Supply voltage	230 V~, 50/60 Hz			220-240 V~, 50/60 Hz	
Power output in w atts	10 W	20 W	30 W	50W	80W
IP protection class	IP54 (splashproof)			IP65	
IK protection class	IK05				
IP protection class (plug)	IP44 (splashproof)				
Protection class	I				
Luminary type	LED				

Colour temperature	5000 K				
Colour rendering index (CRI)	>80 Ra				
Nominal luminous flux	900 lm	1800 lm	2700 lm	4500lm	7200lm
Max. projection area	454 cm2	697 cm2	827 cm2	1053 cm2	2 1211 cm2
Use site	Indoors and outdoors				
Operating temperature ta	-20 to +50 °C				
Glass dimensions (W x B x D) – approx.	90 x 124 x 4 m	128 x 178 x 4 m	147 x 202 x 4 m	161 x 213 x 4 m	172 x 249 x 5 m
Dimensions (W x B x D) – approx.	209 x 217 x 144 mm	264 x 264 x 149 mm	289 x 286 x 164 mm	320 x 329 x 206 mm	355 x 341 x 227 mm
Weight – approx.	0,91 kg	1,4 kg	1,71 kg	2,17 kg	3,13 kg

Rough service	Yes	Yes	Yes	No	No
---------------	-----	-----	-----	----	----



www.tuv.com

ID 1419068832

ID 1419068823



The product meets the conditions of the European Union.

Customer service:

ANSMANN AG
Industriestrasse 10
97959 Assamstadt
Germany


Support & FAQ: ansmann.de

E-Mail: hotline@ansmann.de
Hotline: +49 (0) 6294 / 4204 3400



MA-1600-0277/-0278/-0279/-0403/-0404/V4/04-2022



Documents / Resources

 <p>BEDIENUNGSANLEITUNG USER MANUAL PORTABLE FLOODLIGHT 1600-0277 FL800AC 1600-0278 FL800AC 1600-0279 FL2400AC 1600-0403 FL4500AC 1600-0404 FL7200AC</p>	<p>ANSMANN FL800AC Portable Floodlight [pdf] User Manual FL800AC Portable Floodlight, FL800AC, Portable Floodlight, Floodlight</p>
---	--

References

-  [ANSMANN AG](#)
-  [ANSMANN AG](#)
-  [TÜV Rheinland - Home](#) | [US](#) | [TÜV Rheinland](#)

Manuals+.