




# APEX WAVES NI PXI-2523 26-Channel DPDT Relay Module User Manual

[Home](#) » [APEX WAVES](#) » APEX WAVES NI PXI-2523 26-Channel DPDT Relay Module User Manual 

## Contents

- [1 APEX WAVES NI PXI-2523 26-Channel DPDT Relay Module](#)
- [2 Product Information](#)
- [3 Specifications](#)
- [4 About These Specifications](#)
- [5 Input Characteristics](#)
- [6 Dynamic Characteristics](#)
- [7 Trigger Characteristics](#)
- [8 Physical Characteristics](#)
- [9 Environment](#)
- [10 Shock and Vibration](#)
- [11 Diagrams](#)
- [12 Accessories](#)
- [13 Compliance and Certifications](#)
- [14 Electromagnetic Compatibility](#)
- [15 COMPREHENSIVE SERVICES](#)
- [16 SELL YOUR SURPLUS](#)
- [17 Documents / Resources](#)
  - [17.1 References](#)
- [18 Related Posts](#)



**APEX WAVES NI PXI-2523 26-Channel DPDT Relay Module**



## Product Information

The PXI-2523 is a 26-channel DPDT (Double-Pole Double-Throw) relay module. It is a general-purpose relay module that provides switching capabilities for various applications. The module is non-latching, meaning it does not require continuous power to maintain its relay positions. The specifications listed in this document outline the performance and characteristics of the PXI-2523 module.

## Specifications

- **Topology:** 26-channel DPDT, non-latching
- **Maximum switching voltage:**
  - **Channel-to-channel:** 100 V
  - **Channel-to-ground:** 100 V, CAT I (Measurement Category I)
- **Switching Power Limit:** 60 W, 62.5 VA
- **DC Path Resistance:** Initial – [No value provided in the text]

**Note:** The PXI-2523 module is designed for use with signal voltages not exceeding 100 V. It is not suitable for connection to higher voltage circuits or mains supply circuits (115 or 230 VAC). It is important to refer to the safety and electromagnetic compatibility documents for proper usage and precautions.

This document lists specifications for the NI PXI-2523 general-purpose relay module. All specifications are subject to change without notice. Visit [ni.com/manuals](http://ni.com/manuals) for the most current specifications.

**Caution:** The protection provided by the NI PXI-2523 can be impaired if it is used in a manner not described in this document.

- **Topology**..... 26-channel DPDT, non-latching

Refer to the NI Switches Help for detailed topology information.

## About These Specifications

- Specifications characterize the warranted performance of the instrument under the stated operating conditions.
- Typical Specifications are specifications met by the majority of the instrument under the stated operating conditions and are tested at 23 °C ambient temperature. Typical specifications are not warranted.
- All voltages are specified in DC, ACpk, or a combination unless otherwise specified.

**Caution:** Refer to the Read Me First: Safety and Electromagnetic Compatibility document for important safety and electromagnetic compatibility information. To obtain a copy of this document online, visit [ni.com/manuals](https://ni.com/manuals), and search for the document title. To ensure the specified EMC performance, operate this product only with shielded cables and accessories.

**Input Characteristics**

Maximum switching voltage

- **Channel-to-channel**..... 100 V
- **Channel-to-ground**..... 100 V, CAT I

**Caution:** This module is rated for Measurement Category I and intended to carry signal voltages no greater than 100 V. This module can withstand up to 500 V impulse voltage. Do not use this module for connection to signals or for measurements within Categories II, III, or IV. Do not connect to MAINS supply circuits (for example, wall outlets) of 115 or 230 VAC. Refer to the Read Me First: Safety and Electromagnetic Compatibility document for more information on measurement categories. When hazardous voltages (>42.4 Vpk/60 VDC) are present on any relay terminal, safety low-voltage ( $\leq 42.4$  Vpk/60 VDC) cannot be connected to any other relay terminal. The switching power is limited by the maximum switching current, the maximum voltage, and must not exceed 60 W, 62.5 VA.

- **Maximum switching power (per channel)** .....60 W, 62.5 VA (DC to 60 Hz)
- **Maximum current (switching or carry, per channel)** .....2 A Simultaneous channels at maximum
- **current ( $\leq 55\text{ }^{\circ}\text{C}$ )** .....26
- **Minimum switching conditions** .....20 mV/1 mA

**Note** Switching inductive loads (for example, motors and solenoids) can produce high voltage transients in excess of the module’s rated voltage. Without additional protection, these transients can interfere with module operation and impact relay life.

- For more information about transient suppression, visit [ni.com/info](https://ni.com/info) and enter the
- Info Code relayflyback.

**DC path resistance**

- **Initial**..... $<0.5\text{ }\Omega$
- **End-of-life**.....  $\geq 1.0\text{ }\Omega$

DC path resistance typically remains low for the life of the relay. At the end of relay life, the path resistance rises rapidly above 1  $\Omega$ . Load ratings apply to relays used within the specification before the end of relay life.

- **Thermal EMF (typical at 23  $^{\circ}\text{C}$ )** .....12  $\mu\text{V}$
- **Bandwidth (-3 dB, 50  $\Omega$  termination, typical at 23  $^{\circ}\text{C}$ )**
  - **1-wire** .....  $\leq 70\text{ MHz}$
  - **2-wire** .....  $\leq 35\text{ MHz}$
- **Crosstalk (typical at 23  $^{\circ}\text{C}$ , 50  $\Omega$  termination)**

- **Channel-to-channel**
  - **10 kHz**..... ≤-65 dB
  - **100 kHz**..... ≤-45 dB

Isolation (typical at 23 °C, 50 Ω termination)

## Open channel

- **10 kHz**..... ≥75 dB
- **100 kHz**..... ≥55 dB

## Dynamic Characteristics

### Relay operate time

- **Typical** ..... 1 ms
- **Maximum**..... 3.4 ms
- **Simultaneous drive limit**..... 26 relays

**Note** Certain applications may require additional time for proper settling. For information about including additional settling time, refer to the NI Switches Help.

### Expected relay life

**UMechanical**..... 1 × 10<sup>8</sup> cycles

### Electrical (resistive)

- **30 V, 1 A**..... 5 × 10<sup>5</sup> cycles
- **30 V, 2 A**..... 1 × 10<sup>5</sup> cycles

**Note** The relays used in the NI PXI-2523 are field replaceable. Refer to the NI Switches Help for information about replacing a failed relay.

## Trigger Characteristics

### Input trigger

- **Sources**..... PXI trigger lines 0-7
- **Minimum pulse width**..... 150 ns

**Note** The NI PXI-2523 can recognize trigger pulse widths less than 150 ns if you disable digital filtering. For information about disabling digital filtering, refer to the NI Switches Help.

### Output trigger

- **Destinations** ..... PXI trigger lines 0-7

- **Pulse width** ..... Programmable (1  $\mu$ s to 62  $\mu$ s)

## Physical Characteristics

- **Relay type** ..... Electromechanical, non-latching
- **Relay contact material** ..... Palladium-ruthenium, gold covered
- **I/O connector** ..... 160 DIN 41612, 160 positions, male
- **PXI power requirement** ..... 5 W at 5 V, 2.5 W at 3.3 V
- **Dimensions (L  $\times$  W  $\times$  H)** ..... 3U, one slot, PXI/cPCI module 21.6  $\times$  2.0  $\times$  13.0 cm (8.5  $\times$  0.8  $\times$  5.1 in.)
- **Weight** ..... 175 g (6.2 oz)

## Environment

- **Operating temperature** ..... 0  $^{\circ}$ C to 55  $^{\circ}$ C
- **Storage temperature** ..... -20  $^{\circ}$ C to 70  $^{\circ}$ C
- **Relative humidity** ..... 5% to 85% noncondensing
- **Pollution Degree** ..... 2
- **Maximum altitude** ..... 2,000 m

Indoor use only.

## Shock and Vibration


- **Operational Shock** ..... 30 g peak, half-sine, 11 ms pulse
  - (Tested in accordance with IEC 60068-2-27.
  - Test profile developed in accordance with MIL-PRF-28800F.)

## Random Vibration


- **Operating** ..... 5 to 500 Hz, 0.3 grms
- **Nonoperating** ..... 5 to 500 Hz, 2.4 grms
  - (Tested in accordance with IEC 60068-2-64.
  - Nonoperating test profile exceeds the requirements of MIL-PRF-28800F, Class 3.)

## Diagrams

### NI PXI-2523 Hardware Diagram

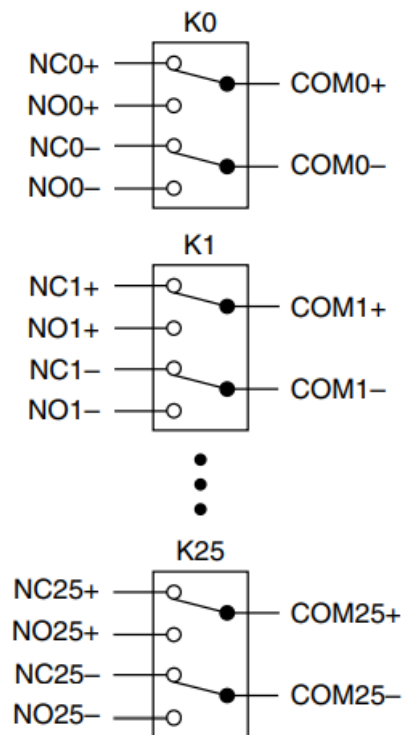

## NI PXI-2523 Connector Pinout

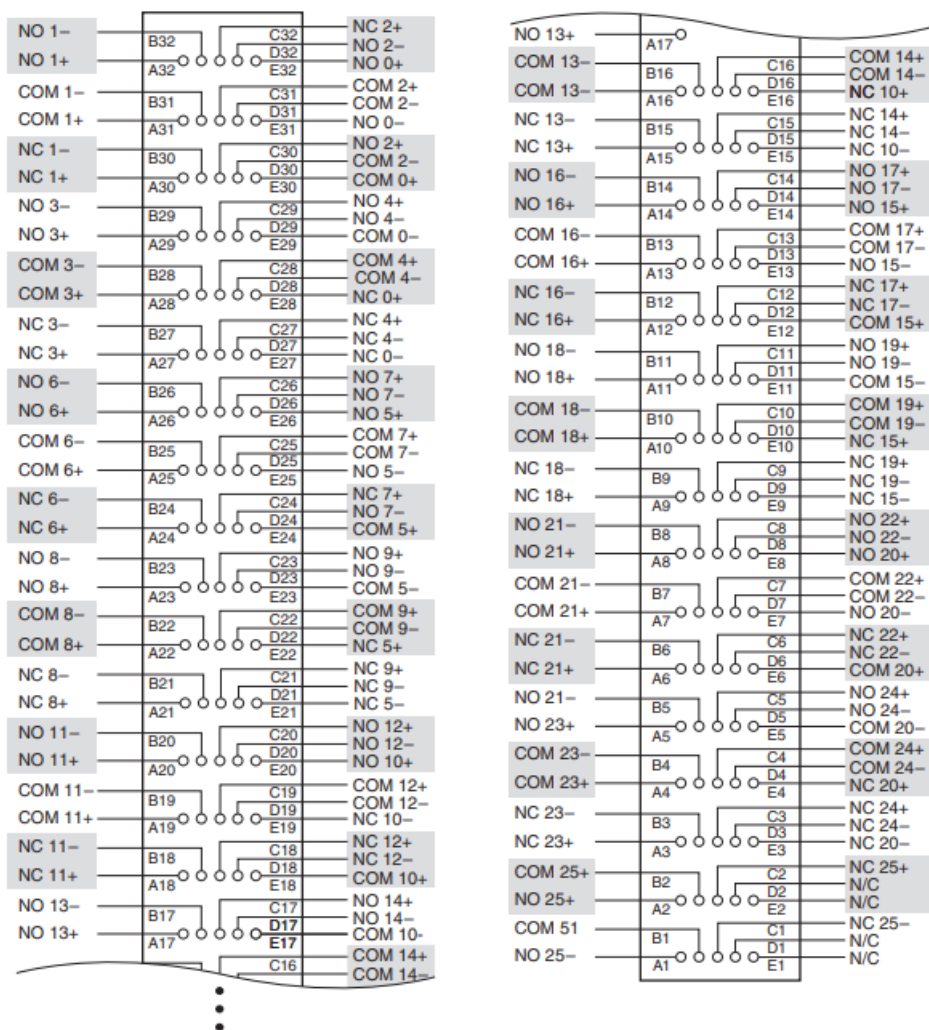

## Accessories

Table 1. NI Accessories for the NI PXI-2523

Accessory	Part Number
DIN160 to 50 Pin DSUB switch cable, 1 m	782417-03
DIN160 to DIN160 switch cable, 1 m	782417-02
DIN160 to bare wire switch cable, 1 m	782417-01
Relay replacement kit	781089-10

## Compliance and Certifications

### Safety

This product meets the requirements of the following standards of safety for electrical equipment for measurement, control, and laboratory use:

- IEC 61010-1, EN 61010-1
- UL 61010-1, CSA 61010-1

**Note** For UL and other safety certifications, refer to the product label or the Online Product Certification section.

### Electromagnetic Compatibility

This product meets the requirements of the following EMC standards for electrical equipment for measurement, control, and laboratory use:

- **EN 61326-1 (IEC 61326-1):** Class A emissions; Basic immunity
- **EN 55011 (CISPR 11):** Group 1, Class A emissions
- **AS/NZS CISPR 11:** Group 1, Class A emissions
- **FCC 47 CFR Part 15B:** Class A emissions
- **ICES-001:** Class A emissions

### Note

- In the United States (per FCC 47 CFR), Class A equipment is intended for use in commercial, light-industrial, and heavy-industrial locations. In Europe, Canada, Australia and New Zealand (per CISPR 11) Class A equipment is intended for use only in heavy-industrial locations.
- Group 1 equipment (per CISPR 11) is any industrial, scientific, or medical equipment that does not intentionally generate radio frequency energy for the treatment of material or inspection/analysis purposes.
- For EMC declarations and certifications, and additional information, refer to the Online Product Certification section.

### CE Compliance

This product meets the essential requirements of applicable European Directives as follows:

- 2006/95/EC; Low-Voltage Directive (safety)
- 2004/108/EC; Electromagnetic Compatibility Directive (EMC)

## Online Product Certification

To obtain product certifications and the Declaration of Conformity (DoC) for this product, visit [ni.com/certification](https://ni.com/certification), search by model number or product line, and click the appropriate link in the Certification column

## Environmental Management

- NI is committed to designing and manufacturing products in an environmentally responsible manner. NI recognizes that eliminating certain hazardous substances from our products is beneficial to the environment and to NI customers.
- For additional environmental information, refer to the Minimize Our Environmental Impact web page at [ni.com/environment](https://ni.com/environment). This page contains the environmental regulations and directives with which NI complies, as well as other environmental information not included in this document.

## Waste Electrical and Electronic Equipment (WEEE)

- EU Customers At the end of the product life cycle, all products must be sent to a WEEE recycling center. For more information about WEEE recycling centers,
- National Instruments WEEE initiatives, and compliance with WEEE Directive 2002/96/EC on Waste Electrical and Electronic Equipment, visit [ni.com/environment/weee](https://ni.com/environment/weee).

LabVIEW, National Instruments, NI, ni.com, the National Instruments corporate logo, and the Eagle logo are trademarks of National Instruments Corporation. Refer to the Trademark Information at [ni.com/trademarks](https://ni.com/trademarks) for other National Instruments trademarks. Other product and company names mentioned herein are trademarks or trade names of their respective companies. For patents covering National Instruments products/technology, refer to the appropriate location: Help»Patents in your software, the patents.txt file on your media, or the National Instruments Patents Notice at [ni.com/patents](https://ni.com/patents). You can find information about end-user license agreements (EULAs) and third-party legal notices in the NI-SWITCH Readme. Refer to the Export Compliance Information at [ni.com/legal/export-compliance](https://ni.com/legal/export-compliance) for the National Instruments global trade compliance policy and how to obtain relevant HTS codes, ECCNs, and other import/export data.

## COMPREHENSIVE SERVICES

- We offer competitive repair and calibration services, as well as easily accessible documentation and free downloadable resources.

## SELL YOUR SURPLUS

We buy new, used, decommissioned, and surplus parts from every NI series  
We work out the best solution to suit your individual needs.

- Sell For Cash
- Get Credit
- Receive a Trade-In Deal

## OBSOLETE NI HARDWARE IN STOCK & READY TO SHIP

We stock New, New Surplus, Refurbished, and Reconditioned NI Hardware.



- Request a Quote CLICK HERE ( [https://www.apexwaves.com/modular-systems/national-instruments/pxi-relay-modules/PXI-2523?aw\\_referrer=pdf](https://www.apexwaves.com/modular-systems/national-instruments/pxi-relay-modules/PXI-2523?aw_referrer=pdf) ) PXI-2523


Bridging the gap between the manufacturer and your legacy Test system.

## Contact

- tell: 1-800-915-6216
- web: [www.apexwaves.com](http://www.apexwaves.com)
- email: [sales@apexwaves.com](mailto:sales@apexwaves.com)

All trademarks, brands, and brand names are the property of their respective owners

## Documents / Resources

	<p><b><a href="#">APEX WAVES NI PXI-2523 26-Channel DPDT Relay Module</a></b> [pdf] User Manual          NI PXI-2523 26-Channel DPDT Relay Module, NI PXI-2523, 26-Channel DPDT Relay Module, DPDT Relay Module, Relay Module, Module</p>
---	---

## References

-  [Engineer Ambitiously - NI](#)
-  [Engineer Ambitiously - NI](#)
-  [Product Certifications - NI](#)
-  [Engineering a Healthy Planet - NI](#)
-  [Managing Critical Substances - NI](#)
-  [Using Info Codes - NI](#)
-  [Trade Compliance - NI](#)
-  [Product Documentation - NI](#)
-  [National Instruments Patents - NI](#)
-  [NI Trademarks and Logo Guidelines - NI](#)
-  [PXI-2523 National Instruments Relay Module | Apex Waves](#)