




apollo 53832-070 Minidisc Remote Indicator User Manual

[Home](#) » [APOLLO](#) » apollo 53832-070 Minidisc Remote Indicator User Manual 

Contents

- [1 apollo 53832-070 Minidisc Remote Indicator](#)
- [2 MINIDISC REMOTE INDICATOR](#)
- [3 Documents / Resources](#)
- [4 Related Posts](#)

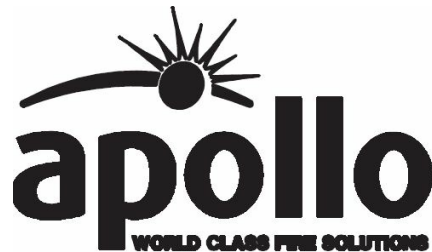


apollo 53832-070 Minidisc Remote Indicator



MINIDISC REMOTE INDICATOR

PART No. 53832-070/072

THE REMOTE INDICATOR IS POLARITY SENSITIVE CONNECT POSITIVE LINE TO TERMINAL A OR B AND NEGATIVE LINE TO TERMINAL C.

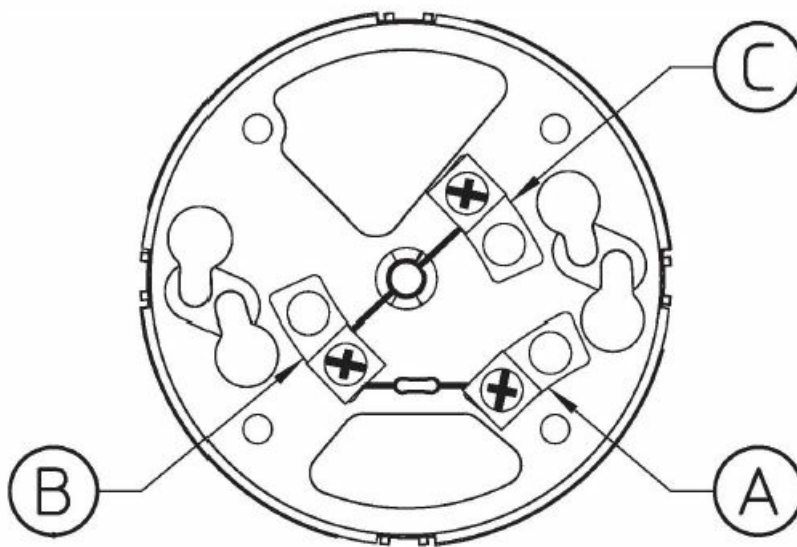

DETECTOR RANGE & CONNECTIONS

- SERIES 60: A & C
- SERIES 60 INTRINSICALLY SAFE: A & C
- XP95: A & C
- XP95 INTRINSICALLY SAFE: B & C
- DISCOVERY: A & C
- ALARMSENSE: B & C
- ORBIS: A & C
- VOLT AGE, A & C: 5 – 36V
- MAX CURRENT, B & C: 25mA, UP TO 40°C
- OPERATING TEMPERATURE: -10° TO +60°C

Documents / Resources



[apollo 53832-070 Minidisc Remote Indicator](#) [pdf] User Manual
53832-070 Minidisc Remote Indicator, 53832-070, Minidisc Remote Indicator, Remote Indicator , Indicator