




# ArduCam B0348 Pivariety Color Global Shutter Camera Module for Raspberry Pi User Guide

[Home](#) » [ArduCam](#) » ArduCam B0348 Pivariety Color Global Shutter Camera Module for Raspberry Pi User Guide 



Pivariety Color Global Shutter  
Camera Module for Raspberry Pi  
2MP OG02B10  
(SKU: B0348)  
QUICK START GUIDE

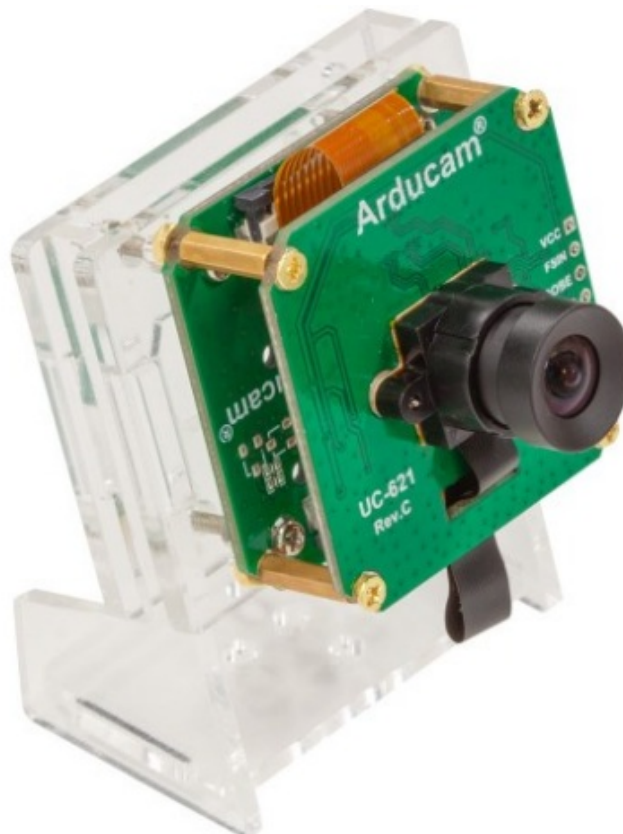

## Contents

- [1 INTRODUCTION](#)
- [2 SPECS](#)
- [3 SOFTWARE](#)
- [4 TROUBLESHOOT](#)
- [5 Documents / Resources](#)
  - [5.1 References](#)
- [6 Related Posts](#)

## INTRODUCTION

- **About Arducam**

Arducam has been a professional designer and manufacturer of SPI, MIPI, DVP, and USB cameras since 2012. We also offer customized turnkey design and manufacturing solution services for customers who want their products to be unique.

- **About This Pivariety Camera**

Arducam Pivariety is a Raspberry Pi camera solution to take the advantage of using its hardware ISP functions. Pivariety camera modules make users get better performance and a wider variety of camera, lens options. In other words, Pivariety breakthrough the limitations of the closed-source official supported camera driver and camera modules (V1/ V2/H Q).

Pivariety camera modules made it possible to be well-tuned ISP with Auto Exposure, Auto White Balance, Auto Gain Control, Lens Shading Correction, etc. This series of cameras use the lib camera framework, they can't be supported by Raspistill, and the way to access the camera is lib camera SDK (for C++)/lib camera-still/lib camera-vid/Gstreamer.

This Pivariety OGO2B10 Color Global Shutter Camera is migrated Raspberry Pi Cameras, which eliminate rolling shutter artifacts to shoot high-speed moving objects in color sharp images.

## SPECS

Image Sensor	2MP OG02B10
Max. Resolution	1600Hx1300V
Pixel Size	3um x 3um
Optical Format	1/2.9"
Lens Spec	Mount: M12
	Focal length: 2.8mm±5%
	F.NO: 2.8
	FOV: 110deg (H)
IR Sensitivity	Integral IR filter, visible light only
Frame Rate	1600×1300@60fps; 1600×1080@80fps; 1280×720@120fps
Sensor Output Format	RAW10, RAW8
ISP Output Format	The output image format of JPG, YUV420, RAW, DNG The output video format of MJPEG, H.264
Interface Type	2-Lane MIPI
Adapter Board Size	40mm×40mm
Board Size	40mm×40mm

## SOFTWARE

### 1. Driver Installation

```
wget -O install_pivariety_pkgs.sh https://github.com/ArduCAM/Arducam-Pivariety-V4L2-Driver/releases/download/install\_script/install\_pivariety\_pkgs.sh
```

```
chmod +x install_pivariety_pkgs.sh
```

```
./install_pivariety_pkgs.sh -p kernel_driver
```

press y to reboot

**NOTE:** The kernel driver installation is only supported by the latest version 5.10. For other kernel versions, please go to our Doc page: <https://www.arducam.com/docs/cameras-for-raspberry-pi/pivariety/how-to-install-kernel-driver-for-pivarietycamera/#2-how-to-build-raspberry-pi-kernel-driverfor-arducam-pivariety-camera>

You can also visit this doc page to refer to the hardware connection:

<https://www.arducam.com/docs/cameras-for-raspberry-pi/pivariety/pivarietyog02b10-2mp-color-global-shutter-camera-module/>

### 2. Test the Driver and Camera

After you've finished the hardware assembly and driver installation, you can test whether the camera is detected and working.

#### • View the Status of Driver and Camera

```
dmesg | grep arducam
```

It will display arducam-variety if the driver installed successfully and firmware version if the camera can be detected.

The display should be probe failed if the camera can't be detected, you might have to check the ribbon connection, then reboot the Raspberry Pi.

#### • View the Video Node

The Pivariety camera modules are emulated as the standard video device under /dev/video\* node, so you can use the ls command for listing the contents in the /dev folder.

```
ls /dev/video* -l
```

Since the camera module is V4L2 compliant, you can use the V4L2 controls to list the supported color space, resolutions, and frame rates.

```
v4l2-ctl --list-formats-ext
```

**NOTE: Although the V4L2 interface is supported, only RAW format images can be obtained, without ISP support.**

### 3. Official Libcamera App Installation

```
./install_pivariety_pkgs.sh -p libcamera_dev
```

```
./install_pivariety_pkgs.sh -p libcamera_apps
```

### 4. Capture Image and Record Video

#### • Capture image

For example, preview for 5s and save the image named test.jpg

```
lib camera-still -t 5000 -o test.jpg
```

#### • Record video

For example, record an H.264 10s video with the frame size **1920W × 1080H**

```
lib camera-vid -t 10000 --width 1920 --height 1080 -o test.h264
```

**NOTE: H.264 format only supports 1920×1080 and below resolution.**

#### • Plugin gstreamer installation

Install gstreamer

```
sudo apt update
```

```
sudo apt install -y gstreamer1.0-tools
```

#### Preview

```
gst-launch-1.0 libcamerasrc ! 'video/xraw,width=1920,height=1080' ! videoconvert ! autovideosink
```

## TROUBLESHOOT

### 1. Cannot Allocate Memory

```
[3:45:35.833744413] [6019] INFO RPI raspberrypi.cpp:611 Sensor: /base/soc/i2c0mux/i2c@1/arducam@0c -
```

Selected mode:

```
5344x4012-pRAA
```

```
[3:45:35.948442507] [6019] ERROR V4L2
```

```
v4l2_videodevice.cpp:1126 /dev/video14[17:cap]: Unable to request 4 buffers: Cannot allocate memory
```

```
[3:45:35.948551358] [6019] ERROR RPI raspberrypi.cpp:808 Failed to allocate buffers
```

```
ERROR: *** failed to start camera ***
```

Edit /boot/cmdline.txt and add cma=400M at the end

More details: <https://lists.libcamera.org/pipermail/libcamera-devel/2020-December/015838.html>

### 2. The Image Displays Color Dots

Add code `--denoise cdn_off` at the end of the command

`./libcamera-still -t 5000 -o test.jpg --denoise cdn_off`

**More details:** <https://github.com/raspberrypi/libcameraapps/issues/19>

3. Failed to Install the Driver

Please check the kernel version, we only provide the driver for the latest official kernel version image when this Pivariety camera is released.

**Note:** If you want to compile the kernel driver by yourself, please refer to Doc page:

<https://www.arducam.com/docs/cameras-for-raspberry-pi/pivariety/how-to-installkernel-driver-for-pivariety-camera/>

4. Failed to import fd 18 terminate called after throwing an instance of 'std:: runtime\_error' what( ): failed to import fd 18 Aborted If you find the same error, you may make the wrong selection about the graphics driver. Please follow the Arducam Doc page to select the correct graphics driver.

If you find the same error, you may make the wrong selection about the graphics driver. Please follow the Arducam Doc page to select the correct graphics driver.

5. Switch to the native camera (raspistill etc.)



Edit the file of `/boot/config.txt`, make `dtoverlay=arducam` change to `# dtoverlay=arducam` After the modification is completed, you need to reboot the Raspberry Pi.

`sudo reboot`








NOTE: This camera module support trigger via an external signal, please refer to the Doc page to get the instruction <https://www.arducam.com/docs/cameras-for-raspberry-pi/pivariety/how-toaccess-pivariety-og02b10-2mp-color-globalshutter-camera-using-external-trigger-snapshotmode/>

If you need our help or want to customize other models of Pi cameras, feel free to contact us via [support@arducam.com](mailto:support@arducam.com)

## Documents / Resources

	<a href="#">ArduCam B0348 Pivariety Color Global Shutter Camera Module for Raspberry Pi</a> [pdf] User Guide B0348, Pivariety Color Global Shutter Camera Module for Raspberry Pi
	<a href="#">ArduCam B0348 Pivariety Color Global Shutter Camera Module for Raspberry Pi</a> [pdf] User Guide B0348, Pivariety Color Global Shutter Camera Module for Raspberry Pi

## References

-  [Simplifying embedded vision for all. - Arducam](#)
-  [Redirecting...](#)
-  [GitHub: Let's build from here · GitHub](#)
-  [Color dot problem · Issue #19 · raspberrypi/libcamera-apps · GitHub](#)
-  [Index of /pipermail](#)
-  [Simplifying embedded vision for all. - Arducam](#)
-  [Arducam Wiki](#)

