

**ARIA SENSING LT102v2 UWB Radar Module**



# ARIA SENSING LT102v2 UWB Radar Module User Manual

[Home](#) » [ARIA SENSING](#) » ARIA SENSING LT102v2 UWB Radar Module User Manual 

## Contents

- [1 ARIA SENSING LT102v2 UWB Radar Module](#)
- [2 FAQ](#)
- [3 Summary](#)
- [4 Features](#)
- [5 Operating Principle](#)
- [6 Electrical specification](#)
- [7 Block Diagram](#)
- [8 Module Connection](#)
- [9 Firmware](#)
- [10 Antenna Performances](#)
- [11 FCC STATEMENT](#)
- [12 Documents / Resources](#)
  - [12.1 References](#)



**ARIA SENSING LT102v2 UWB Radar Module**



## FAQ

### Frequently Asked Questions

- **Q:** What are the main applications of the LT102v2 UWB Radar Module?
  - **A:** The main applications include presence detection, position tracking, breath detection, and analysis in indoor environments.
- **Q:** How is the LT102v2 powered?
  - **A:** The module is USB powered when connected to a PC using a micro-B USB cable.
- **Q:** What communication interfaces does the LT102v2 support?
  - **A:** The module supports communication via USB full speed (virtual com port) and an auxiliary connector that can be used for GPIOs, SPI, and UART.

## Summary

LT102v2 radar module is a turn-key Ultra-Wide Band radar system for indoor applications. LT102v2 integrates high-end directive UWB antennas, the signal processing unit, and the communication interfaces. It is designed to fit EU EN 302 065 (EU), FCC CFR 47 Part 15 (USA), RS220 03/2009 (Canada), UWB Regulations.

## Overview



## General Specifications

- Typ. Detection range: 12 meters
- Maximum power consumption: 220mA@5V
- Operating frequency: 6.5GHz to 8.5GHz
- Power supply: 5Vdc or USB 5Vdc
- Temperature range: -40°C to +85°C
- Integrated Antenna (aperture  $\pm 60^\circ$  by  $\pm 60^\circ$ )
- Communication interfaces: USB full speed, SPI, UART
- Dimensions: 36mm x 68mm

## Applications:

- Presence detection
- Position tracking
- Breath detection and monitoring
- Gesture recognition

## Features

- The LT102v2 is a high configurable UWB radar. This module combines a full UWB transceiver and an on board MCU.
- The module is targeted for application like presence detection, position tracking, breath detection and analysis.
- The communication is achieved by an USB full speed (virtual com port). The module has an auxiliary connector that may be used as GPIOs or additional communication interface such as SPI and UART. The module is USB powered.

## Operating Principle

The operating principle of the system is based on the direct readout of the backscattered pulse

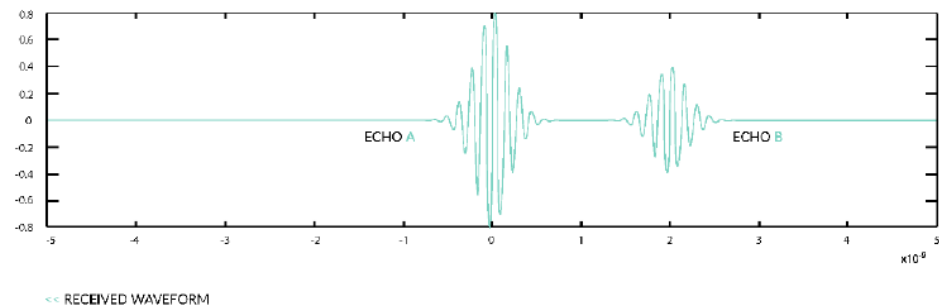
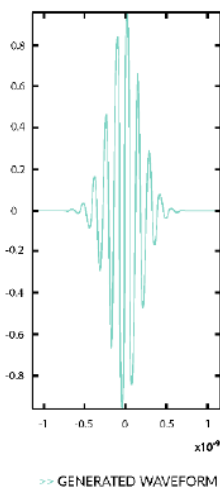


Fig. 1: The basic principle and the waveforms

- The transmitter emits pulses (Fig. 1a) which travels into space and hits the targets that are into active area of the radar
- The targets reflect part of the incoming energy (echoes) backward to the radar module (Fig. 1b).
- The receiver converts the incoming signal to digital data, these data are provided to the MCU and processed according to the application.

## Electrical specification

	Min	Typ	Max
Operating frequency	6.5GHz	7.29GHz	8.5GHz
Mean e.i.r.p. density			-41.3dBm/MHz
Peak e.i.r.p. density			0dBm/50MHz
Temperature Range	-40°C		+85°C
Supply voltage (AuxIO)	3.7V	5V	5.5V
Supply voltage (USB)		5V	
Current consumption (AuxIO)			200mA
Range resolution		6mm	
VIL			0.3 Vdd
VIH	0.7Vdd		
Rseries (AuxIO protection)		220 Ohm	

## Block Diagram

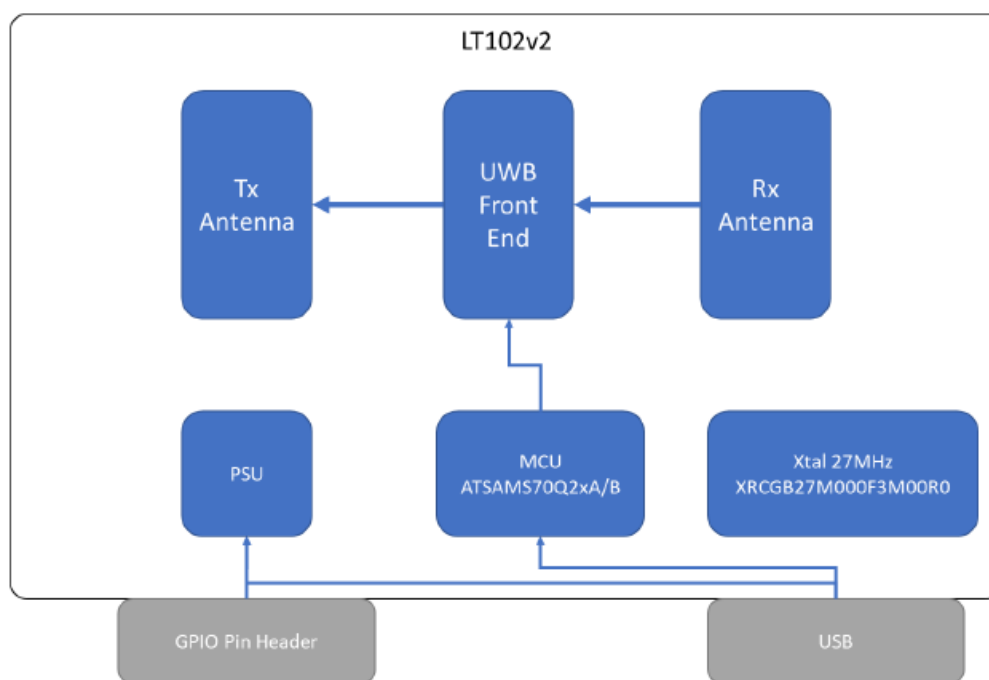
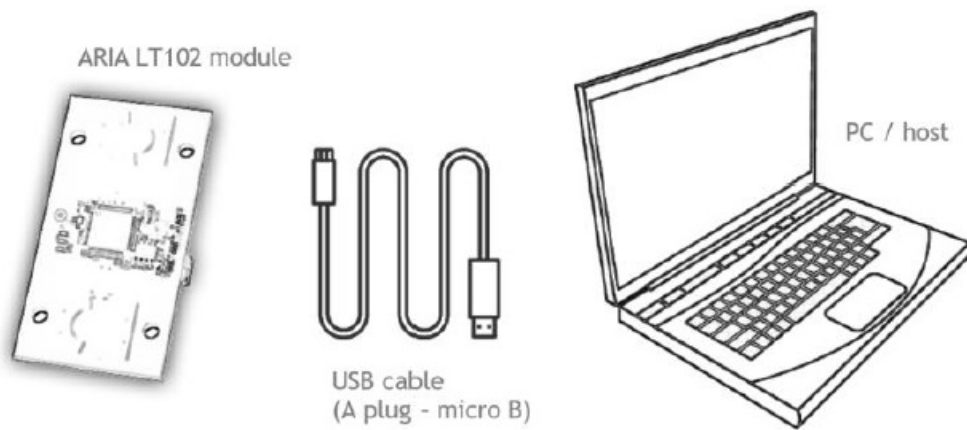


Fig. 2 LT102v2 System Diagram

- The block diagram of the LT102v2 is reported next.

## Module Connection

### USB operation



*Fig. 3: Plug and Play configuration.*

- In a default configuration, the LT102v2 module can be attached to a PC through a A-plug, micro-B USB cable.
- In this configuration, the power supply of the LT102v2 is taken from the +Vcc pin of the USB cable.

#### **Auxiliary IO connector**

- The module provides an auxiliary connector (AuxIO) that may be used to control external electronics, or as alternate communication interface (SPI and/or UART).
- When both the USB plug and the AuxIO connector are connected the power supply is taken from USB connector.

**Table 1:** AuxIO Pinout description

Pin	Description
-----	-------------

1	Vext: External Power Supply
2	Gnd: External Ground
3	RXD: UART Interface RX
4	TXD: UART Interface Tx
5	SPI0_CLK: SPI Interface #0, CLK Signal
6	SPI0_CS2: SPI Interface #0, Chip Select (active low)
7	RST: Reset (active low)
8	TDO: JTAG Interface TDO
9	SWCLK/TCLK: JTAG Interface CLK / Serial Wire Debug Interface CLK
10	TMS/SWDIO: JTAG Interface TSM / Serial Wire Debug Interface TMS
11	IO0: General Purpose I/O 0
12	IO1: General Purpose I/O 1
13	TDI: JTAG Interface TDI
14	ERASE: Erase internal flash. Leave open. To erase device flash connect to Vdd during startup
15	SPI0_MOSI: SPI Interface #0, MOSI
16	SPI0_MISO: SPI Interface #0, MISO

## Firmware

**LT102v2 module is provided with a pre-programmed FW, this FW provides:**

- Direct access to the data processing section: raw data or partially processed data
- Moving target detection algorithm
- Front-end control and parametrization

## Firmware

**LT102v2 module is provided with a pre-programmed FW, this FW provides:**

- Direct access to the data processing section: raw data or partially processed data
- Moving target detection algorithm
- Front-end control and parametrization

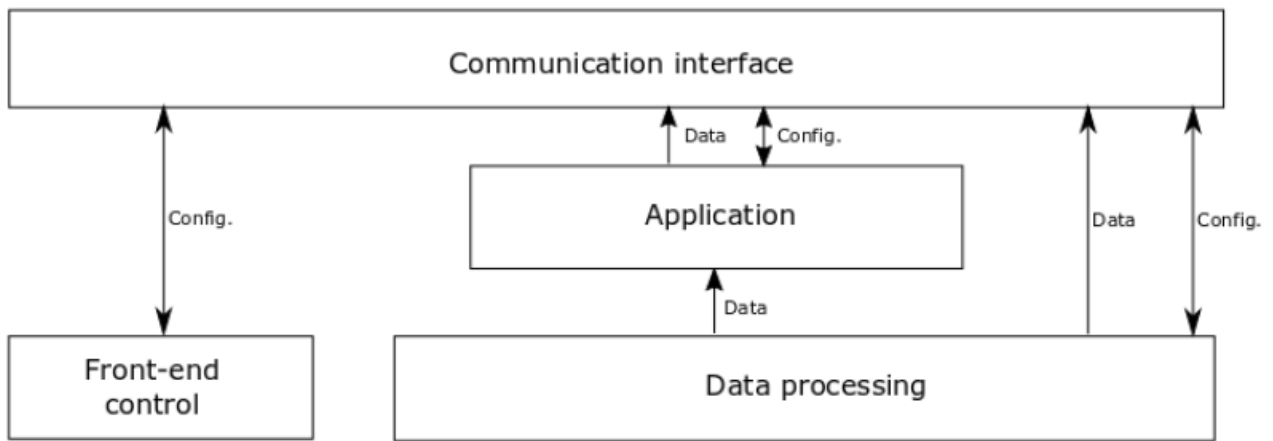


Fig. 4: FW structure

The figure shows the basic structure of the FW. Currently only one application is provided, but the module can run multiple application according to the user needs (ex. Presence detection, breath analysis, etc.). See documentation for details about communication protocol and algorithms.

## Antenna Performances

Antenna data are reported @ 7.5GHz. Maximum gain is 5.6dBi with HPBW =  $71^\circ \times 84^\circ$

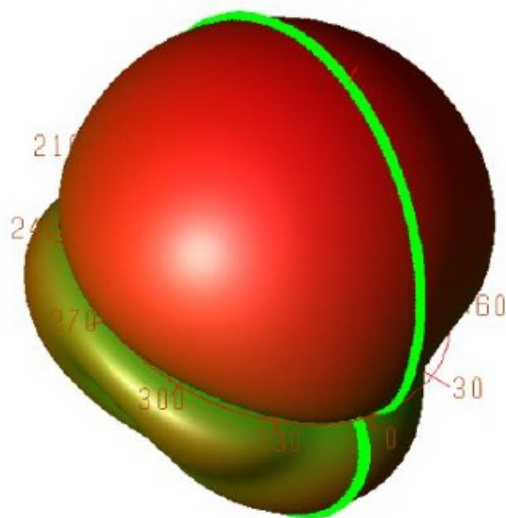


Fig. 5 Antenna Diagram and X-Z plane cut

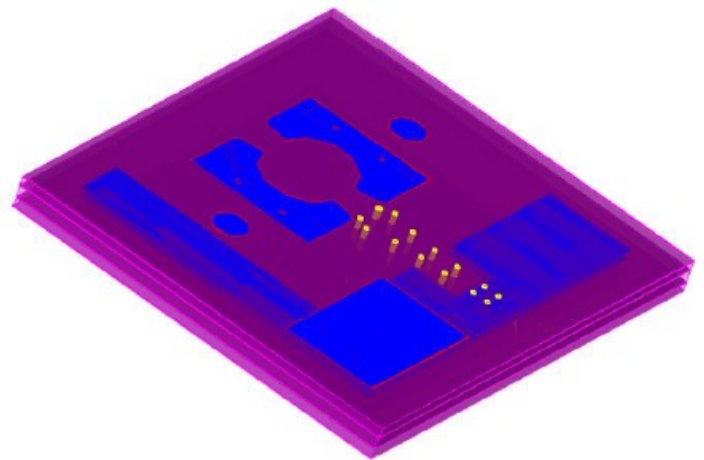


Fig. 6 Aligned View of X-Z plane



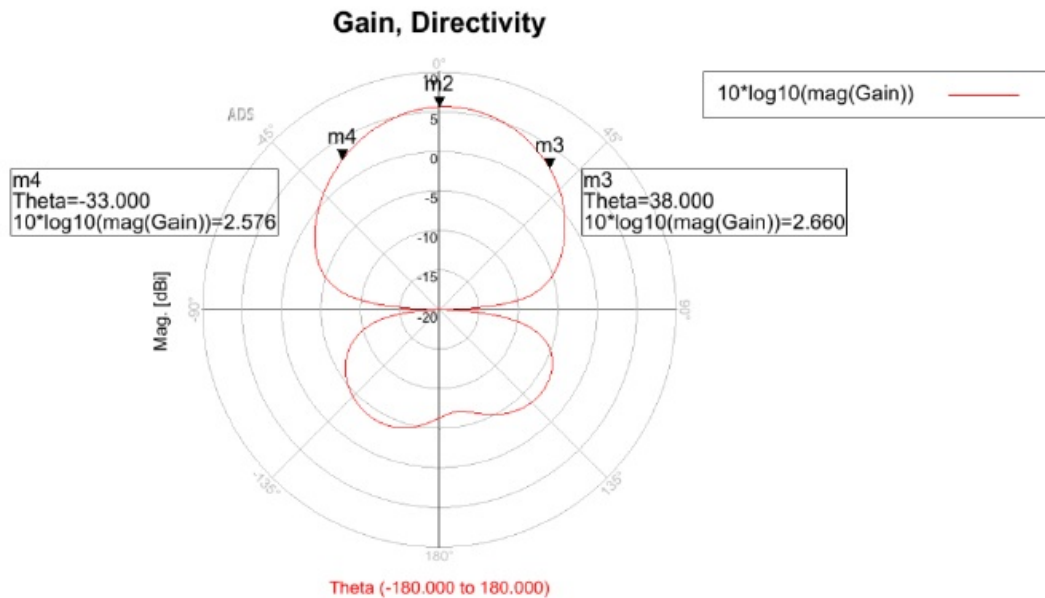


Fig. 7 Antenna Gain over X-Z plane

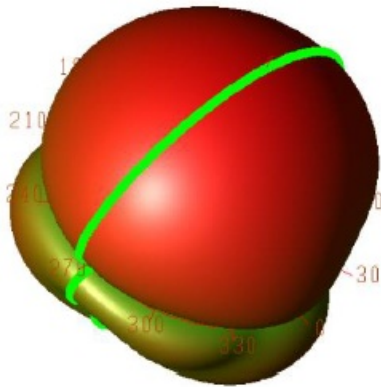


Fig. 8 Antenna Diagram and Y-Z plane cut

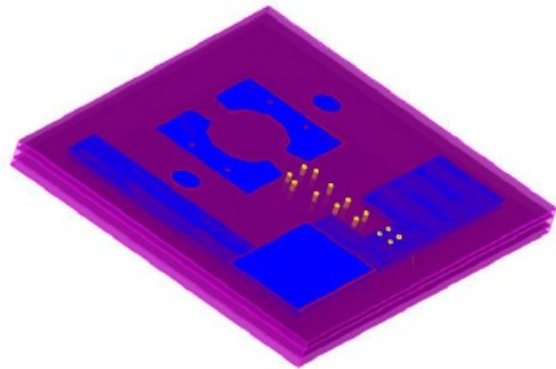


Fig. 9 Aligned View of Y-Z plane

## Communication Interface

- The FW provided implement a USB communication using a CDC Virtual comport device driver.
- See the “LT102 and LT103OEM COM Protocol” document for more details.

## FCC STATEMENT

### Regulatory Information USA

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference
2. This device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not

installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

### **RF exposure safety**

- It is designed not to exceed the emission limits for exposure to radio frequency (RF) energy set by the Federal Communications Commission.

### **Labelling Requirements for the Host Device**

The host device shall be properly labelled to identify the modules within the host device. The certification label of the module shall be clearly visible at all times when installed in the host device, otherwise, the host device must be labelled to display the FCC ID of the module, preceded by the words "Contains transmitter module", or the word "Contains", or similar wording expressing the same meaning, as follows:

**FCC ID:** 2AXYT-LT102V2

- UWB devices may not be employed for the operation of toys. Operation on-board an aircraft, a ship or a satellite is prohibited.

### **Compliance of Host Devices**

The module has been evaluated in portable stand-alone conditions. For different operational conditions from a stand-alone modular transmitter in a host (multiple, simultaneously transmitting modules or other transmitters in a host), additional testing may be required (collocation, retesting...).

The modular transmitter is only FCC authorized for the specific rule parts (i.e., FCC transmitter rules) listed on the grant, and the host product manufacturer is responsible for compliance to any other FCC rules that apply to the host not covered by the modular transmitter grant of certification. If the grantee markets their product as being Part 15 Subpart B compliant (when it also contains unintentional radiator digital circuitry), then the grantee shall provide a notice stating that the final host product still requires Part 15 Subpart B compliance testing with the modular transmitter installed. The end product with an embedded module may also need to pass the FCC Part 15 unintentional emission testing requirements and be properly authorized per FCC Part 15.


**Data:** 11/05/2024

**Author:** Technical Office

**POC:** [info@ariasensing.com](mailto:info@ariasensing.com)

Copyright © 2024 ARIA Sensing Srl

### **Documents / Resources**

 <b>CONFIDENTIAL</b>  LT102v2 UWB Radar Module  Document ID: LT102v2-UM-001 Version: 1.0 Date: 2023-01-01	<b><a href="#">ARIA SENSING LT102v2 UWB Radar Module</a></b> [pdf] User Manual LT102v2 UWB Radar Module, LT102v2, UWB Radar Module, Radar Module, Module
---	---

References

- [User Manual](#)

Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.