

ARISTA AppendixA Status Indicators User Guide

Home » ARISTA » ARISTA AppendixA Status Indicators User Guide 🖫

Appendix A Status Indicators

Contents

- 1 Front Indicators
- 2 Rear Status Indicators
- 3 Documents /

Resources


4 Related Posts

Front Indicators

Switch Indicators

Front panel LEDs are located on the right side of the chassis and display system, fan, and power supply status. Figure A-1 displays the DCS-7280CR2K-30 front panel LEDs.

Figure A-1: System Status Indicators



- 1. System status LED
- 2. Fan tray status LED

- 3. Power supply 1 status LED
- 4. Power supply 2 status LED

Table A-1 Switch Indicators LED States (Front)

LED Name	LED State	Device Status	
	Blinking Green	The system is powering up.	
System Status LED	Green	Normal operations. Due to power supply and fan redundancy, the is LED will remain green if a single fan or power supply is missing or in a failed state.	
	Blue	The locater function is active.	
	Amber	Two or more fans (any combination of fan modules or PSU fans) are disconnected or malfunctioning. The switch will automatically execute a "graceful shutdown" shortly.	
Fan Status LED	Green	All fan and power modules are operating normally.	
	Amber	Single fan module is removed or malfunctioning. It is also ambe r when a PSU is completely removed or has a stuck fan rotor.	
	Red	Two or more fans (any combination of fan modules or PSU fans) are disconnected or malfunctioning. The switch will automatically execute a "graceful shutdown" shortly.	
PSU [1:2] Status LED	Green	PSU is functioning and fully operational. AC is present, Aux out put is ON, and Main output is ON.	
	Off	PSU has been removed or is not operating properly due to AC c ord being unplugged, its fan rotor being stuck, or an internal faul t.	

Note

Arista fixed systems take approximately 5-10 minutes to boot completely.

A.1.2 Port Indicators

Port LEDs, located in the vicinity of their corresponding ports, provide a link and operational status.

Figure A-2 displays the Port LED location on the DCS-7280CR2K-30 switch.

Figure A-2: Port LEDs




Table A-2 provides status conditions that correspond to port LED states. Port LED behavior for QSFP+ and SFP+ ports is consistent.

Table A-2 Port LED States (Front)

LED State	Status
Off	Port link is down.
Green	Port link is up.
Yellow	Port is software disabled.
Flashing Yellow	Port failed diagnostics.

Rear Status Indicators

Fan and power supply modules are accessed from the rear panel. Each fan and power supply module contains an LED that reports the module status.

Fan Status LEDs are on the fan modules, as displayed in Figure A-3.

Table A-3 provides status conditions that correspond to fan status LED states.

The AC Power Supply Status LEDs are on the power supply modules, as displayed in Figure A-4.

Figure A-3: Fan Status LED



Table A-3 Fan Status LED States (Rear)

LED State	Status
Off	The fan module is not detected. If it is inserted, it may not be seated properly.
Green	The fan is operating normally. This LED state is exclusive to its fan module and independent of the streighboring fans and power supplies.
Red	The fan has failed.

Figure A-4: AC Power Supply Status LED



Handle Status LED	3. Release
-----------------------	------------

Table A-4 provides status conditions that correspond to the AC power supply status LED states.


Table A-4 AC Power Supply Status LED States (Rear)

Power Supply State	PWR-1600AC-F
Input power present Normal operation	Green
Input power present Power Supply fault	Yellow
No Input power Supply installed in chassis	Off
Input power present Supply not installed in chassis	Green

Note

You can narrow down the error condition by logging in to the switch to view the specific device state. Refer to the Arista User Manual's Switch Environment Control chapter, under the topic Viewing Environment Status, for further information on the show environment commands. Quick Start Guide: 7280CR2x-30 Series 1 RU Data Center Switches

Documents / Resources

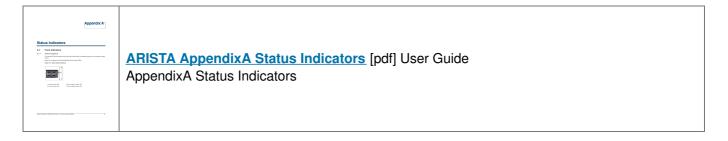

Manuals+,