



ARLEC 13A 2-Gang SP Switched Socket Instruction Manual

[Home](#) » [ARLEC](#) » ARLEC 13A 2-Gang SP Switched Socket Instruction Manual 

Contents

- [1 ARLEC 13A 2-Gang SP Switched Socket Instruction Manual](#)
- [2 Istruzioni per l'uso del prodotto](#)
- [3 FAQ](#)
- [4 ISTRUZIONI DI SICUREZZA](#)
- [5 MONTAGGIO](#)
- [6 SPECIFICHE TECNICHE](#)
- [7 GARANZIA](#)
- [8 CONTATTI](#)
- [9 Documents / Resources](#)
 - [9.1 References](#)

ARLEC 13A 2-Gang SP Switched Socket Instruction Manual



Istruzioni per l'uso del prodotto

- Mount the product in a minimum depth mounting box of 25mm.
- Clean the front plate with a dry lint-free soft cloth. Avoid using abrasive or domestic cleaners.
- Dispose of the product in an environmentally friendly manner. Do not dispose of it with household waste. Check with your local authority or retailer for recycling advice.
- Leggere tutte le istruzioni prima di iniziare l'installazione.
- Make sure not to install on freshly plastered or damp muri.
- Follow the engraved terminal markings on the actual product for wiring connections.
- Use harmonized colours for the supply conductors as per the provided table.
- Secure the product with the fixing screws provided, ensuring not to over-tighten.
- Apply pressure to the bottom centre where the notch is present for proper installation.

FAQ

- **Q:** Can I use this product on freshly plastered walls?
- **A:** No, it is not recommended to install this product on freshly plastered or damp walls as it may cause tarnishing.
- **Q:** Come devo pulire il prodotto?
- **A:** Use a dry lint-free soft cloth to clean the front plate. Avoid using abrasive or domestic cleaners.
- **Q:** What should I do when disposing of the product?
- **A:** Dispose of the product in an environmentally friendly manner. Do not dispose of it with household waste. Check with your local authority or retailer for recycling advice.

13AMP SWITCHED SOCKET OUTLETS

- Read the instructions before you begin the installation.
- Due to continuous product development, the actual product terminal marking may vary compared with the line drawing shown in the instructions. Wiring connections must be as per the engraved terminal markings on the actual product.
- Keep them in a safe place for future use.

ISTRUZIONI DI SICUREZZA

- The product must be installed by a competent person (e.g. a qualified electrician) by the relevant clauses of the current edition of the IEE Wiring Regulations (BS 7671: Requirements for Electrical Installations) and appropriate statutory regulations.
- Switch OFF the mains supply at the switchboard and make sure the installation circuit is isolated before commencing installation. Ensure no one else has access that would enable the supply to be inadvertently reconnected.
- All connections must be made as shown below, that cables are not stressed and that terminal screws are fully tightened.
- All accessories where an earth terminal is present must be correctly earthed. To do so fix the earth wire to the earth terminal on the accessory or on the metal plate and then connect a short length of the wire from this

terminal to the terminal provided in the mounting box.


- To prevent fire hazards do not exceed the rated current.

ATTENZIONE: Non installare su superfici appena intonacate o damp walls as this may cause tarnishing.

MONTAGGIO

- Partially unscrew all the terminal screws to which the cables are terminated.
- Some accessories have fixing screws clipped to the rear of the plate, unclip these screws before you begin installation.
- For accessories that come with a decorative clip-on front plate, the plate must be removed by carefully sliding a screwdriver between the ramp of the main body of the products and the notch in the lower edge of the plate. The plate can then be levered away from the main body of the product.
- Ensure the back box is firmly fixed to the wall/ceiling before you commence installation.
- If using the accessory as a replacement, remove the existing accessory from the wall.
- Inspect the mounting box (wall box) and remove if any plaster debris or dust present.
- Strip the outer sheath on all the cables, then trim wires to the appropriate length to allow the cable ends to reach the terminals.
- Strip back the inner insulation of both cables to expose 20mm of wire.
- Connect the cables as shown in the wiring diagrams below.
- Colour codes used in the UK: As of 1st April 2004 new installations in the U.K. could be wired using new EU harmonised colours for the supply conductors of twin and earth cable:


New Colours Old Colours

- BROWN-LIVE RED-LIVE
- BLUE-Neutral BLACK-Neutral
-  Earth GREEN/YELLOW
- (The old colours have been replaced from 1st April 2006).
- For accessories having one or more earth terminals, either one or all of these terminals can be used.
- Push all the wires back into the back box, ensuring the cables are not trapped or pinched. Fix the product to the back box with the fixing screws provided. Do not over-tighten.
- For accessories that come with a decorative clip-on plate, place the plate over the mounted accessory and apply finger pressure down the bottom centre where the notch is present.

13AMP 1 GANG SWITCHED SOCKET


- The diagrams below are a depiction of each wiring layout.

FROM POWER SUPPLY

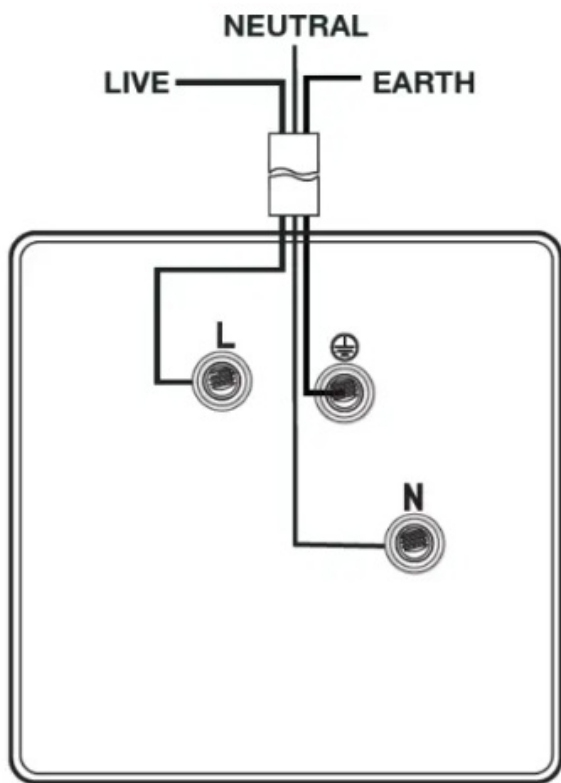


13AMP 2 GANG SWITCHED SOCKET

FROM POWER SUPPLY

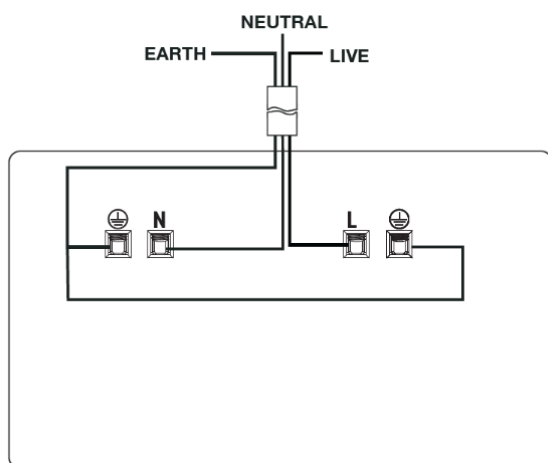

13AMP 2 GANG SWITCHED SOCKET WITH US

FROM POWER SUPPLY

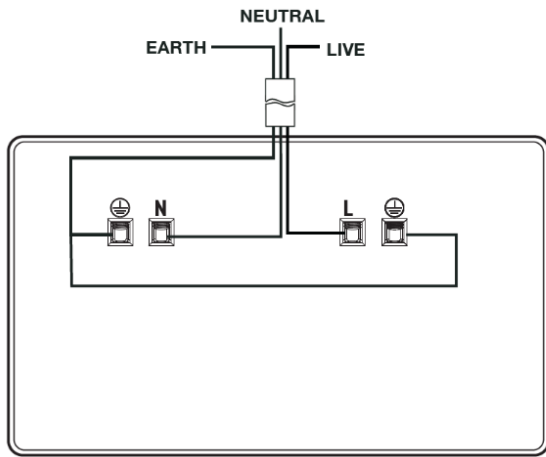

SPECIFICHE TECNICHE

- **Valutazione:** 250V a.c. 50Hz 13A
- **TERMINAL CAPACITY:** 2 x 4mm 2 3 x 2.5mm 2

MONTAGGIO

- Mounting box minimum depth 25mm.

PULIZIA

- Clean the front plate with a dry lint free soft cloth. Do not use abrasive or domestic cleaners.

DISPOSAL INSTRUCTIONS

- Dispose of the product in an environmentally friendly manner when you decide to part with it.
- This device should not be disposed of with household waste.
- Dispose of it at a recycling centre, and check with your local authority or retailer for recycling advice.
- Please note that all products with this symbol below must be recycled.



GARANZIA

- Products are protected by warranty against manufacturing defects for 12 months from the date of purchase or delivery, including against defects in production, materials and workmanship.
- In the event of a problem with the product within the warranty period please return it to your nearest store. If the item is shown to have an inherent defect present at the time of sale the store will, at its discretion, provide you with a replacement. If we are unable to repair or replace a defective product, we will refund the purchase price of the defective product in part or in full.
- This warranty does not cover the product where the fault is due to you or any third-party misuse, abuse,

neglect, or use in contravention of any oral or written instructions as to the storage, installation, commissioning, use or maintenance of the product, or where the product has been the subject of unauthorised modifications or alterations without our prior written consent, including the use of unauthorised spares, or has been the subject of commercial use. For the avoidance of doubt, the exclusions in this paragraph apply to any defect arising as a result of fair wear and tear, willful damage, negligence or abnormal working conditions, or where products differ from their description as a result of changes made to ensure they comply with applicable statutory or regulatory standards.

- The terms of this warranty shall apply to any repaired or replacement product we supply and the 12-month warranty period is treated as continuing as if the repaired or replacement product was supplied at the original date of purchase.
- Your statutory rights remain unaffected and nothing in this warranty shall limit or exclude our liability for any rights you have under the Consumer Rights Act 2015. If any part of this warranty is deemed unenforceable (including any exclusion of liability) the enforceability of any other parts of this warranty will not be affected.

CONTATTI

Si prega di conservarlo per riferimenti futuri.


Arlec Electrical Company Limited

- Il numero di telefono, l'indirizzo e l'indirizzo e-mail di Arlec sono:
- Contatto servizio clienti: 0800 112 0275
- Unit 18, Cromwell Business Park, Howard Way,
- Newport Pagnell, Buckinghamshire, MK16 9QS
- E-mail: custservice@arlec.co.uk

© This instruction leaflet is subject to copyright and must not be reproduced, copied or otherwise used in any way or for any purpose without the consent in writing of the owner, Arlec Electrical Company Limited.

Read More About This Manual & Download PDF:

Documents / Resources

	ARLEC 13A 2-Gang SP Switched Socket [pdf] Instruction Manual Gold with Black Inserts, Rose Gold with White Inserts, 13A 2-Gang SP Switched Socket, 13A, 2-Gang SP Switched Socket, SP Switched Socket, Switched Socket, Socket
-------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

References

- [User Manual](#)

