

ARROW CDC-35563-TTS Pressure Injectable Three-Lumen PICC pre-loaded with VPS TipTracker Stylet Instructions


Home » Arrow » ARROW CDC-35563-TTS Pressure Injectable Three-Lumen PICC pre-loaded with VPS TipTracker Stylet Instructions ™

Contents

- 1 ARROW CDC-35563-TTS Pressure Injectable Three-Lumen PICC pre-loaded with VPS TipTracker Stylet
- 2 Contents
- 3 Documents / Resources
- **4 Related Posts**



ARROW CDC-35563-TTS Pressure Injectable Three-Lumen PICC pre-loaded with VPS TipTracker Stylet

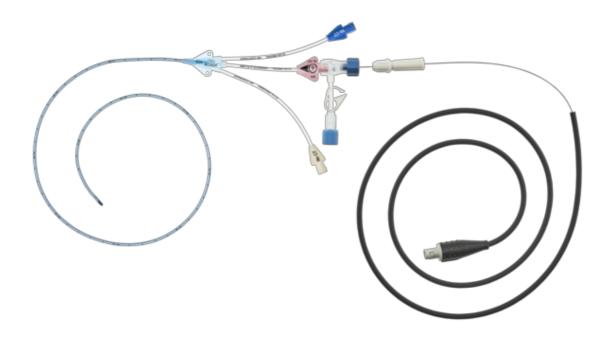

- 1: Three Lumen TaperFree® Catheter: 6 Fr. (2.14 mm OD) x 55 cm, Pressure Injectable, Blue FlexTip®,
 Contamination Guard, Arrow® VPS TipTracker™ Stylet and T-Port Connector
- 1: GlideThru[™] Peel-Away Sheath: 6 Fr. x 2-3/4" (7 cm) Radiopaque over 6 Fr. Dilator
- 1: Placement Wire Assembly
- 1: Spring-Wire Guide, Nitinol, Marked: .018" (0.46 mm) dia. x 17-3/4" (45 cm) (Straight Soft Tip on One End –
 Straight Stiff Tip on Other) with Arrow Advancer
- 1: Injection Needle: SafetyGlide™1 25 Ga. x 5/8" (1.60 cm) RW
- 1: Safety Introducer Needle: Echogenic 21 Ga. x 2-3/4" (7 cm) TW
- 1: Blunt Fill Needle: 18 Ga. x 1-1/2" (3.81 cm)
- 1: Introducer Needle: Echogenic 21 Ga. x 2-3/4" (7 cm) TW
- 1: Syringe: 10 mL Luer-Lock
- 1: Syringe: 3 mL Luer-Lock
- 4: 10 mL Luer-Lock Pre-Filled Saline Syringe
- 1: Skin Protectant Prep
- 1:5 mL 1% Lidocaine HCl Solution and Alcohol Prep
- 1: 3 mL Applicator 2% CHG and 70% IPA ChloraPrep®2 One-Step Solution
- 1: 3 mL Applicator 2% CHG and 70% IPA ChloraPrep®2 One-Step Solution with Hi-Lite Orange™ Tint
- 3: Dust Cap: Non-Vented
- 1: SecondSite™ Adjustable Hub: Fastener
- 1: SecondSite™ Adjustable Hub: Catheter Clamp
- 1: SharpsAway® Disposal Cup
- 1: SharpsAway® II Locking Disposal Cup
- 1: Catheter Trimmer
- 1: Towel: 24" x 36" (61 cm x 91 cm)
- 1: Maximal Barrier Drape[™] with two 13 cm (5") x 15 cm (6") fenestrations
- 1: Towel
- 1: Safety Scalpel: #11
- 1: Sterile Procedure Sign
- 1: Patient ID Card
- 1: Chart Sticker
- 1: Patient Information Booklet
- 1: Medication Label: 1% Lidocaine
- 1: Checklist/CLIP Sheet
- 2: Paper Tape Measure
- 1: Tourniquet
- 1: Foam Electrodes (3 per pack)
- 10: Gauze Pad: 2" x 2" (5 cm x 5 cm)
- 10: Gauze Pad: 4" x 4" (10 cm x 10 cm)
- 1: Dressing: Tegaderm®3 15.5 cm x 10 cm
- 1: Surgical Apparel: Impervious Gown
- 1: Dressing: BIOPATCH®4
- 1: Dressing: STATLOCK®5 Catheter Stabilization Device
- 1: Surgical Apparel: Mask with Eye Shield

1: Surgical Apparel: Bouffant Cap

• 1: Surgical Apparel: Mask

• 1: Equipment Cover: 13 cm x 244 cm (5" x 96")

• 1: Tape: Steri-Strip®3

• 1: HemoHopper® Fluid Receptacle

• 1: T-Piece Cover

• 1A trademark of Becton, Dickinson and Company.

• 2A registered trademark of CareFusion or one of its subsidiaries.

• 3A registered trademark of 3M Company.

• 4A registered trademark of Johnson & Johnson Corporation.

• 5A registered trademark of C. R. Bard, Inc.

Not made with natural rubber latex

Store between 20 - 25°C (68 - 77°F).

Arrow International provides the enclosed medication label(s) for your convenience. Please ensure that these labels are applied to the correct syringe and corresponding medication.

Contraindications: The Pressure Injectable PICC is contraindicated wherever there is presence of device related infections or presence of thrombosis in the intended insertion vessel or catheter pathway. Clinical assessment of the patient must be completed to ensure no contraindications exist

Lumen	Priming Volume* (mL)	Gravity Flow Rate† (mL/hr)	Pump Flow Rate†† (mL/hr)	MAX Pressure Injection Flow Rate** (mL/sec)
Distal (17 Ga.)	0.68	938	5950	6
Medial (18 Ga.)	0.49	277	2540	not rated
Proximal (18 Ga.)	0.50	284	2500	not rated

^{*} Priming volumes are approximate and are done without accessories.

6Fr. 3Lumen 55cm catheter length .018 inch dia. spring-wire guide

Documents / Resources



ARROW CDC-35563-TTS Pressure Injectable Three-Lumen PICC pre-loaded with VPS Tip Tracker Stylet [pdf] Instructions

CDC-35563-TTS Pressure Injectable Three-Lumen PICC pre-loaded with VPS TipTracker Style t, CDC-35563-TTS, Pressure Injectable Three-Lumen PICC pre-loaded with VPS TipTracker St ylet

[†] Flow rate values are approximate and are determined using deionized water at 100 cm head height.

^{††} Pump flow rates are determined at maximum pump pressure of 10 psig and represent approximate flow capabilities.

^{**} Pressure injection flow rates are determined at the injector pressure setting of 300 psi maximum using media of 11.8 centipoise viscosity, with 152 cm pressure tubing.

