



[Manuals.plus](#) /

› [KERUI](#) /

› KERUI M5 Wireless Motion Sensor Doorbell Instruction Manual

KERUI M5

KERUI M5 Wireless Motion Sensor Doorbell Instruction Manual

INTRODUCTION

The KERUI M5 Wireless Motion Sensor Doorbell is an advanced wireless system designed to provide versatile alerts for various applications. It features an infrared detector, built-in speaker, and a red flashing light to notify you of approaching individuals. With multiple operational modes and adjustable settings, it is suitable for homes, offices, shops, restaurants, and other business environments.

PACKAGE CONTENTS

Please verify that all components are present in your package:

- KERUI M5 Motion Sensor Doorbell Unit
- US Standard Power Adapter (9-15V)
- Mounting Screws and Wall Anchors
- Double-sided Adhesive Tape
- User Manual



Image: All components included in the KERUI M5 package.

SETUP AND INSTALLATION

Follow these steps to set up your KERUI M5 Wireless Motion Sensor Doorbell:

1. **Power Supply:** The unit can be powered by three AAA batteries (not included) or the included 9-15V power adapter. For continuous operation, use the power adapter. For portability or backup, insert AAA batteries into the battery compartment. Ensure batteries are inserted with correct polarity.
2. **Mounting:** Choose a suitable indoor location for the doorbell unit. It can be mounted using the provided screws and wall anchors or the double-sided adhesive tape. Ensure the unit is placed where its infrared sensor can effectively detect motion. The detection angle is 110° horizontal and 15° vertical, with a distance of 2-6 meters.
3. **Adjusting Detection Angle:** The unit features a 180° rotating gear-type bearing, allowing you to adjust the sensor's angle for optimal coverage.

3 x AAA Batteries



(Not included)



9 - 15V power adapter




(included)

Note: Using power adapter provides lasting power supply while 3 AAA batteries makes the chime alarm work without position limitation.

Tip: You can connect power adapter and put in battery at the same time, then switch on, chime alarm will change to use battery in case of power outage.

Image: Powering options for the KERUI M5 unit, including AAA batteries and AC adapter.

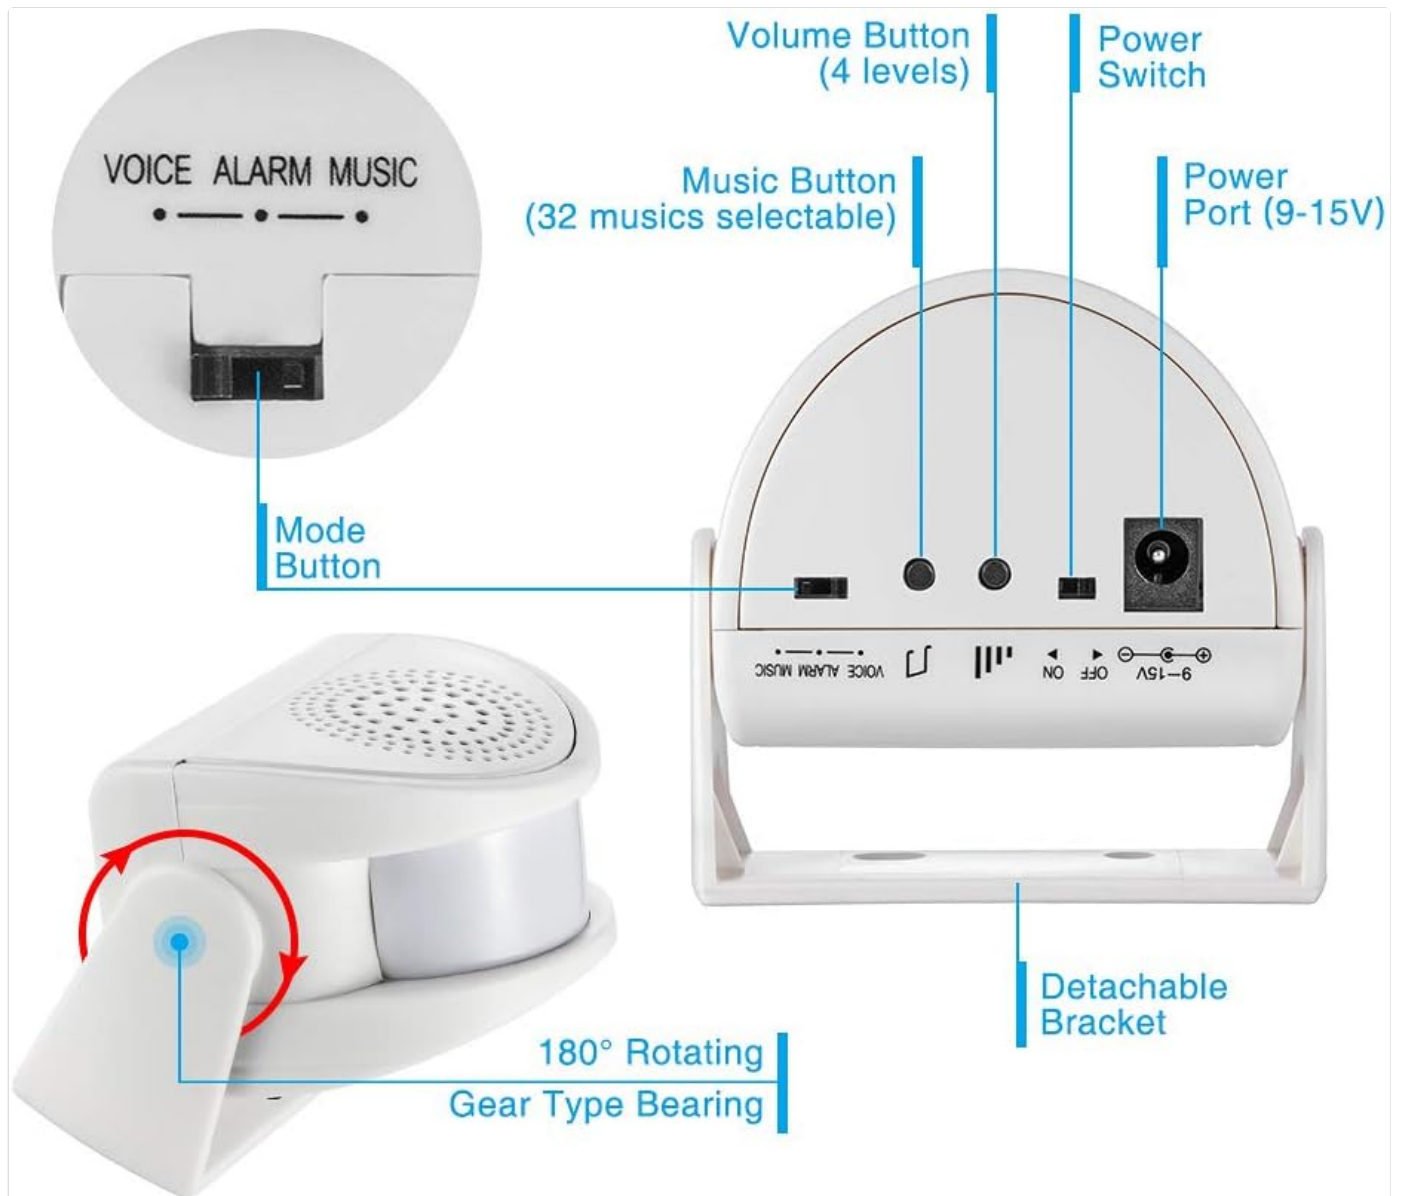

The horizontal detection angle is 110 degree while vertical detection angle is 15
 Detection distance: 2-6 meters in open area
 Come with 2 screws and double-face tape, you can mount it as you like

Image: Detailed view of the KERUI M5 unit's controls and adjustable bracket.

WIDE DETECTION RANGE



Image: Visual representation of the 110° horizontal and 15° vertical detection angles.

OPERATING INSTRUCTIONS

The KERUI M5 offers three operational modes and adjustable settings:

- **Power Switch:** Locate the power switch on the unit and slide it to the "ON" position to activate the device.
- **Mode Selection:** Use the "Mode" button to cycle through the available modes:
 - **Voice Mode:** Plays a greeting such as "Hello, welcome" upon motion detection. Ideal for business entrances.
 - **Alarm Mode:** Emits a continuous alarm sound for approximately 15 seconds when motion is detected. Suitable for security alerts.
 - **Music Mode:** Plays a selected melody upon motion detection. Offers 32 selectable tunes.
- **Volume Adjustment:** Use the "Volume" button to select one of four available volume levels. Note that volume cannot be adjusted in Alarm Mode.
- **Music Selection:** In Music Mode, use the "Music" button to browse and select from 32 different melodies.

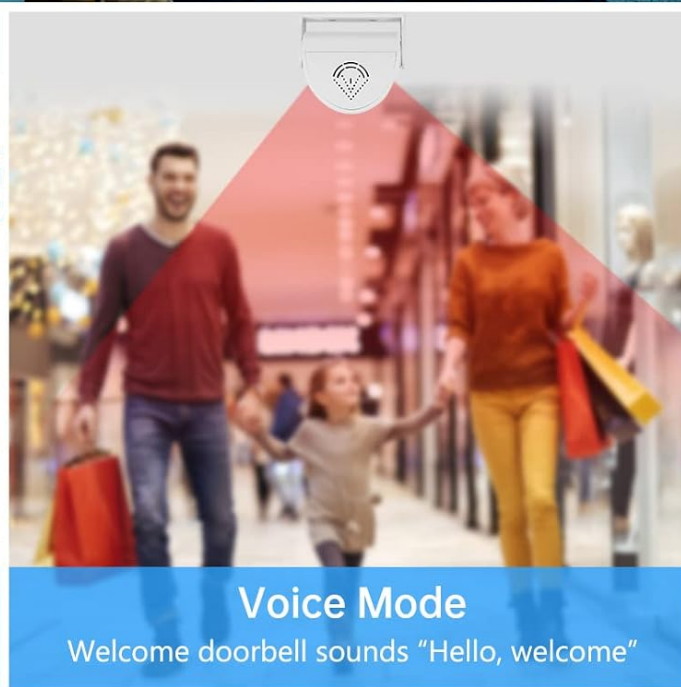
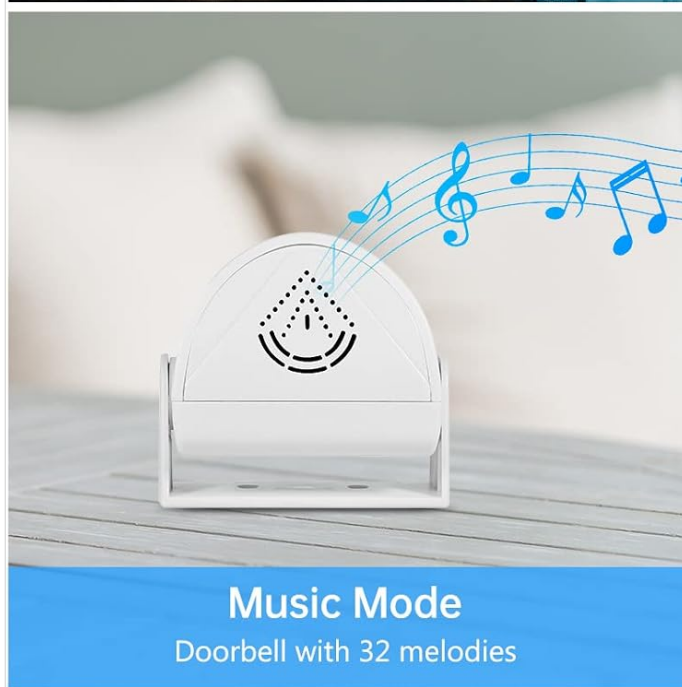


Image: Examples of the doorbell operating in Voice, Alarm, and Music modes.

Official Product Video: M5 Instruction

Your browser does not support the video tag.

This video provides a visual guide on how to set up and operate the KERUI M5 Wireless Motion Sensor Doorbell, including mode selection, volume adjustment, and battery installation.

SPECIFICATIONS

Feature	Detail
Brand	KERUI
Model	M5
Color	White

Power Source	Battery Powered (3 AAA, not included) or 9-15V Power Adapter (included)
Detection Distance	2-6 meters (Maximum Range: 8 Meters)
Detection Angle	110° Horizontal, 15° Vertical
Volume Levels	4 levels adjustable
Melodies	32 selectable songs (in Music Mode)
Rotation	180° adjustable angle
Item Weight	5 Ounces
Product Dimensions	3.15"D x 1.97"W x 2.95"H
Mounting Type	Wall Mount

MAINTENANCE

- **Battery Replacement:** If using batteries, replace them when the unit's performance declines. Ensure to use good quality AAA batteries and insert them correctly.
- **Cleaning:** Wipe the unit with a soft, dry cloth. Avoid using harsh chemicals or abrasive cleaners.
- **Placement:** This device is for indoor use only and is not weather-proof. Avoid installing it in direct sunlight, rain, areas with strong magnetic interference, or extreme temperatures.

TROUBLESHOOTING

If you encounter issues with your KERUI M5 doorbell, consider the following:

- **False Alarms:** Check for environmental interference around the chime alarm. Try adjusting the installation place or the detection angle to minimize unwanted triggers.
- **Unit Stops Working:** If the chime alarm ceases operation, first replace the batteries or switch to using the AC adapter to ensure a stable power supply.
- **Settings Reset:** Avoid forcibly switching off the unit or cutting power while it is playing a voice, alarm, or music, or before the blue light stops flashing. Doing so may reset all settings.
- **Professional Repair:** Non-professional workers should not attempt repairs without authorization.

WARRANTY AND SUPPORT

The KERUI M5 Wireless Motion Sensor Doorbell comes with a 12-month warranty. For technical support or customer service, please contact us via Amazon email. We aim to provide friendly and responsive assistance within 24 hours.