

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [Winplus](#) /

› [Winplus LM56123-6 Control & Motion Activated LED Ceiling Light with Remote Manual](#)

Winplus LM56123-6

Winplus LM56123-6 Control & Motion Activated LED Ceiling Light

Instruction Manual

[Safety Information](#)

[Package Contents](#)

[Setup](#)

[Operation](#)

[Maintenance](#)

[Troubleshooting](#)

[Specifications](#)

[Warranty & Support](#)

INTRODUCTION

This manual provides detailed instructions for the installation, operation, and maintenance of your Winplus LM56123-6 Control & Motion Activated LED Ceiling Light. This motion-activated light automatically turns on when movement is detected and remains on for a preset duration. The included remote control allows for convenient adjustment of lighting settings to suit various preferences and environments.

SAFETY INFORMATION

WARNING: Risk of Electric Shock. Disconnect power at the circuit breaker before installation or servicing.

- Read all instructions carefully before installation and use.
- Ensure the power supply is disconnected before performing any installation, maintenance, or cleaning.
- Installation should be performed by a qualified electrician if you are not familiar with electrical wiring.
- Do not attempt to modify the product. Any modifications may void the warranty and pose safety risks.
- This product is designed for indoor use unless otherwise specified.

PACKAGE CONTENTS

Verify that all components are present before beginning installation:

- 1 x LED Ceiling Light
- 1 x Crossbar
- 1 x Remote Control
- 2 x AAA Batteries (for remote control)

- 3 x Wire Nuts

SETUP AND INSTALLATION

The Winplus LM56123-6 LED Ceiling Light requires hardwire installation to an existing junction box. Follow these steps for proper setup:

1. **Power Disconnection:** Turn off power at the circuit breaker before starting installation.
2. **Mounting the Crossbar:** Secure the provided crossbar to your existing junction box using appropriate screws (not included, typically come with the junction box).
3. **Wiring Connections:** Connect the ceiling light's wires to your household wiring using the included wire nuts. Typically, this involves connecting live to live, neutral to neutral, and ground to ground. Ensure all connections are secure.
4. **Attaching the Light Fixture:** Carefully align the ceiling light with the mounted crossbar and secure it in place.
5. **Remote Control Batteries:** Open the battery compartment on the back of the remote control and insert the 2 AAA batteries, observing correct polarity.
6. **Power Restoration:** Once installation is complete and all connections are secure, restore power at the circuit breaker.





Image: Overview of the Winplus LM56123-6 LED Ceiling Light and its components, illustrating the design and basic mounting hardware.



Image: Product packaging displaying key features such as adjustable color temperature, brightness, ambient light sensor, motion sensor, and auto shut-off timer.

OPERATING INSTRUCTIONS

The Winplus LM56123-6 LED Ceiling Light is controlled via the included remote. Familiarize yourself with the remote's functions:

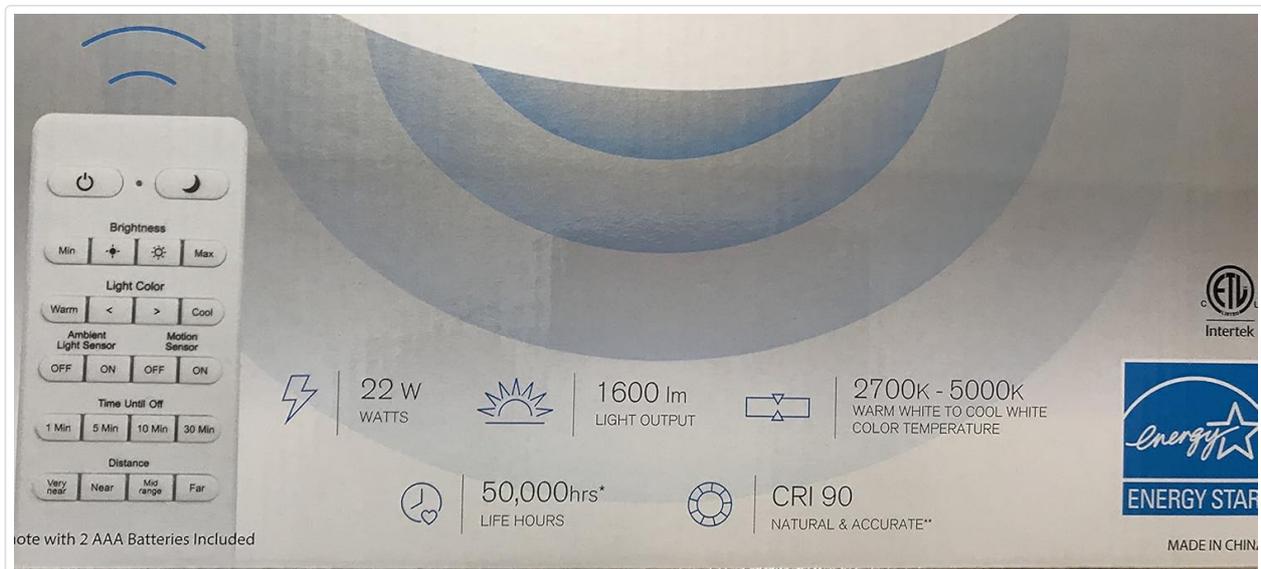


Image: Detailed view of the Winplus remote control, showing buttons for power, brightness, light color, ambient light sensor, motion sensor, time until off, and motion detection distance.

- **Power Button (⏻):** Turns the light ON or OFF.
- **Night Mode Button (☾):** Dims the light to 10% brightness and warm white color temperature.
- **Brightness Adjustment (Min / + / - / Max):** Adjusts the light intensity from minimum to maximum.
- **Light Color Adjustment (Warm / < / > / Cool):** Changes the color temperature from warm white (2700K) to cool white (5000K).
- **Ambient Light Sensor (OFF / ON):** When ON, the light will only activate in low-light conditions. When OFF, the light will activate regardless of ambient light levels.
- **Motion Sensor (OFF / ON):** When ON, the light will activate upon detecting motion. When OFF, the light functions as a standard ceiling light without motion activation.
- **Time Until Off (1 Min / 5 Min / 10 Min / 30 Min):** Sets the duration the light remains on after motion is no longer detected.
- **Distance (Very Near / Near / Mid Range / Far):** Adjusts the sensitivity and range of the motion sensor.

Your browser does not support the video tag.

Video: Demonstration of the Winplus LM56123-6 LED Ceiling Light's motion activation, adjustable warm and cool white light settings, and remote control functions.

MAINTENANCE

The Winplus LM56123-6 LED Ceiling Light requires minimal maintenance.

- **Cleaning:** Ensure the power is off before cleaning. Wipe the fixture with a soft, dry cloth. Do not use abrasive cleaners or solvents, as they may damage the finish or electrical components.
- **LEDs:** The integrated LED light source is designed for long life (up to 50,000 hours) and is not user-replaceable.
- **Remote Control:** Replace AAA batteries in the remote control when its functionality diminishes.

TROUBLESHOOTING

If you encounter issues with your Winplus LED Ceiling Light, refer to the following common solutions:

| Problem | Possible Cause | Solution |
|---------|----------------|----------|
|---------|----------------|----------|

| Problem | Possible Cause | Solution |
|---------------------------------------------|------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| Light does not turn on. | No power, loose wiring, remote control batteries dead. | Check circuit breaker. Verify wiring connections. Replace remote control batteries. |
| Motion sensor not activating light. | Motion sensor OFF, Ambient light sensor ON (in bright conditions), incorrect distance setting. | Ensure Motion Sensor is ON. Turn Ambient Light Sensor OFF if activation is desired in bright conditions. Adjust Distance setting to 'Far'. |
| Light stays on too long or not long enough. | Incorrect 'Time Until Off' setting. | Adjust 'Time Until Off' setting on the remote control to your desired duration (1, 5, 10, or 30 minutes). |
| Light is too dim or too bright. | Brightness setting incorrect. | Use the Brightness buttons (Min, +, -, Max) on the remote to adjust to the desired level. |
| Light color is not desired. | Light Color setting incorrect. | Use the Light Color buttons (Warm, <, >, Cool) on the remote to adjust the color temperature. |

SPECIFICATIONS

Key technical details for the Winplus LM56123-6 LED Ceiling Light:

- **Model Number:** LM56123-6
- **Brand:** Winplus
- **Power Source:** AC
- **Voltage:** 120 Volts
- **Wattage:** 22 Watts
- **Light Output:** 1600 Lumens (Maximum)
- **Color Temperature:** 2700K (Warm White) - 5000K (Cool White)
- **Color Rendering Index (CRI):** 90
- **Light Source Type:** LED
- **Control Method:** Remote Control (Infrared)
- **Special Features:** Motion Sensing Technology, Adjustable Color, Adjustable Brightness, Ambient Light Sensor, Timer for Auto Shut-Off
- **Material:** Aluminum
- **Finish Type:** Painted
- **Product Dimensions:** 6.1"L x 5.5"W x 12.5"H
- **Item Weight:** 3.35 pounds
- **Installation Type:** Ceiling Mount
- **Batteries Required (Remote):** 2 AAA batteries
- **Energy Efficiency:** Energy Star Certified
- **Life Hours:** 50,000 hours*

*Approximate lifespan under normal operating conditions.



Image: Product packaging highlighting technical specifications such as wattage, light output, color temperature range, CRI, and Energy Star certification.

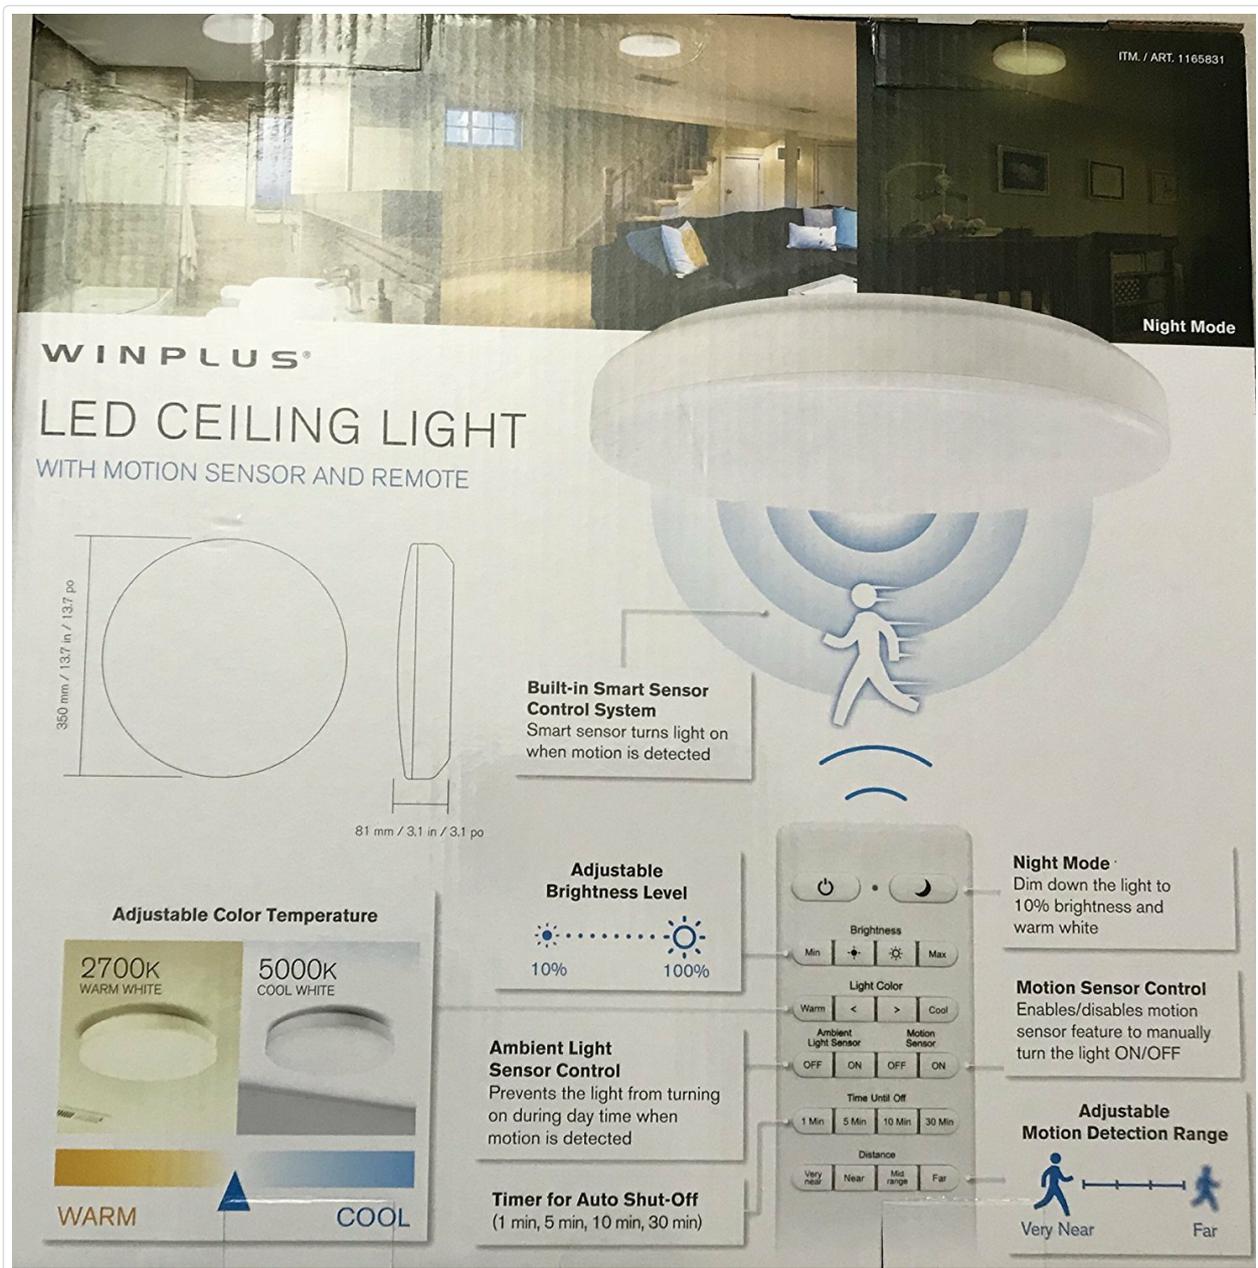


Image: Explanation of Color Rendering Index (CRI), demonstrating how CRI 90 shows object colors more naturally and clearly compared to lower CRI values.

WARRANTY & SUPPORT

Warranty: This Winplus product is covered by a 1-year manufacturer's warranty from the date of purchase. This warranty covers defects in materials and workmanship under normal use. It does not cover damage resulting from misuse, accidents, unauthorized modifications, or improper installation.

Support: For technical assistance, troubleshooting beyond this manual, or warranty claims, please contact Winplus customer support. Refer to the product packaging or the official Winplus website for the most current contact information.