

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

> [Command](#) /

> [Command Utility Hooks \(Model 17001-VP-6PK\) Instruction Manual](#)

Command 17001-VP-6PK

Command Utility Hooks (Model 17001-VP-6PK) Instruction Manual

Damage-Free Hanging Solution

1. PRODUCT OVERVIEW

The Command Utility Hooks Value Pack provides a damage-free solution for organizing your space. These medium-sized hooks are designed to hold strongly on various indoor surfaces and remove cleanly without leaving holes, marks, or sticky residue. Each hook can hold up to 3 pounds (1.3 kg), making them suitable for a wide range of items.

What's Included:

- 6 x Command Utility Hooks (Medium, White)
- 12 x Command Medium Indoor Strips

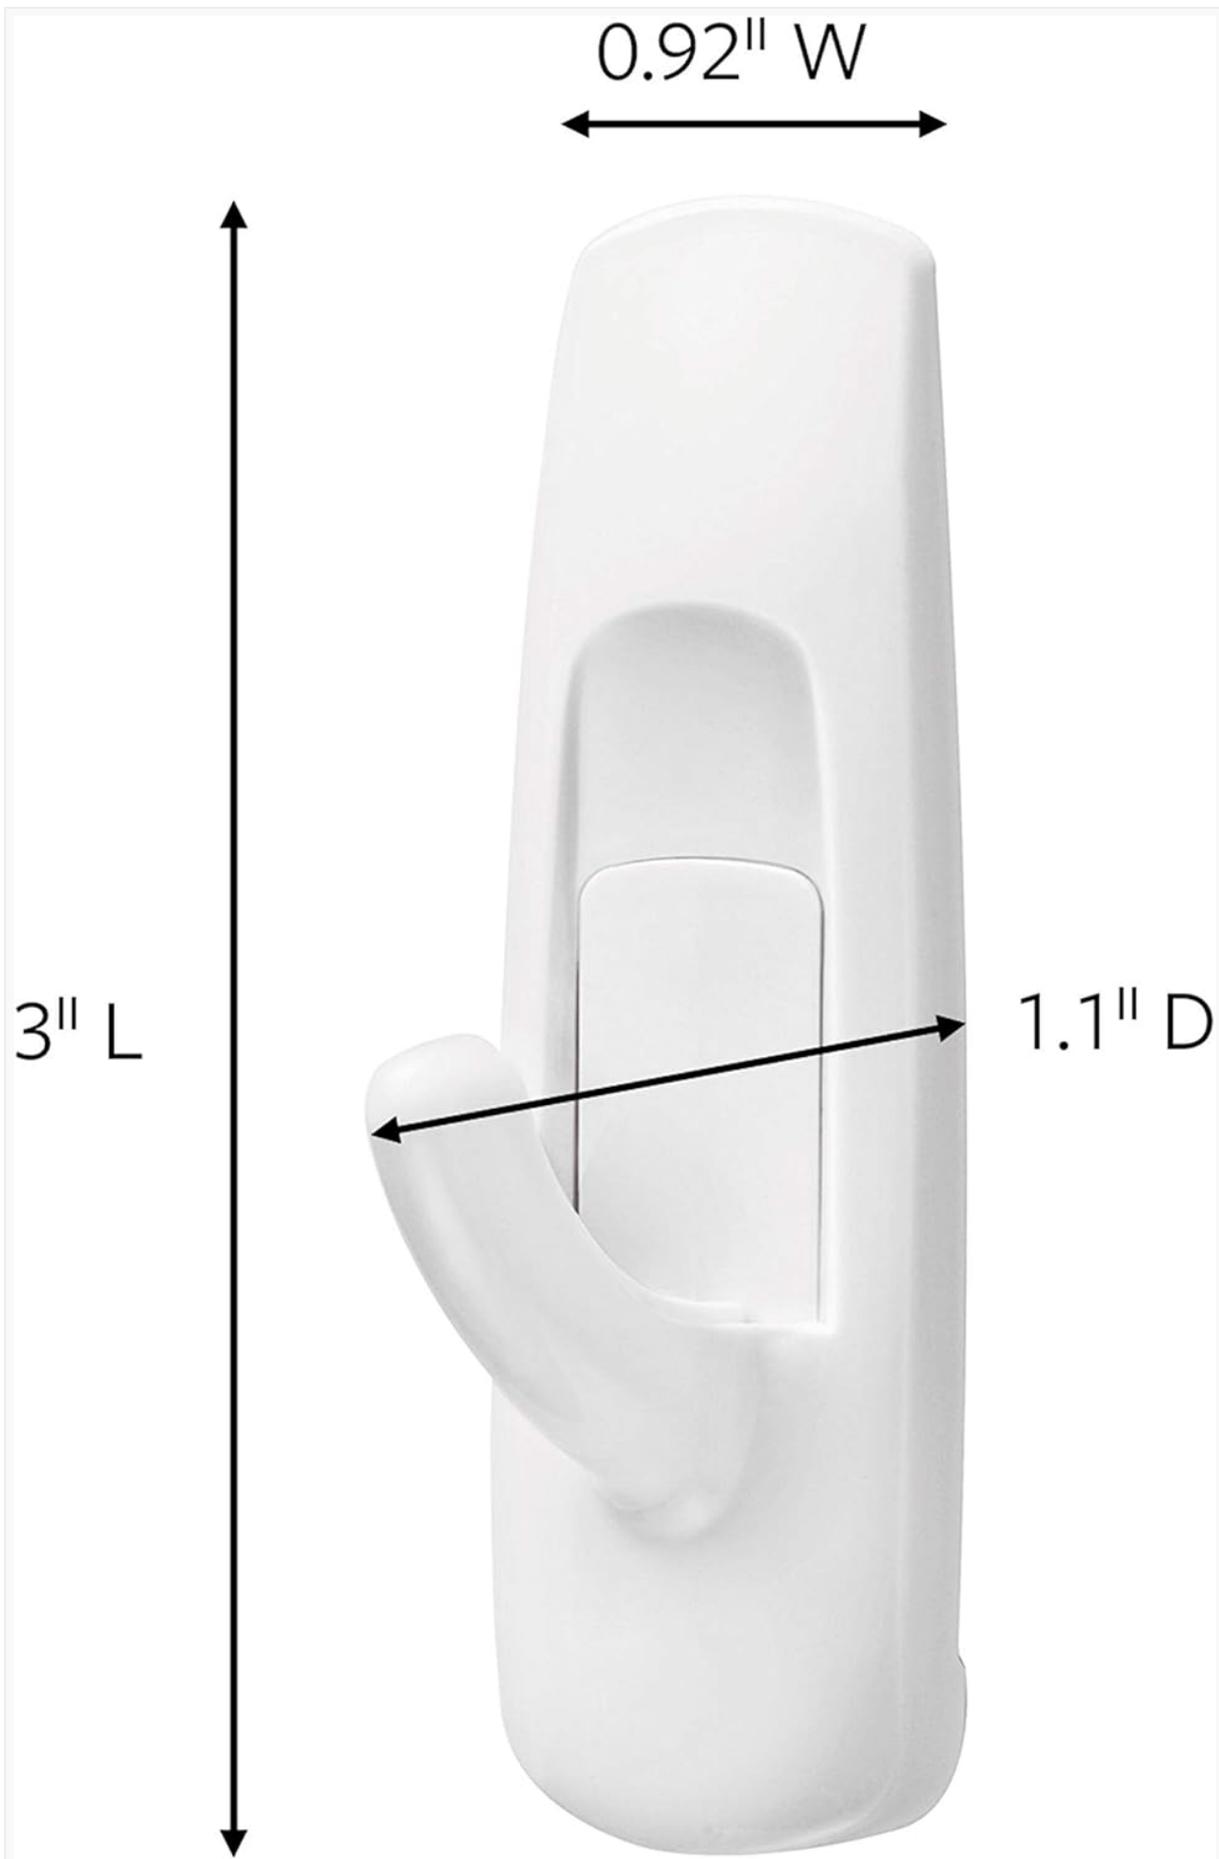


Figure 1: Product Dimensions. The hook measures approximately 3 inches in length, 0.92 inches in width, and 1.1 inches in depth.

2. IMPORTANT SAFETY INFORMATION

- **Temperature Range:** For optimal performance, use indoor Command Hooks between 50°F (10°C) and 105°F

(37°C).

- **Weight Limit:** Do not exceed the stated weight limit of 3 lbs (1.3 kg) per hook. Overloading can cause the hook to detach.
- **Surface Restrictions:** Do not apply hooks to wallpaper, textured surfaces, fabrics, or brick. These surfaces may not provide adequate adhesion or may be damaged upon removal.
- **Avoid Hanging Valuable Items:** Do not hang valuable, irreplaceable, or fragile items where damage could occur if the hook detaches.
- **Placement:** Do not hang hooks directly over beds or in areas where falling objects could cause injury.
- **Framed Pictures:** Do not use utility hooks for hanging framed pictures. Use Command Picture Hanging Strips specifically designed for this purpose.



Figure 2: Important Safety Reminder. Do not use Command Utility Hooks for framed pictures; use specialized Command Picture Hanging Strips instead.

Damage-Free Hanging Surfaces

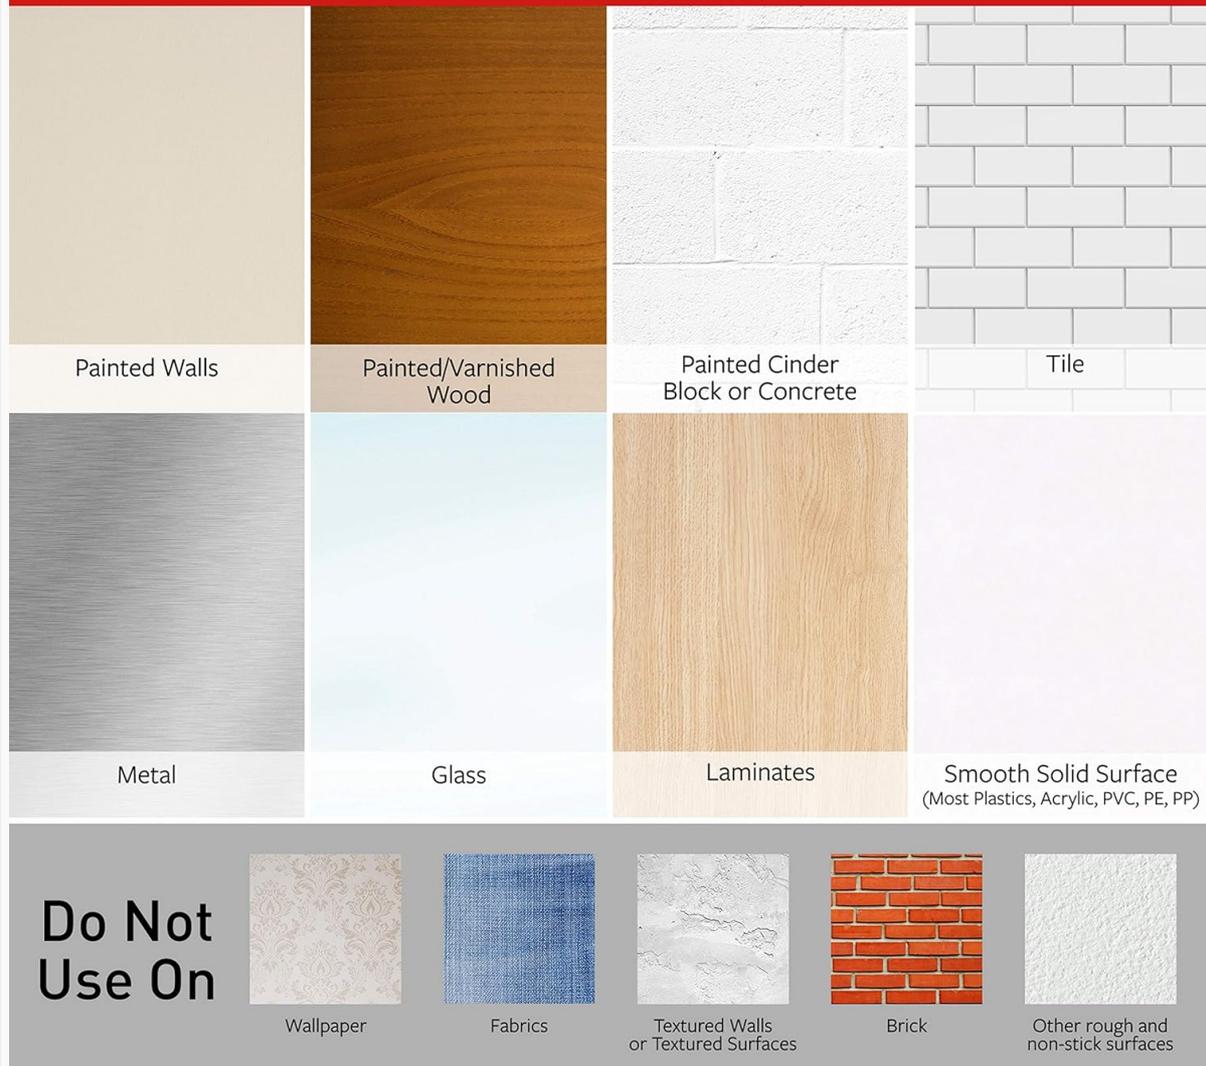


Figure 3: Damage-Free Hanging Surfaces. This diagram illustrates recommended surfaces like painted walls, finished wood, glass, tile, and metal, and surfaces to avoid such as wallpaper and textured walls.

3. SETUP AND INSTALLATION

Follow these steps carefully to ensure proper adhesion and damage-free removal.

Preparation:

1. **Clean the Surface:** Wipe the desired surface with rubbing alcohol. Do not use household cleaners or water, as they can leave a slippery residue that prevents proper adhesion. Allow the surface to dry completely.
2. **Painted Walls:** If the wall has been freshly painted, wait at least 7 days for the paint to cure before applying Command Hooks.

Application Steps:

1. **Separate Strips:** Carefully separate the Command Strips from each other.
2. **Attach Strip to Hook:** Remove the red liner from one side of a Command Strip. Press the adhesive side firmly onto the back of the hook. Ensure the pull tab extends slightly below the hook.
3. **Position Hook:** Remove the black liner from the exposed side of the strip. Position the hook on the desired clean, dry surface.
4. **Press Firmly:** Press the hook firmly against the wall for 30 seconds. Ensure even pressure across the entire adhesive area.

5. **Reinforce (for two-piece hooks):** If your hook is a two-piece design (where the hook detaches from the base), slide the hook upwards off its mounting base. Press the base firmly against the wall for another 30 seconds.
6. **Wait:** For optimal adhesion, wait 1 hour before hanging any items on the hook. This allows the adhesive to fully bond with the surface.
7. **Reattach Hook (for two-piece hooks):** After waiting 1 hour, slide the hook back onto its mounting base.

Failure to follow instructions carefully may cause damage. Save instructions or visit command.com

Si no sigue las instrucciones pueden producirse daños. Guarde las instrucciones o visite command.com




17001ES
command.com

APPLY APLICAR




1
Clean surface with rubbing alcohol. Do not use household cleaners.
Limpie la superficie con alcohol isopropil. No utilice limpiadores de uso doméstico.




2
Remove red liner. Press adhesive to hook.
Retire el protector rojo. Presione el adhesivo en el gancho.




3
Remove black liner. Press to wall for 10 seconds.
Retire el protector negro. Presione a la pared por 10 segundos.

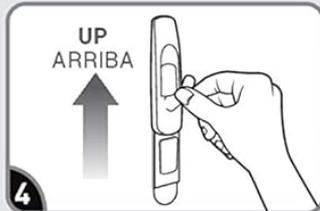

4
To ensure adhesive hold, slide hook up and off.
Para garantizar la sujeción adhesiva, deslice el gancho hacia arriba para sacarlo.

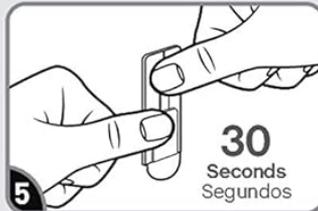


5
Press base firmly for 30 seconds.
Presione la base firmemente por 30 segundos.

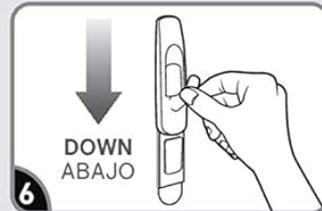


6
Slide hook back on. Wait 1 hour before use.
Coloque el gancho de nuevo, deslizándolo hacia abajo. Espere 1 hora antes de usar.

REMOVE RETIRAR

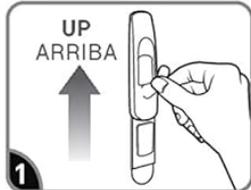


1
Slide hook up and off.
Deslice el gancho hacia arriba para sacarlo.



2
Gently hold mounting base in place.
Sostenga la base de montaje en su lugar.



3
Never pull the strip towards you! Always pull straight down.
¡Nunca jale la tira hacia usted! Siempre jale directamente hacia abajo.



4
Stretch the strip slowly against the wall at least 12 inches to release.
Estire la tira lentamente contra la pared por lo menos 30 cm para soltar.

Hooks can be reused with Command® Medium Refill Strips.

Los ganchos se pueden volver a usar con las tiras medianas de repuesto Command®.

▲ CAUTION: Do not hang over beds or on wallpaper. Do not hang valuable or irreplaceable items or framed pictures. Use indoors 50°-105°F.

Limited Warranty and Limitation of Liability (for product sold in USA): This product will be free from manufacturing defects. If defective, your exclusive remedy shall be, at 3M's option, product replacement or refund. 3M will not be liable for any loss or damage arising from this product, whether direct, indirect, special, incidental or consequential.

▲ PRECAUCIÓN: No cuelgue sobre camas o utilice en papel tapiz. No cuelgue artículos valiosos o irremplazables o imágenes con marco. Use en interiores 10° a 40°C

Garantía limitada y límite de responsabilidad (para producto vendido en E.U.A.): Este producto no tendrá defectos de fabricación. Si tiene defectos, su única solución será, a opción de 3M, el reemplazo del producto o el reembolso del precio de compra. 3M no será responsable de ninguna pérdida o daño que se deriven de este producto, ya sea directos, indirectos, especiales, fortuitos o resultantes.

Figure 4: Detailed Application Instructions. This diagram visually guides you through each step of applying the Command Utility Hook.

Video 1: Command Hook Application. This official video demonstrates the correct procedure for applying Command Hooks to various surfaces, ensuring a secure hold.

4. OPERATING INSTRUCTIONS

Once installed and the adhesive has bonded for at least one hour, your Command Utility Hooks are ready for use. They are ideal for hanging a variety of lightweight items up to 3 lbs (1.3 kg).

Recommended Uses:

- Hanging clipboards, small tools, or office supplies.
- Organizing kitchen utensils, dish towels, or oven mitts.
- Storing dog leashes, keys, or small bags.
- Creating temporary decorations or displays.

3M
Command
BRAND
Do. No Harm.

APRIL/MAY BOOK PROJECT

Each student should choose a BIOGRAPHY/AUTOBIOGRAPHY for this project. The book **MUST** be approved by Mrs. Shanley by **Friday, April 11th**.

Each student must read his or her book during the month of April. It would also be helpful to read this book as part of the daily reading homework.

The project is to create a trading card (on a full-sized sheet of cardstock) on the person whose life you read all about!! On the front of the "card" will be a picture of the person (you may either draw it or you can print it from the Internet!). On the back of the "card" should be at least 8 facts about the person's life. Some facts you may choose to include are:

- When was he/she born?
- Where did he/she live?
- What is this person famous for?
- What was an important event in this person's life?
- What was this person's early life like?
- Any other interesting facts about this person!!!

Please write your facts in **complete sentences**. You may choose to type these facts on the computer or **use your best handwriting**. The project is due **Wednesday, May 7th**.

Project Guidelines:

- **Week 1:** Choose a biography/autobiography to read.
- **Weeks 2-3:** Read your book!!!
- **Week 4:** Get a piece of cardstock from Mrs. Shanley for your project.
- **Week 5:** Finish and present your project to the class!

3 lb

HOLDS STRONGLY
Medium Utility Hooks

Figure 5: Strong Hold. A Command Utility Hook securely holding a clipboard, illustrating its capacity for organizing various items.

How much does your item weigh?

1 lb.



3 lbs.



5 lbs.



8 lbs.



COMMAND™ WEIGHT REFERENCE GUIDE

Figure 6: Weight Reference Guide. This guide helps users estimate the weight of items to ensure they do not exceed the hook's 3 lb capacity.

5. REMOVAL INSTRUCTIONS

To remove the Command Utility Hook cleanly and without damaging your surface, follow these steps:

1. **Remove Item:** Take any item off the hook.
2. **Slide Hook Up:** If your hook is a two-piece design, slide the hook upwards off its mounting base.
3. **Gently Hold Base:** Gently hold the top of the mounting base against the wall. Do not press the base into the wall.
4. **Pull Straight Down:** Slowly pull the exposed tab of the adhesive strip straight down, parallel to the wall. Stretch the strip at least 12 inches until the hook releases from the wall. Do not pull the strip towards you or at an angle, as this can damage the surface.

COMMAND™ HOOKS INSTRUCTIONS FOR USE

EASY OFF



1
SLIDE HOOK UP.



2
GENTLY HOLD
MOUNTING BASE.
STRETCH the strip.



3
PULL Tab
STRAIGHT DOWN.



X

Never pull the strip towards you.
Always pull straight down as slow as you can.

Figure 7: Detailed Removal Instructions. This diagram visually guides you through the correct method for removing Command Utility Hooks to prevent surface damage.

6. MAINTENANCE

Command Utility Hooks require minimal maintenance. To ensure continued performance:

- **Re-adhesion:** If a hook needs to be moved or re-applied, always use a new Command Replacement Strip. Do not reuse old strips, as their adhesive properties will be compromised.
- **Cleaning:** The plastic hooks can be wiped clean with a damp cloth if they become dirty. Ensure they are dry before re-applying to a surface.

7. TROUBLESHOOTING

Common Issues and Solutions:

Problem	Possible Cause	Solution
---------	----------------	----------

Problem	Possible Cause	Solution
Hook falls off wall	<ul style="list-style-type: none"> Surface not cleaned with rubbing alcohol. Surface not dry before application. Not pressed firmly for 30 seconds. Did not wait 1 hour before hanging items. Exceeded weight limit. Applied to unsuitable surface (e.g., wallpaper). 	<ul style="list-style-type: none"> Ensure proper surface preparation. Re-apply with a new strip, following all instructions. Reduce weight of item being hung.
Sticky residue left after removal	<ul style="list-style-type: none"> Strip pulled at an angle or towards you. Strip not stretched at least 12 inches. 	<ul style="list-style-type: none"> Always pull the strip straight down, parallel to the wall, stretching it slowly.
Surface damage upon removal	<ul style="list-style-type: none"> Applied to unsuitable surface (e.g., wallpaper, textured walls). Strip pulled incorrectly. 	<ul style="list-style-type: none"> Ensure application only on recommended surfaces. Follow removal instructions precisely.

8. SPECIFICATIONS

Feature	Detail
Brand	Command (3M)
Model Number	17001-VP-6PK
Material	Plastic
Color	White
Mounting Type	Wall Mount (Self-Adhesive)
Weight Limit	3 lbs (1.3 Kilograms) per hook
Number of Hooks	6
Product Dimensions (L x W x H)	1.97 x 4.3 x 6.32 inches (packaging)
Recommended Surfaces	Painted walls, Tiles, Metal, Wood, Glass, Smooth solid surfaces
Temperature Range (Indoor)	50-105 Degrees Fahrenheit (10-37 Degrees Celsius)
Special Feature	Removable, Damage-Free

9. WARRANTY AND SUPPORT

For detailed warranty information, product support, or to purchase replacement strips, please visit the official Command brand website or contact 3M customer service. Keep your purchase receipt for any warranty claims.

Manufacturer: Command (3M)