

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

- › [XIHADA](#) /
- › [XIHADA Universal Garage Door Remote ML999-11 Instruction Manual](#)

## XIHADA ML999-11

# XIHADA Universal Garage Door Remote ML999-11 Instruction Manual

Multi-Frequency Duplicator for Garage and Gate Openers

[Overview](#)

[Compatibility](#)

[Setup & Programming  
Specifications](#)

[Operation  
Support](#)

[Maintenance](#)

[Troubleshooting](#)

## 1. PRODUCT OVERVIEW

---

The XIHADA Universal Garage Door Remote ML999-11 is a multi-frequency duplicator designed to clone existing garage door and gate opener remotes. It supports a wide range of frequencies from 280MHz to 868MHz, allowing it to replace many major brands' remotes. This compact device features four programmable buttons for controlling up to four different devices.



Image: Front view of the XIHADA Universal Garage Door Remote ML999-11, showing its four buttons.



Image: Close-up view of the XIHADA remote, indicating the four programmable buttons (Key 1, Key 2, Key 3, Key 4).

## Package Contents:

- 1 x XIHADA Universal Garage Door Remote ML999-11 (with CR2032 battery pre-installed)

## 2. COMPATIBILITY INFORMATION

---

This universal remote is compatible with a wide range of fixed code and rolling code remotes operating within the frequency ranges of 280MHz-350MHz, 380MHz-450MHz, and 867MHz-868MHz. It is crucial to verify compatibility with your existing remote before attempting to program.

### Compatible Brands and Models:

Refer to the detailed compatibility chart below to confirm if your original remote's brand and model are supported. Your original remote must be present and functional for programming.

**The duplicator for copy rolling code remote**

Brand	model	Brand	model
ACM	TX2, TX2 COLOR, TX4	LABEL	SPYCO
ADYX	TE4433H BLUE, 433-HG BRAVO	LIFE	FIDO
AERF	COMPACT, HY-DOM, MERCURI B, MERCURI C, ABUTON, MARS, SATURN, ST3/N, TERRA, TMP-1, TMP-2, UNITECH	LINEAR	MCT-11, ACT-21, ACT-22, STING RAY ACT-31, STING RAY ACT-34B
ALLMATIC	BROWN, BROWN RED, BRO.OVER, PASS, MINIPASS, TECH3	MERLIN	2.0 E945M, E943M, E940M MERLIN/PROLIFT C945, C940, C943, M842, M844
APERIO	GO, GO PRO, GO MINI APERTO (Sommer) 4020-TX03-434, TX02-434-2, TX02-868-2	MHOUSE	TX3, TX4, GTX4
APRIMATIC	TR, TM4, TXM	MOOVO	MT4G
ATA	PTX4 BLU, PTX4 PINK	NICE	SMILO, FLOR-S, VERY-VR, FLOR-S ERA . ONE (ON), ON ERA, INTI, ERGO, PLANO, ONE (ON FM)
AVIDSEN	104251, 104250, 104250 OLD, 104250 RED, 104257, 104350, 654250 BALLAN FM400, FM400E	NORTON	NEO, TXCD GO NORTON, GO MINI NORTON
BENINCA	TO. GO. WV, TWV, ROLLKEY, APPLE, LOT WCV, CUPIDO, TO.GO. QV,IO	NOVOFERM	MCHS, MICRO-NOVOTRON 502, MINI-NOVOTRON 504, MICRO-NOVOTRON 502, MICRO-NOVOTRON 504, MICRO- NOVOTRON 31, MICRO-NOVOTRON 51, MINI-NOVOTRON 30, MINI-NOVOTRON 50, MNHS
BFT	MITTO, MITTO M, MITTO RCB, MITTO A, TRC, GHIBLI, MURALE, KLEIO	O&O	TX, T.COM R4-2, T.COM R8-2, TWIN, TX (NEO)
CARDIN	TRQ S449, TRQ S449 GREEN (PRECODE), TXQ S449, TXQ S449 GREEN, TRQ S486, TXQ S486, S437 TX, XRADO	PECCININ	TX MENBRANA
CASALI	JA33 AMIGO GENIUS/CASALI A252RC	PRASTEL	MTE, MPSTLE, MPSTP2E, TCE, BFOR, TRQ-P, SLIM-E
CHAMBERLAIN/ LIFT MASTER/ MOTOR LIFT	953ESTD, 371 LM, 971LM, 84330E, 94334CE, 94333E/94334E/94335E, 9747E, 1A5639-7, 1A5477, 1A6487, 132B2372, 94330EML/9333EML/94335EML, 84330EML/84333EML/84335EML, 8747EML	PUJOL	TWIN, VARIO, VARIO MARS, VARIO OCEAN, NEO
CLEMSA	MUTANCODE, T, T-8, E-CODE N MASTERCODE MV	RIB	LITHIO
DASPI	ZERO RC	ROPER	NEO ,GO ROPER, GO MINI ROPER\ SABUTOM BROOVER, BROSTAR
DEA	SYSTEM PUNTO 278, GOLDR, GENIE R 273	SEA	HEAD, SMART DUAL ROLL, SMART-3 ROLLING CODE, COCCINELLA ROLL
DITEC	BIXLP, GOL4, BIXLG	SEAV	BE HAPPY RS
DOORHAN	TRANSMITTER 4	SECULUX	NEO
DOORMATIC	MILENY, MILENY-EVO	SILVELOX	Mhz 2007, QUARZ SAW
ECOSTAR	RSC, RSE, RSZ	SIMINOR	CVXNL, MITTO ,SIM433
ERREKA	IRIS, ROLLER 2, ROLLER 433, ROLLER 868, SOL433, SOL868, VEGA 433, VEGA 868	SOMFY	K-EASY, K-EASY NEW, K-EASY OLD, MITTO, KEY GO RTS, TELIS RTS, KEYTIS RTS, KEYTIS RTS NS, ALARMA
FAAC	TML 433SLH, DL 868 SLH, XT 868 SLH, XT 433 SLH, T 868 SLH, T 433 SLH, XT 868 SLH BLACK, XT 433 SLH BLACK,XT 433 RC, TE433HG, XT4 433 RCBE	SOMMER	4010, 4011, 4014 TX03-434-2, 4013 TX03-434-4, 4020 TX03-868- 4, 4026 TX03-868-2, 4022 TX02-434-2, 4025 TX02-868-2, 4031 TX08-868-4 .
FADINI	JUBI-SMALL, JUBI 433	STAGNOLI	KALLISTO, VENUS AV223
GENIE	GITR-3, GIT, GICT390, GIFT390-1, G3T-BX, G1T-BX, GM3T, GICTD, GIFTD	TAU	250K-SLIMRP, 250K-SLIMR, 250T-4RP
GENIUS	AMIGOLD, AMIGO, KILO BRAVO, ECHO	TELCOMA	FM400E, FM400
GIBIDI	AU1600, AU1600 WOOD, AU1680, AU1680 WOOD, DOMINO	TOR LIFT	TORMIT4
JCM	NEO, TWIN ,GO, GO PORTIS, GO NORTON, KBLUE ETH- TEL01	V2	TSC, TXC, TRC, HANDY, PHOENIX, PHOX 433
KEY	900TXB-42R, TXB 44R, SUB 44R .KING GATES CLIPPER, STYLO KLING KUA, KUA E, KUA S	VDS	ECO-R, TRQ P

Image: Detailed chart showing compatible brands and models for duplication with the XIHADA remote.

### Non-Compatible Brands and Models:

The XIHADA Universal Remote is **not compatible** with the following brands and models. Attempting to program with these systems will not be successful:

## Brands & Models Not Compatible with XIHADA

1	Chamberlain / Liftmaster Security 2.0 Garage Door Opener	2	Chamberlain / Liftmaster 2.0+ Garage Door Opener
3	Chamberlain Garage door Opener with MYQ System	4	Liftmaster Garage Door Opener with MYQ System
5	LiftMaster 8500W Garage Door Opener	6	Liftmaster 892 LT
7	LiftMaster 811 LMX	8	LiftMaster 893 LM
9	Chamberlain B 6713T Garage Door Opener	10	Chamberlain B 6753T Smart Garage Door Opener
11	Genie Pro Screw Drive	12	AccessMaster garage with MyQ
13	Door king System / DKS Gate Opener	14	Stanley
15	Condo's garage door opener	16	Ryobi
17	Softens Doors	18	Blue Sea
19	Allister	20	Amarr
21	Atoms	22	Merik
23	Lynx	24	Skylink
25	Wayne Dalton	26	Martin
27	Saco Gate Opener		

Image: Chart listing brands and models that are not compatible with the XIHADA Universal Remote.

- Liftmaster Security 2.0 garage opener
- Chamberlain MYQ garage opener
- LiftMaster 8500W garage Opener
- Liftmaster 892LT, 811LMX, 893LM
- Chamberlain B 6713T, B 6753T Smart Garage Opener
- Condo's garage door opener
- Ryobi, Softens Doors, Blue Sea, Allister, Amarr, Atoms, Doorking, Lynx, Merik, Stanley, Skylink, Wayne Dalton, Martin, SACO Gate Opener

### 3. SETUP AND PROGRAMMING

The XIHADA Universal Remote allows you to duplicate codes from your existing remote. You must have a working original remote to perform the duplication process.

## Duplication Process:

1. **Clear Existing Codes:** Hold down button 1 and press button 2 four times. Release both buttons. The LED on the universal remote will emit a quick flash every 2 seconds, indicating it's ready for programming.
2. **Position Remotes:** Place your original remote control directly in front of the XIHADA universal remote, approximately 2-3 cm apart.
3. **Copy Code:** Press and hold a button on your original remote. Simultaneously, press and hold the desired button on the XIHADA universal remote where you want to store the code. Continue holding both until the LED on the universal remote starts flashing quickly, then turns off. This indicates the code has been successfully copied.
4. **Duplicate Additional Buttons:** To copy a second, third, or fourth button, repeat steps 2 and 3 for each desired button.



Image: Illustration of positioning the original remote and the XIHADA remote for code duplication.

## Automatic Matching Code (Receiver Learning):

If the codes are copied from the original remote but the universal remote does not operate the garage door or gate, an additional step may be required to match the code with the receiver unit. This process typically involves activating the receiver's learning mode.

1. **Access Receiver:** Go to your garage door or gate opener's receiver unit.
2. **Activate Learning Mode:** Follow the instructions for your specific garage door or gate opener to put its receiver into learning mode (this often involves pressing a "Learn" or "Program" button on the receiver itself).
3. **Transmit Code:** While the receiver is in learning mode, press the button on your XIHADA universal remote that you wish to match. Hold the button until the receiver indicates successful learning (e.g., an LED flashes, a click is heard). The LED on the XIHADA remote may flash quickly and then turn off.

For a visual guide on the duplication process, you may refer to the following external resource [Duplication Process Video Guide](#)

## 4. OPERATION

---

Once programmed, the XIHADA Universal Remote operates like your original remote. Each button can control a different device (e.g., garage door, gate, alarm system) depending on how it was programmed.

### Using the Remote:

- Press the corresponding button (Key 1, Key 2, Key 3, or Key 4) to activate the linked device.
- Ensure you are within range of the receiver for proper operation.



Image: The XIHADA remote being used to open a garage door.

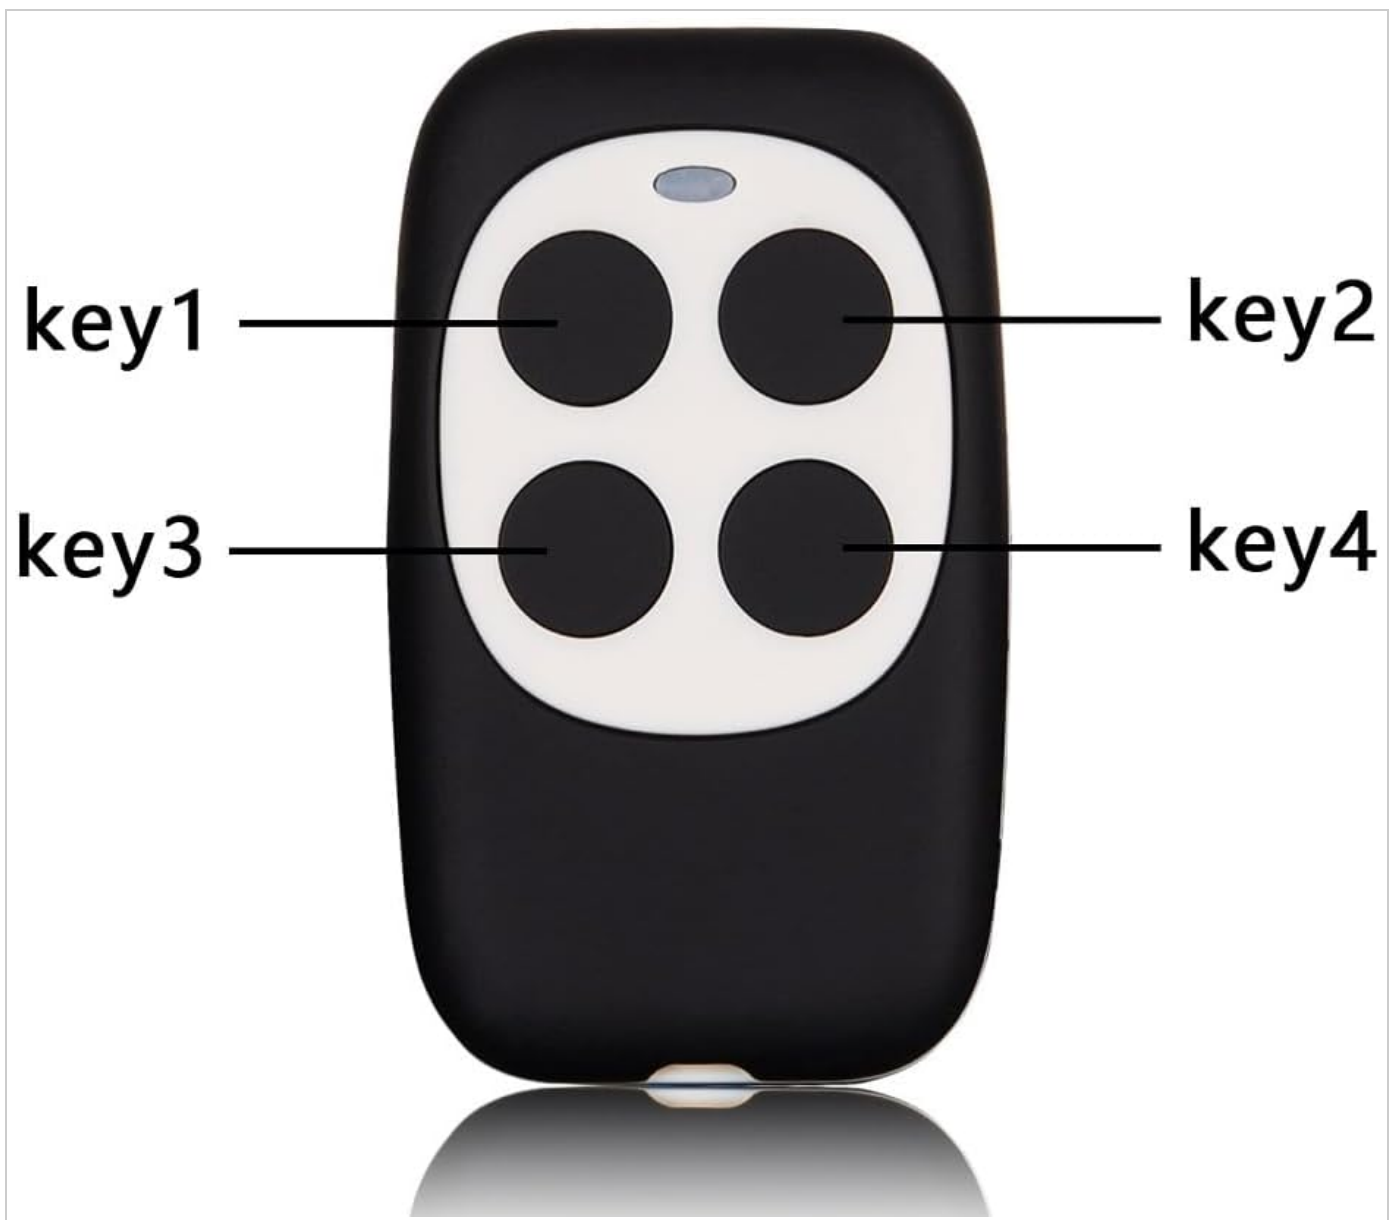


Image: The XIHADA remote being used to open an automatic gate.

## 5. MAINTENANCE

---

The XIHADA Universal Remote requires minimal maintenance. The primary maintenance task is battery replacement.

### **Battery Replacement:**

The remote uses a CR2032 lithium battery. When the remote's range decreases or the LED indicator becomes dim, it is time to replace the battery.

1. Carefully open the remote casing.
2. Remove the old CR2032 battery.
3. Insert a new CR2032 battery, ensuring correct polarity (+/-).
4. Close the remote casing securely.

No other user-serviceable parts are inside the remote.

## 6. TROUBLESHOOTING

---

If you encounter issues with your XIHADA Universal Remote, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Remote does not program.	<ul style="list-style-type: none"> <li>• Original remote not working or incompatible.</li> <li>• Incorrect programming steps.</li> <li>• Remote not cleared before programming.</li> <li>• Distance between remotes too far during duplication.</li> </ul>	<ul style="list-style-type: none"> <li>• Ensure original remote is functional and listed as compatible.</li> <li>• Review "Setup and Programming" section carefully.</li> <li>• Perform the "Clear Existing Codes" step.</li> <li>• Place remotes 2-3 cm apart during duplication.</li> </ul>
Remote programmed but does not open door/gate.	<ul style="list-style-type: none"> <li>• Code not successfully learned by the receiver.</li> <li>• Remote is out of range.</li> <li>• Low battery.</li> </ul>	<ul style="list-style-type: none"> <li>• Perform "Automatic Matching Code (Receiver Learning)" steps.</li> <li>• Ensure you are within operating range of the receiver.</li> <li>• Replace the CR2032 battery.</li> </ul>
LED indicator is dim or does not light up.	Low battery.	Replace the CR2032 battery.

If problems persist after following these steps, please contact customer support.

## 7. SPECIFICATIONS

Feature	Detail
Model Number	ML999-11
Dimensions	6.0 x 3.5 x 1.0 cm (2.36 x 1.38 x 0.39 inches)
Weight	18 g
Working Frequency Range	280MHz-350MHz / 380MHz-450MHz / 867MHz-868MHz
Battery Type	CR2032 Lithium (included)
Number of Buttons	4
Compatibility	Multi-frequency fixed code and rolling code remotes (refer to compatibility charts)
Use Environment	Outdoor



Image: Dimensions of the XIHADA Universal Garage Door Remote.

## 8. CUSTOMER SUPPORT

---

For further assistance, questions regarding compatibility, or troubleshooting not covered in this manual, please contact XIHADA customer support through the Amazon email system. We aim to respond within 24 hours.

**Manufacturer:** Xiamen Xihada Information Technology Co., Ltd

