Manuals+
Q & A | Deep Search | Upload

Intermatic T101B

Intermatic T101B 24-Hour Mechanical Time Switch User Manual

Model: T101B

Brand: Intermatic

1. Important Safety Information

Please read and understand all instructions before installing or operating this device. Failure to follow these instructions could result in electrical shock, fire, or serious injury.

- Disconnect power at the circuit breaker or fuse box before installing or servicing.
- Installation and wiring must comply with all national and local electrical codes.
- This device is intended for indoor use in a NEMA 1 enclosure.
- Do not exceed the maximum electrical ratings of the device.
- Ensure all connections are secure and properly insulated.
- If you are unsure about any part of these instructions, consult a qualified electrician.

---

2. Product Overview

The Intermatic T101B is a heavy-duty 24-hour mechanical time switch designed for residential, commercial, and industrial applications. It provides direct 24-hour control for various electrical loads up to 40 Amps. This model features a single-pole, single-throw (SPST) switch and includes one ON and one OFF tripper for programming daily operations.

Key features include:

- Controls electrical loads up to 40 Amps.
- Provides direct 24-hour control of most loads.
- Capable of 1 to 12 ON/OFF operations each day.
- Minimum ON/OFF time of 1 hour.
- Manual override capability.
- Equipped with one ON and one OFF tripper.
- Separate clock motor terminals for switching circuits not on line voltage.

This image displays the packaging for the Intermatic T101B Mechanical Time Switch. The packaging highlights features such as all-metal construction, heavy-duty lockable metal enclosure, tamper-proof design, resistance to temperature extremes, and heavy-duty gear train. The model number T101B and voltage 120V are clearly visible, along with a diagram of the timer dial and isolated input/output terminals.

---

3. Specifications

Feature	Value
Model Number	T101B
Operating Voltage	120 Volts
Current Rating	40 Amps
Operation Mode	Automatic
Contact Type	Normally Open (SPST)
Connector Type	Screw Terminals
Circuit Type	1-way
Minimum ON/OFF Time	1 Hour
Product Dimensions (L x W x H)	7 x 7 x 7 inches
Item Weight	2.7 Pounds
Manufacturer	Intermatic

---

4. Installation (Setup)

Installation of the Intermatic T101B should be performed by a qualified electrician in accordance with all national and local electrical codes. Ensure power is disconnected before beginning installation.

4.1 Mounting

1. Select a suitable indoor location for mounting the timer, ensuring it is protected from moisture and extreme temperatures.

2. Securely mount the timer's enclosure to a wall or suitable surface using appropriate fasteners.

4.2 Wiring

Refer to the wiring diagram provided inside the timer's enclosure for specific connection details. The T101B features screw terminals for connections.

- **Line (L):** Connect the incoming 120V power supply to the 'LINE' terminal.
- **Load (LOAD):** Connect the wire leading to the appliance or lighting fixture you wish to control to the 'LOAD' terminal.
- **Neutral (N):** Connect the neutral wire from the power supply to the 'NEUTRAL' terminal.
- **Ground (GND):** Connect the ground wire to the designated ground terminal.
- **Clock Motor Terminals:** If using separate power for the clock motor, connect the appropriate voltage to the dedicated clock motor terminals as per the internal diagram. Otherwise, the clock motor typically draws power from the line voltage.

After wiring, ensure all connections are tight and the enclosure is properly closed before restoring power.

---

5. Operation

The Intermatic T101B uses a mechanical dial and trippers for programming.

5.1 Setting the Current Time

1. Rotate the dial clockwise until the current time aligns with the time arrow or indicator on the timer mechanism.
2. Ensure AM/PM is correctly observed if your dial has such markings.

5.2 Programming ON/OFF Cycles

The T101B comes with one ON tripper and one OFF tripper. Additional trippers can be purchased separately for more cycles.

1. Locate the ON tripper (typically green or silver) and the OFF tripper (typically red or black).
2. To set an ON time, push the ON tripper onto the dial at the desired time.
3. To set an OFF time, push the OFF tripper onto the dial at the desired time.
4. Ensure the trippers are firmly seated and make contact with the switch mechanism as the dial rotates.
5. The minimum time between an ON and OFF tripper is 1 hour.

5.3 Manual Override

The timer includes a manual override switch, typically a lever or button, that allows you to temporarily turn the connected load ON or OFF without affecting the programmed schedule. The timer will resume its programmed schedule at the next scheduled ON or OFF event.

---

6. Maintenance

The Intermatic T101B is designed for reliable operation with minimal maintenance.

- Periodically inspect the timer for any signs of damage or loose connections.
- Keep the enclosure clean and free from dust and debris.
- Do not lubricate any internal components.

- If the timer is exposed to harsh environments, ensure the enclosure remains sealed.

---

7. Troubleshooting

If you encounter issues with your Intermatic T101B, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Timer does not turn ON/OFF at programmed times.	Trippers not set correctly or loose.	Ensure ON/OFF trippers are firmly seated on the dial at the desired times.
Load remains ON or OFF continuously.	Manual override engaged.	Check the manual override switch and return it to the automatic position.
Clock dial is not advancing.	No power to the clock motor or motor failure.	Verify power supply to the timer. If power is present and the dial still doesn't move, the clock motor may require service or replacement.
No power to the connected load.	Loose wiring, tripped circuit breaker, or faulty timer.	Check all wiring connections. Reset the circuit breaker. If issues persist, consult a qualified electrician.

---

8. Warranty and Support

8.1 Warranty Information

Intermatic products are manufactured to high-quality standards and are typically backed by a limited warranty. For specific warranty terms and conditions applicable to your T101B model, please refer to the warranty card included with your product or visit the official Intermatic website.

8.2 Customer Support

For technical assistance, troubleshooting, or inquiries regarding your Intermatic T101B time switch, please contact Intermatic customer support. You can find contact information, FAQs, and additional resources on the official Intermatic website or by visiting their store on Amazon: Intermatic Store.

Related Documents - T101B



[Intermatic T101P201/T101R201 24-Hour Time Switch with Fireman Switch](#)

Detailed guide for Intermatic T101P201 (plastic) and T101R201 (metal) 24-hour dial time switches with fireman switch functionality for pool heaters. Includes wiring, programming, and operating instructions.

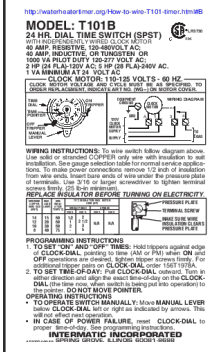

[Intermatic T101B 24-Hour Dial Time Switch: Model and Operation Guide](#)

Comprehensive guide for the Intermatic T101B 24-hour dial time switch, detailing specifications, wiring instructions, programming, and operation for electrical timing applications.



[Intermatic DT101 24-Hour Digital Time Switch: Installation and Operation Guide](#)

A comprehensive guide for installing, programming, and operating the Intermatic DT101 24-Hour Digital Time Switch. Covers safety precautions, product specifications, setup, programming, operation modes, and warranty information.



[Intermatic ET1100 Series Electronic Time Switches: Features, Specifications, and Models](#)

Detailed information on the Intermatic ET1100 Series 24-Hour Electronic Time Switches, including features, technical specifications, contact ratings, enclosure options, and model variations for accurate load control.

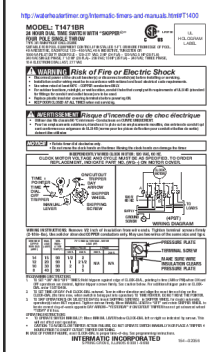

[Intermatic T1471BR 24-Hour Dial Time Switch: Installation and Operation](#)

Detailed guide for the Intermatic T1471BR 24-hour dial time switch, covering installation, wiring, programming, and operating instructions for pool equipment and other applications. Features include Skipper® functionality and 4-pole single throw design.

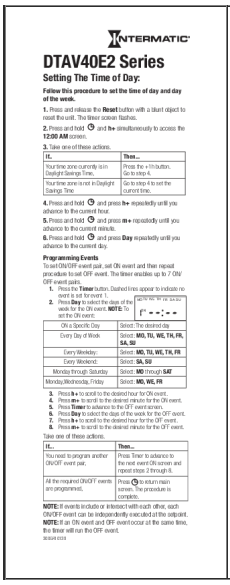

INTERMATIC

DTAV40E2 Series

Setting The Time of Day:

Follow this procedure to set the time of day and day of the week.

1. Press and release the **Reset** button with a blunt object to reset the unit. The timer screen flashes.

2. Press and hold ◷ and **h+** simultaneously to access the **12:00 AM** screen.

3. Take one of these actions.

If...	Then...
Your time zone is currently in Daylight Savings Time,	Press the **+** button. Go to step 4.
Your time zone is not in Daylight Savings Time,	Go to step 4 to set the current time.

4. Press and hold ◷ and press **h+** repeatedly until you advance to the current hour.

5. Press and hold ◷ and press **m+** repeatedly until you advance to the current minute.

6. Press and hold ◷ and press **Day** repeatedly until you advance to the current day.

Programming Events

To set ON/OFF event pair, set ON event and then repeat procedure to set OFF event. The timer enables up to 7 ON/OFF event pairs.

1. Press the **Timer** button. Dashed lines appear to indicate no event is set for event 1.
2. Press **Day** to select the days of the week for the ON event. **NOTE:** To set the ON event:

ON a Specific Day	Select: The desired day
Every Day of Week	Select: **MO, TU, WE, TH, FR, SA, SU**
Every Weekday	Select: **MO, TU, WE, TH, FR**
Every Weekend	Select: **SA, SU**
Monday through Saturday	Select: **MO** through **SAT**
Monday,Wednesday, Friday	Select: **MO, WE, FR**

3. Press **h+** to scroll to the desired hour for ON event.
4. Press **m+** to scroll to the desired minute for the ON event.
5. Press **Timer** to advance to the OFF event screen.
6. Press **Day** to select the days of the week for the OFF event.
7. Press **h+** to scroll to the desired hour for the OFF event.
8. Press **m+** to scroll to the desired minute for the OFF event.

Take one of these actions.

If...	Then...
You need to program another ON/OFF event pair,	Press Timer to advance to the next event ON screen and repeat steps 2 through 8.
All the required ON/OFF events are programmed,	Press ◷ to return main screen. The procedure is complete.

NOTE: If events include or intersect with each other, each ON/OFF event can be independently executed of the subpoint.

NOTE: If an ON event and OFF event occur at the same time, the timer will run the OFF event.

[Intermatic DTAV40E2 Series: Setting the Time of Day and Programming Events](#)

A guide to setting the time of day, day of the week, and programming ON/OFF events for the Intermatic DTAV40E2 Series electronic timer.

Documents - Intermatic – T101B

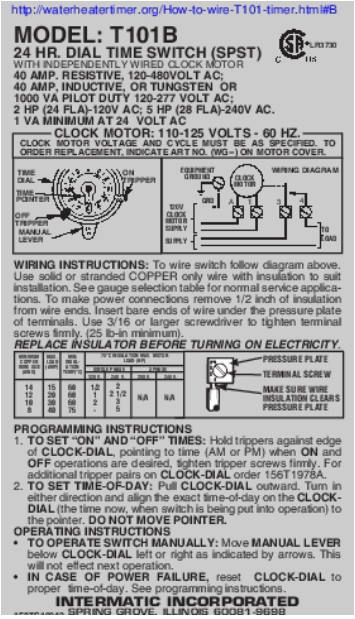

http://waterheatertimer.org/How-to-wire-T101-timer.html#B

MODEL: T101B

24 HR. DIAL TIME SWITCH (SPST)

WITH INDEPENDENTLY WIRED CLOCK MOTOR

40 AMP. RESISTIVE, 120-480VOLT AC;
40 AMP, INDUCTIVE, OR TUNGSTEN OR
1000 VA PILOT DUTY 120-277 VOLT AC;
2 HP (24 FLA)-120V AC; 5 HP (28 FLA)-240V AC.
1 VA MINIMUM AT 24 VOLT AC

CLOCK MOTOR: 110-125 VOLTS - 60 HZ.

CLOCK MOTOR VOLTAGE AND CYCLE MUST BE AS SPECIFIED. TO ORDER REPLACEMENT, INDICATE ART NO. (WG-) ON MOTOR COVER.

TIME DIAL, TIME POINTER, OFF TRIPPER, MANUAL LEVER, ON TRIPPER, EQUIPMENT CONDUIT, CLOCK MOTOR, WIRING DIAGRAM, GRD, A, T, 120V CLOCK MOTOR SUPPLY, SUPPLY, TO LOAD

WIRING INSTRUCTIONS: To wire switch follow diagram above. Use solid or stranded COPPER only wire with insulation to suit installation. See gauge selection table for normal service applications. To make power connections remove 1/2 inch of insulation from wire ends. Insert bare ends of wire under the pressure plate of terminals. Use 3/16 or larger screwdriver to tighten terminal screws firmly. (25 lb-in minimum).

REPLACE INSULATOR BEFORE TURNING ON ELECTRICITY.

MIN WIRE SIZE (AWG)	MAX. LOAD AMPS	MIN. WIRE SIZE (AWG)	75°C INSULATION TEMP. MOTOR LOAD (HP)			
			SINGLE PHASE		THREE PH	
			120 V	240 V	208 V	240 V
14	15	60	1/2	2		
12	20	60	1	2 1/2		
10	30	60	2	3		
8	40	75		5	N/A	N/A

PRESSURE PLATE, TERMINAL SCREW, MAKE SURE WIRE INSULATION CLEARS PRESSURE PLATE

PROGRAMMING INSTRUCTIONS

1. **TO SET "ON" AND "OFF" TIMES:** Hold trippers against edge of **CLOCK-DIAL**, pointing to time (AM or PM) when **ON** and **OFF** operations are desired, tighten tripper screws firmly. For additional tripper pairs on **CLOCK-DIAL** order 156T1978A.
2. **TO SET TIME-OF-DAY:** Pull **CLOCK-DIAL** outward. Turn in either direction and align the exact time-of-day on the **CLOCK-DIAL** (the time now, when switch is being put into operation) to the pointer. **DO NOT MOVE POINTER.**

OPERATING INSTRUCTIONS

- **TO OPERATE SWITCH MANUALLY:** Move **MANUAL LEVER** below **CLOCK-DIAL** left or right as indicated by arrows. This will not effect next operation.
- **IN CASE OF POWER FAILURE,** reset **CLOCK-DIAL** to proper time-of-day. See programming instructions.

INTERMATIC INCORPORATED

SPRING GROVE, ILLINOIS 60081-9698

[Intermatic T101B 24-Hour Dial Time Switch: Model and Operation Guide](#)

Comprehensive guide for the Intermatic T101B 24-hour dial time switch, detailing specifications, wiring instructions, programming, and operation for electrical timing applications.

lang:en score:58 filesize: 84.57 K page_count: 1 document date: 2009-06-30

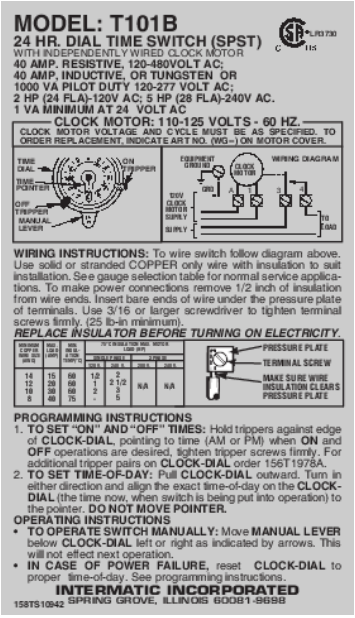

MODEL: T101B

24 HR. DIAL TIME SWITCH (SPST)

WITH INDEPENDENTLY WIRED CLOCK MOTOR

40 AMP. RESISTIVE, 120-480VOLT AC;
40 AMP, INDUCTIVE, OR TUNGSTEN OR
1000 VA PILOT DUTY 120-277 VOLT AC;
2 HP (24 FLA)-120V AC; 5 HP (28 FLA)-240V AC.
1 VA MINIMUM AT 24 VOLT AC

CLOCK MOTOR: 110-125 VOLTS - 60 HZ.

CLOCK MOTOR VOLTAGE AND CYCLE MUST BE AS SPECIFIED. TO ORDER REPLACEMENT, INDICATE ART NO. (WG-) ON MOTOR COVER.

TIME DIAL, TIME POINTER, OFF TRIPPER, MANUAL LEVER, ON TRIPPER, EQUIPMENT CONDUIT, CLOCK MOTOR, WIRING DIAGRAM, GRD, A, T, 120V CLOCK MOTOR SUPPLY, SUPPLY, TO LOAD

WIRING INSTRUCTIONS: To wire switch follow diagram above. Use solid or stranded COPPER only wire with insulation to suit installation. See gauge selection table for normal service applications. To make power connections remove 1/2 inch of insulation from wire ends. Insert bare ends of wire under the pressure plate of terminals. Use 3/16 or larger screwdriver to tighten terminal screws firmly. (25 lb-in minimum).

REPLACE INSULATOR BEFORE TURNING ON ELECTRICITY.

MIN WIRE SIZE (AWG)	MAX. LOAD AMPS	MIN. WIRE SIZE (AWG)	75°C INSULATION TEMP. MOTOR LOAD (HP)			
			SINGLE PHASE		THREE PH	
			120 V	240 V	208 V	240 V
14	15	60	1/2	2		
12	20	60	1	2 1/2		
10	30	60	2	3		
8	40	75		5	N/A	N/A

PRESSURE PLATE, TERMINAL SCREW, MAKE SURE WIRE INSULATION CLEARS PRESSURE PLATE

PROGRAMMING INSTRUCTIONS

1. **TO SET "ON" AND "OFF" TIMES:** Hold trippers against edge of **CLOCK-DIAL**, pointing to time (AM or PM) when **ON** and **OFF** operations are desired, tighten tripper screws firmly. For additional tripper pairs on **CLOCK-DIAL** order 156T1978A.
2. **TO SET TIME-OF-DAY:** Pull **CLOCK-DIAL** outward. Turn in either direction and align the exact time-of-day on the **CLOCK-DIAL** (the time now, when switch is being put into operation) to the pointer. **DO NOT MOVE POINTER.**

OPERATING INSTRUCTIONS

- **TO OPERATE SWITCH MANUALLY:** Move **MANUAL LEVER** below **CLOCK-DIAL** left or right as indicated by arrows. This will not effect next operation.
- **IN CASE OF POWER FAILURE,** reset **CLOCK-DIAL** to proper time-of-day. See programming instructions.

INTERMATIC INCORPORATED

158TS10942 SPRING GROVE, ILLINOIS 60081-9698

[pdf] User Manual Instructions Documentation Diagram

T101B Instructions ashx t101b instructions intermatic 80 ~ media Intermatic Documentation Time Switches Mechanical 24 Hour T100 Series documentation time switches mechanical hour t100 series

MODEL: **T101B** 24 HR. DIAL TIME SWITCH SPST LR3730 WITH INDEPENDENTLY WIRED CLOCK MOTOR 40 AMP. RESISTIVE, 120-480VOLT AC; 40 AMP, INDUCTIVE, OR TUNGSTEN OR 1000 VA PILOT DUTY 120-277 VOLT AC; 2 HP 24 FLA -120V AC; 5 HP 28 FLA -240V AC. 1 VA MINIMUM AT 24 VOLT AC CLOCK MOTOR: 110-125 VOLT...

lang:en score:45 filesize: 83.73 K page_count: 1 document date: 2009-06-30

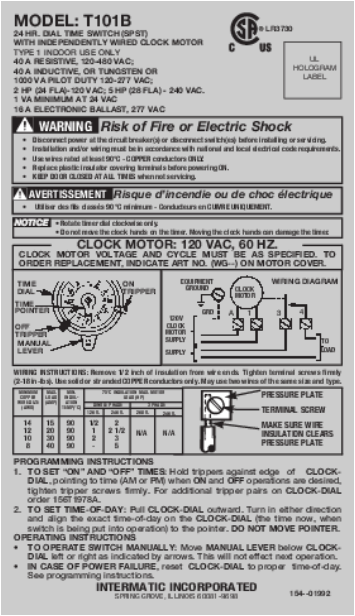

MODEL: T101B
24 HR. DIAL TIME SWITCH (SP ST)
WITH INDEPENDENTLY WIRED CLOCK MOTOR
TYPE 1 INDOOR USE ONLY
40 A RESISTIVE, 120-480 VAC;
40 A INDUCTIVE, OR TUNGSTEN OR
1000 VA PILOT DUTY 120-277 VAC;
2 HP (24 FLA)-120 VAC; 5 HP (28 FLA) - 240 VAC.
1 VA MINIMUM AT 24 VAC
16 A ELECTRONIC BALLAST, 277 VAC

UL HOLOGRAM LABEL

WARNING Risk of Fire or Electric Shock
- Disconnect power at the circuit breaker(s) or disconnect switch(es) before installing or servicing.
- Installation and/or wiring must be in accordance with national and local electrical code requirements.
- Use wires rated at least 90°C - COPPER conductors ONLY.
- Replace plastic insulator covering terminal before powering ON.
- KEEP DOOR CLOSED AT ALL TIMES when not servicing.

AVERTISSEMENT Risque d'incendie ou de choc électrique
- Utiliser des fils classés 90 °C minimum - Conducteurs en CUIVRE UNIQUEMENT.

NOTICE
- Rotate timer dial clockwise only.
- Do not move the clock hands on the timer. Moving the clock hands can damage the timer.

CLOCK MOTOR: 120 VAC, 60 HZ.
CLOCK MOTOR VOLTAGE AND CYCLE MUST BE AS SPECIFIED. TO ORDER REPLACEMENT, INDICATE ART NO. (WG--) ON MOTOR COVER.

TIME DIAL, TIME POINTER, ON TRIPPER, OFF TRIPPER, MANUAL LEVER

WIRING DIAGRAM: EQUIPMENT GROUND, CLOCK MOTOR, GRD, A, 1, 3, 4, 120V CLOCK MOTOR SUPPLY, 240V CLOCK MOTOR SUPPLY, TO LOAD

WIRING INSTRUCTIONS: Remove 1/2 inch of insulation from wire ends. Tighten terminal screws firmly (2-10 in-lbs). Use solid or stranded COPPER conductors only. May use two wires of the same size and type.

MAXIMUM LOAD AMPS PER CIRCUIT (AMPS)	MIN. WIRE SIZE (AWG)	MIN. WIRE SIZE (mm²)	TYPE 3R(NEMA 3R) MAX. WIRE SIZE AS AN AWG			
			120 V.	240 V.	240 V.	240 V.
14	15	90	1/2	2		
12	20	90	1	2 1/2	N/A	N/A
10	30	90	2	3		
8	40	90		5		

PRESSURE PLATE
TERMINAL SCREW
MAKE SURE WIRE INSULATION CLEARS PRESSURE PLATE

PROGRAMMING INSTRUCTIONS
1. TO SET "ON" AND "OFF" TIMES: Hold tripper against edge of CLOCK-DIAL, pointing to time (AM or PM) when ON and OFF operations are desired, tighten tripper screws firmly. For additional tripper pairs on CLOCK-DIAL order 156T 1978A.
2. TO SET TIME-OF-DAY: Pull CLOCK-DIAL outward. Turn in either direction and align the exact time-of-day on the CLOCK-DIAL (the time now, when switch is being put into operation) to the pointer. DO NOT MOVE POINTER.

OPERATING INSTRUCTIONS
- TO OPERATE SWITCH MANUALLY: Move MANUAL LEVER below CLOCK-DIAL left or right as indicated by arrows. This will not effect next operation.
- IN CASE OF POWER FAILURE, reset CLOCK-DIAL to proper time-of-day. See programming instructions.

INTERMATIC INCORPORATED
SPRING GROVE, ILLINOIS 60081-9698
154-01992

[pdf] User Manual Instructions Label

T101B Door Label Instructions Intermatic Province Electric Supply

aca34be535dc7bac1c177e981b92d6b5db41b2b5 media province electric intermatic 2018q1 |||

MODEL: **T101B** 24 HR. DIAL TIME SWITCH SPST WITH INDEPENDENTLY WIRED CLOCK MOTOR TYPE 1 INDOOR USE ONLY 40 A RESISTIVE, 120-480 VAC; 40 A INDUCTIVE, OR TUNGSTEN OR 1000 VA PILOT DUTY 120-277 VAC; 2 HP 24 FLA -120 VAC; 5 HP 28 FLA - 240 VAC. 1 VA MINIMUM AT 24 VAC 16 A ELECTRONIC BALLAST, 277 VAC ...

lang:en score:43 filesize: 184.35 K page_count: 1 document date: 2014-11-17

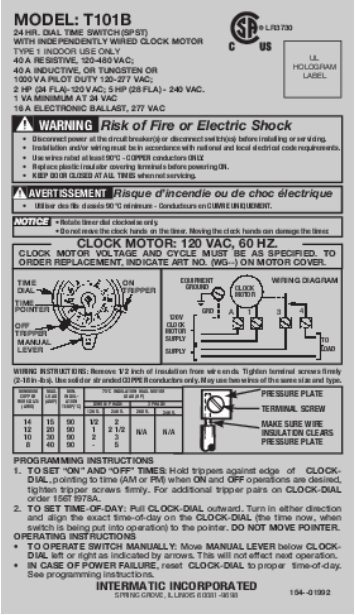

MODEL: T101B
24 HR. DIAL TIME SWITCH (SP ST)
WITH INDEPENDENTLY WIRED CLOCK MOTOR
TYPE 1 INDOOR USE ONLY
40 A RESISTIVE, 120-480 VAC;
40 A INDUCTIVE, OR TUNGSTEN OR
1000 VA PILOT DUTY 120-277 VAC;
2 HP (24 FLA)-120 VAC; 5 HP (28 FLA) - 240 VAC.
1 VA MINIMUM AT 24 VAC
16 A ELECTRONIC BALLAST, 277 VAC

UL HOLOGRAM LABEL

WARNING Risk of Fire or Electric Shock
- Disconnect power at the circuit breaker(s) or disconnect switch(es) before installing or servicing.
- Installation and/or wiring must be in accordance with national and local electrical code requirements.
- Use wires rated at least 90°C - COPPER conductors ONLY.
- Replace plastic insulator covering terminal before powering ON.
- KEEP DOOR CLOSED AT ALL TIMES when not servicing.

AVERTISSEMENT Risque d'incendie ou de choc électrique
- Utiliser des fils classés 90 °C minimum - Conducteurs en CUIVRE UNIQUEMENT.

NOTICE
- Rotate timer dial clockwise only.
- Do not move the clock hands on the timer. Moving the clock hands can damage the timer.

CLOCK MOTOR: 120 VAC, 60 HZ.
CLOCK MOTOR VOLTAGE AND CYCLE MUST BE AS SPECIFIED. TO ORDER REPLACEMENT, INDICATE ART NO. (WG--) ON MOTOR COVER.

TIME DIAL, TIME POINTER, ON TRIPPER, OFF TRIPPER, MANUAL LEVER

WIRING DIAGRAM: EQUIPMENT GROUND, CLOCK MOTOR, GRD, A, 1, 3, 4, 120V CLOCK MOTOR SUPPLY, 240V CLOCK MOTOR SUPPLY, TO LOAD

WIRING INSTRUCTIONS: Remove 1/2 inch of insulation from wire ends. Tighten terminal screws firmly (2-10 in-lbs). Use solid or stranded COPPER conductors only. May use two wires of the same size and type.

MAXIMUM LOAD AMPS PER CIRCUIT (AMPS)	MIN. WIRE SIZE (AWG)	MIN. WIRE SIZE (mm²)	TYPE 3R(NEMA 3R) MAX. WIRE SIZE AS AN AWG			
			120 V.	240 V.	240 V.	240 V.
14	15	90	1/2	2		
12	20	90	1	2 1/2	N/A	N/A
10	30	90	2	3		
8	40	90		5		

PRESSURE PLATE
TERMINAL SCREW
MAKE SURE WIRE INSULATION CLEARS PRESSURE PLATE

PROGRAMMING INSTRUCTIONS
1. TO SET "ON" AND "OFF" TIMES: Hold tripper against edge of CLOCK-DIAL, pointing to time (AM or PM) when ON and OFF operations are desired, tighten tripper screws firmly. For additional tripper pairs on CLOCK-DIAL order 156T 1978A.
2. TO SET TIME-OF-DAY: Pull CLOCK-DIAL outward. Turn in either direction and align the exact time-of-day on the CLOCK-DIAL (the time now, when switch is being put into operation) to the pointer. DO NOT MOVE POINTER.

OPERATING INSTRUCTIONS
- TO OPERATE SWITCH MANUALLY: Move MANUAL LEVER below CLOCK-DIAL left or right as indicated by arrows. This will not effect next operation.
- IN CASE OF POWER FAILURE, reset CLOCK-DIAL to proper time-of-day. See programming instructions.

INTERMATIC INCORPORATED
SPRING GROVE, ILLINOIS 60081-9698
154-01992

[pdf] User Manual Instructions Label

MODEL T101B 9473 t101b instructions en dtrermj9469s cloudfront net userfiles images inriver original |||

MODEL: **T101B** 24 HR. DIAL TIME SWITCH SPST WITH INDEPENDENTLY WIRED CLOCK MOTOR TYPE 1 INDOOR USE ONLY 40 A RESISTIVE, 120-480 VAC; 40 A INDUCTIVE, OR TUNGSTEN OR 1000 VA PILOT DUTY 120-277 VAC; 2 HP 24 FLA -120 VAC; 5 HP 28 FLA - 240 VAC. 1 VA MINIMUM AT 24 VAC 16 A ELECTRONIC BALLAST, 277 VAC ...

lang:en score:39 filesize: 184.31 K page_count: 1 document date: 2014-11-17

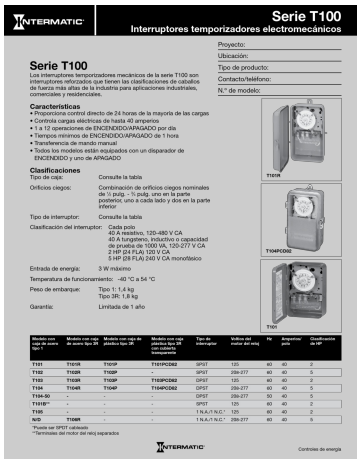

INTERMATIC
Serie T100
Interruptores temporizadores electromecánicos

Proyecto:
Ubicación:
Tipo de producto:
Contacto/teléfono:
N.º de modelo:

Serie T100

Los interruptores temporizadores mecánicos de la serie T100 son interruptores reforzados que tienen las clasificaciones de cabalos de fuerza más altas de la industria para aplicaciones industriales, comerciales y residenciales.

Características
- Proporciona control directo de 24 horas de la mayoría de las cargas
- Controla cargas eléctricas de hasta 40 amperios
- 1 a 12 operaciones de ENCENDIDO/APAGADO por día
- Tiempo mínimo de ENCENDIDO/APAGADO de 1 hora
- Transferencia de mando manual
- Todos los modelos están equipados con un disparador de ENCENDIDO y uno de APAGADO

Clasificaciones
Tipo de caja: Consulte la tabla
Orificios ciegos: Combinación de orificios ciegos nominales de ½ pulg. - ¾ pulg. uno en la parte posterior, uno a cada lado y dos en la parte inferior
Tipo de interruptor: Consulte la tabla
Clasificación del interruptor: Cada polo
40 A resistivo, 120-480 V CA
40 A tungsteno, inductivo o capacidad de pruebas de 1000 VA, 120-277 V CA
2 HP (24 FLA) 120 V CA
5 HP (28 FLA) 240 V CA monofásico
Entrada de energía: 3 W máximo
Temperatura de funcionamiento: -40 °C a 54 °C
Peso de embarque: Tipo 1: 1,4 kg
Tipo 3R: 1,8 kg
Garantía: Limitada de 1 año

T101R
T104PCD02
T100

Modelo con caja de acero Tipo 1	Modelo con caja de acero Tipo 3R	Modelo con caja plástica Tipo 3R	Modelo con caja plástica Tipo 3R con cubierta transparente	Tipo de interruptor	Voltios del motor del reloj	Hp	Amperios* polo	Clasificación de HP
T101	T101R	T103P	T101PCD02	SPST	125	40	40	2
T102	T102R	T102P	-	SPST	204-277	40	40	5
T103	T103R	T103P	T103PCD02	DPST	125	40	40	2
T104	T104R	T104P	T104PCD02	DPST	204-277	40	40	5
T104-50	-	-	-	DPST	204-277	50	40	5
T101B**	-	-	-	SPST	125	60	40	2
T106	-	-	-	1 N.A./1 N.C.*	125	60	40	2
N/D	T106R	-	-	1 N.A./1 N.C.*	204-277	60	40	5

*Puede ser SPDT cableado
**Terminales del motor del reloj separados

INTERMATIC
Controles de energía

Interruptores Temporizadores Electromecánicos Intermatic Serie T100: Especificaciones y Diagramas

Especificaciones detalladas, características y diagramas de cableado para los interruptores temporizadores electromecánicos Intermatic Serie T100, incluyendo variaciones de modelo, clasificaciones eléctricas y tipos de caja.

lang:es score:35 filesize: 916.71 K page_count: 2 document date: 2012-10-02

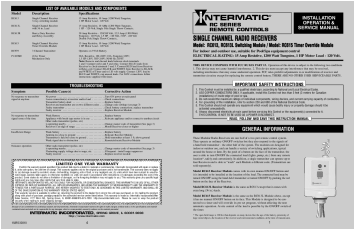

[pdf] User Manual Installation Guide Instructions Troubleshooting Guide Specifications Documentation

Installation Operation Service Manual INYO Pools LIST OF AVAILABLE MODELS AND COMPONENTS Model RC615 Receiver Module is the same as RC613L above except it has no manual ON OFF button on its face This designed to be con connections follow instructions supplied with timer TROUBLESHOOTING Symptom Possible Cause s Corrective Action No response transmitter IMPORTANT SAFETY INSTRUCTIONS 1 Control must installed by a qualified electrician according National and Local Electrical Codes 2 USE COPPER CONDUCTORS ONLY If applicable install this not less than 5 feet 3 meters for Canadian installations of inside edge pool or spa p7103me 01 rc615 installation operation service RC600 Series Instructions ashx edc poolsupplyworld w lesl bigcontent io v1 static images inyopools cloud documents intermatic 80 ~ media Intermatic Documentation Pool Spa Specialty Controls RC

Model RC613 RC613L RC613R RC615 RC939 P1103ME LIST OF AVAILABLE MODELS AND COMPONENTS Description ... g the ON/OFF control of the timer. 6. Set code, see operating instructions on page 3. 120V. TIMER **T101B** or SIMILAR INDEPENDENTLY WIRED CLOCK MOTOR OPERATION In case this device is used to operate...

lang:en score:34 filesize: 294.09 K page_count: 2 document date: 2006-09-11

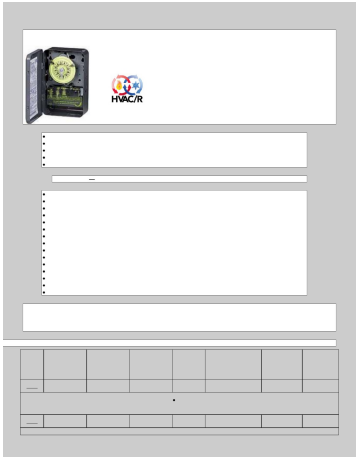

[pdf] User Manual Guide

Judy Hargreaves Intermatic T101 Manual Pdf MODEL T101R LR3730 24 HR DIAL TIME SWITCH SPST 734030 tech guide hydroponics net item documents 131855 |||

T100 Series 24 Hour Electrical loads up to 40 Amps Provides direct 24 hour control of most loads 1 ... ts 60 Hz 125 Amps per pole 40 HP Rating 2 T104 T104PCD82 T104P T104R DPST 208-277 40 5 **T101B*** Not Available Not Available T106R SPST 125 T105 Not Available Not Available Not Avail...

lang:en score:33 filesize: 110.14 K page_count: 2 document date: 2011-12-13

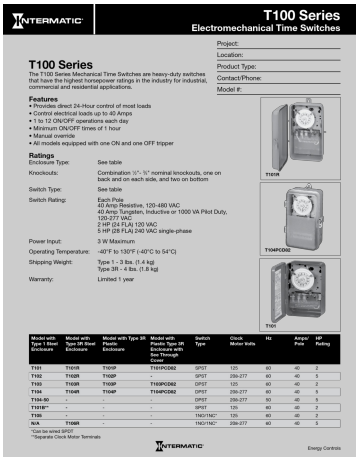

[pdf] User Manual Documentation Guide Warranty

003 T100 Series 2pgs ashx ZFZiQiRCWUXyFsotg4HddbeqEgJEeEcbQi intermatic 80 ~ media Intermatic Documentation Specifier Guide zoro static cms enhanced

T100 Series Electromechanical Time Switches Project: T100 Series The T100 Series Mechanical Time S ... 2 T102R T102P - T103 T103R T103P T103PCD82 T104 T104R T104P T104PCD82 T104-50 - - - **T101B**** - - - T105 - - - N/A T106R - - *Can be wired SPDT **Separate Clock Motor Termina...

lang:en score:33 filesize: 934.26 K page_count: 2 document date: 2011-09-06

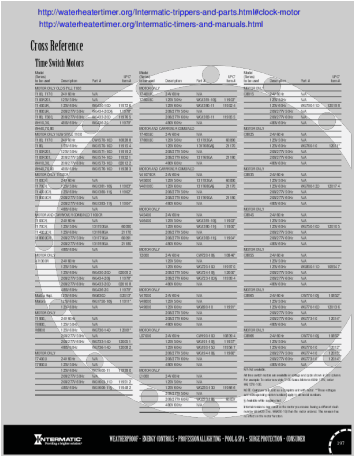

[pdf]

ts89 goodser Intermatic cross reference a waterheatertimer org See timers and manuals ||| http://waterheatertimer.org/Intermatic-trippers-and-parts.html#clock-motor http://waterheatertimer.o ... 4002-71 1102 T103 4003-00 1103/1962 T104 4004-71, 4004-20 1104/1962 T105 4005-00S 3121 **T101B** 4001-00V -- T101R 4011-00 1101-0/1191-0 T102R 4012-20 -- T103R 4013-00 1103-0/1962-...

lang:es score:29 filesize: 242.47 K page_count: 6 document date: 2010-07-31

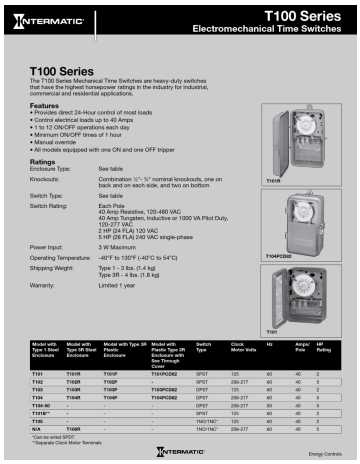

Intermatic T100 Series Electromechanical Time Switches

Overview of Intermatic T100 Series heavy-duty electromechanical time switches, detailing features, specifications, ratings, and model options for industrial, commercial, and residential applications.

lang:en score:28 filesize: 1.01 M page_count: 2 document date: 2011-09-06

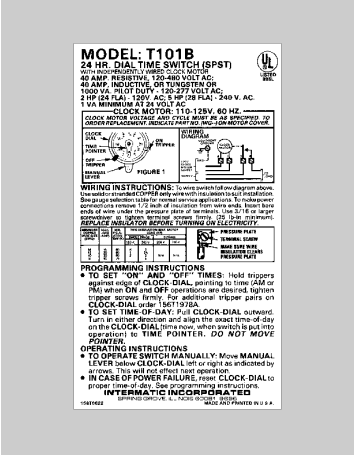

[pdf]

t101b intermatic 80 images misc old manuals

...

lang:en score:27 filesize: 51.91 K page_count: 1 document date: 1999-10-12

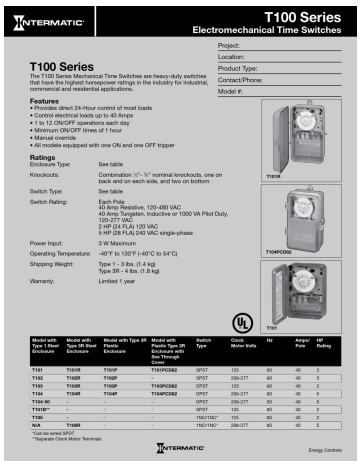

[pdf] User Manual Specifications Documentation Guide Warranty Diagram

T100 Series images na ssl amazon bse assets azureedge net Energy Controls intermatic Diagrams Specification The time switch shall be of the 24 Hour dial type capable permitting up to 12 ON OFF operations each day 91IF4vIS72L ISSheet 103131 5305 8656 003 2pgs T102 i 4E6960AF 791A 49F5 971E E630F0743F21 I 80 media inriver ashx ~ Intermatic Documentation Specifier Guide rexel cdn Products

T100 Series Electromechanical Time Switches Project: T100 Series The T100 Series Mechanical Time S ... 2 T102R T102P - T103 T103R T103P T103PCD82 T104 T104R T104P T104PCD82 T104-50 - - - **T101B**** - - - T105 - - - N/A T106R - - *Can be wired SPDT **Separate Clock Motor Termina...

lang:en score:25 filesize: 724.08 K page_count: 2 document date: 2014-11-10

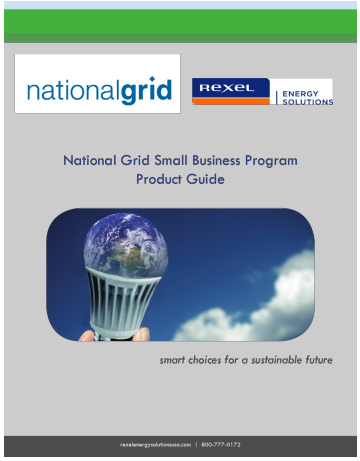

[pdf] User Manual Guide

National Grid Small Business Program Product Guide Please type additional options in manually on the lines provided This state of art design requires no manual field adjustments NationalGrid SmallBusinessGuide FINAL munroelectric silvereclipse images content

National Grid Small Business Program Product Guide smart choices for a sustainable future rexelenerg ... 2 T102R T102P - T103 T103R T103P T103PCD82 T104 T104R T104P T104PCD82 T104-50 - - - **T101B**** - - - T105 - - - N/A T106R - - *Can be wired SPDT **Separate Clock Motor Termina...

lang:en score:24 filesize: 46.36 M page_count: 260 document date: 2014-02-18

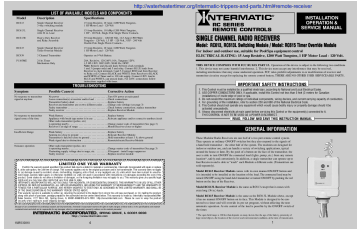

[pdf] Specifications

RC613 RC615 remote control Woods timers and manuals waterheatertimer org |||

http://waterheatertimer.org/Intermatic-trippers-and-parts.html#remote-receiver Model RC613 RC613L ... g the ON/OFF control of the timer. 6. Set code, see operating instructions on page 3. 120V. TIMER **T101B** or SIMILAR INDEPENDENTLY WIRED CLOCK MOTOR OPERATION In case this device is used to operate...

lang:en score:24 filesize: 381.86 K page_count: 2 document date: 2006-09-11

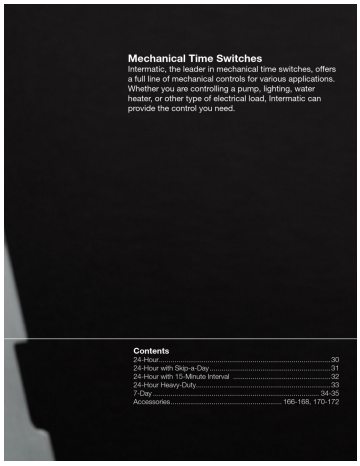

[pdf] User Manual Dimension Guide Warranty Accessories Borchure

Intermatic T101 Manual Pdf MODEL T101R LR3730 24 HR DIAL TIME SWITCH SPST Brochure inmechanicaltimeswitches s3 amazonaws supplyhouse product files literature neuco |||

Mechanical Time Switches Mechanical Time Switches Mechanical Time Switches Intermatic, the leader i ... Hz T103 DPST 120 VAC, 60 Hz T104 DPST 208-277 VAC, 60 Hz T104-50 DPST 208-277 VAC, 50 Hz **T101B*** SPST 120 VAC, 60 Hz T105 ** 1 NO/1 NC 120 VAC, 60 Hz Metal Indoor/Outdoor Enclosure T1...

lang:en score:24 filesize: 882.04 K page_count: 7 document date: 2018-05-14

[pdf] User Manual

Intermatic T101 Manual Pdf MODEL T101R LR3730 24 HR DIAL TIME SWITCH SPST Mechanical Time Switches ideadigitalcontent files 11158 |||

Mechanical Time Switches Mechanical Time Switches Agricultural Billboards Signs Indoor / O ut door ... nd one OFF tripper included Model # T101M T103M T104M T106M ** Model # T101 T102 T103 T104 T104-50 **T101B*** T105 ** A. Mechanism Only Switch Input Voltage SPST 125 VAC, 60Hz DPST 125 VAC, 60Hz ...

lang:en score:24 filesize: 6.38 M page_count: 16 document date: 2013-06-21

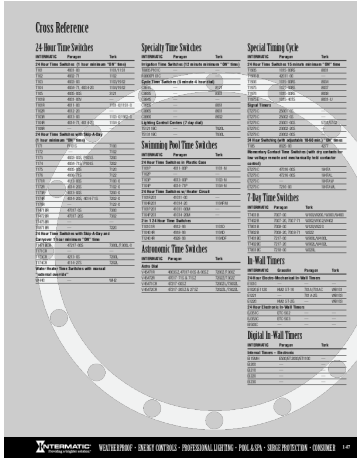

[pdf] User Manual Catalog

Intermatic General Catalog Paul Dulberg 147 intermatic images catalog pages

Cross Reference 24-Hour Time Switches INTERMATIC Paragon Tork 24 Hour Time Switches 1 hour minimum ON time T101 4001-00 1101/1191 T102 4002-71 1102 T103 4003-00 1103/1962 T104 4004-71, 4004-20 1104/1962 T105 4005-00S 3121 **T101B** 4001-00V -- T101R 4011-00 1101-0/1191-0 T...

lang:en score:22 filesize: 80.09 K page_count: 1 document date: 2006-01-25

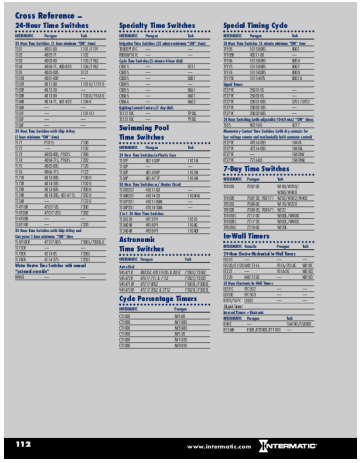

[pdf] User Manual Catalog

2004 Intermatic General Catalog p 112 intermatic 80 images catalog pages

Cross Reference 24-Hour Time Switches INTERMATIC Paragon Tork 24 Hour Time Switches 1 hour minimum ON time T101 4001-00 1101/1191 T102 4002-71 1102 T103 4003-00 1103/1962 T104 4004-71, 4004-20 1104/1962 T105 4005-00S 3121 **T101B** 4001-00V -- T101R 4011-00 1101-0/1191-0 T...

lang:en score:22 filesize: 87.77 K page_count: 1 document date: 2004-02-24

Intermatic Energy Controls Product Catalog

Comprehensive catalog of Intermatic's energy control solutions, including mechanical and electronic time switches, surge protection, lighting controls, and HVAC/R products. Features detailed product specifications, applications, and selection guides for commercial, industrial, and residential use.

lang:en score:21 filesize: 22.53 M page_count: 164 document date: 2010-08-10

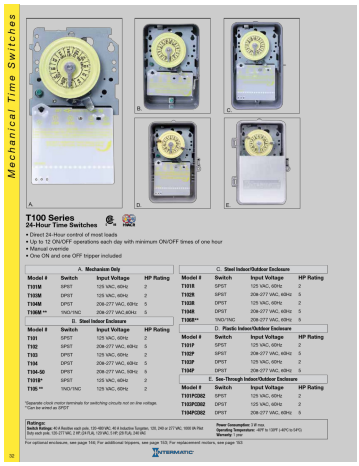

[pdf] User Manual Catalog

Intermatic T101 Manual Pdf MODEL T101R LR3730 24 HR DIAL TIME SWITCH SPST SPE General Catalog 32 ideadigitalcontent files 11158 |||

Mechanical Time Switches B. C. A. D. E. T100 Series 24-Hour Time Switches Direct 24-Hour cont ... nd one OFF tripper included Model # T101M T103M T104M T106M ** Model # T101 T102 T103 T104 T104-50 **T101B*** T105 ** A. Mechanism Only Switch Input Voltage SPST 125 VAC, 60Hz DPST 125 VAC, 60Hz ...

lang:en score:21 filesize: 277.49 K page_count: 1 document date: 2013-07-01

[Intermatic Product Catalog: Lighting Controls, Timers, and Electrical Solutions]

Explore the Intermatic Product Catalog featuring ARISTA™ lighting controls, mechanical and electronic timers, surge protection, and weatherproof solutions for residential, commercial, and industrial applications. Discover reliable, innovative, and durable electrical control products.

lang:en score:21 filesize: 37.99 M page_count: 196 document date: 2022-03-23

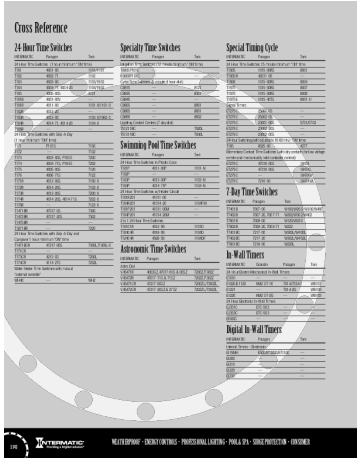

[pdf] User Manual Catalog

198 ashx intermatic 80 ~ media files catalog pages

Cross Reference 24-Hour Time Switches INTERMATIC Paragon Tork 24 Hour Time Switches 1 hour minimum ON time T101 4001-00 1101/1191 T102 4002-71 1102 T103 4003-00 1103/1962 T104 4004-71, 4004-20 1104/1962 T105 4005-00S 3121 **T101B** 4001-00V -- T101R 4011-00 1101-0/1191-0 ...

lang:en score:21 filesize: 81.31 K page_count: 1 document date: 2008-02-06

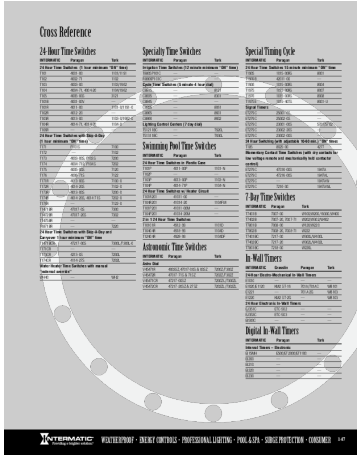

[pdf] User Manual Catalog

Intermatic General Catalog Paul Dulberg INTMATE00190 147 images tradeservice gjPilrcyNvvpVtln ATTACHMENTS DIR100014 |||

Cross Reference 24-Hour Time Switches INTERMATIC Paragon Tork 24 Hour Time Switches 1 hour minimum ON time T101 4001-00 1101/1191 T102 4002-71 1102 T103 4003-00 1103/1962 T104 4004-71, 4004-20 1104/1962 T105 4005-00S 3121 **T101B** 4001-00V -- T101R 4011-00 1101-0/1191-0 T...

lang:en score:21 filesize: 64.91 K page_count: 1 document date: 2008-02-09

[Intermatic General Catalog - Energy Controls, Lighting, and Pool/Spa Solutions]
Comprehensive catalog from Intermatic detailing their extensive range of energy control products, including weatherproof solutions, professional lighting, pool and spa controls, surge protection, and consumer products. Features detailed product specifications and applications.
lang:en score:21 filesize: 24.52 M page_count: 152 document date: 2007-03-26

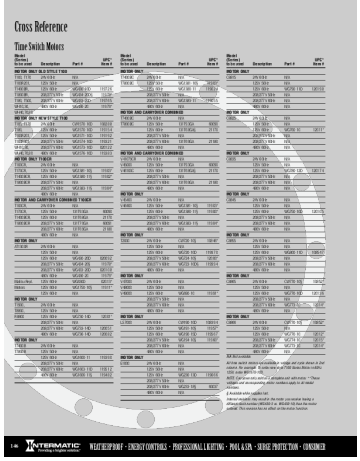

[Intermatic Product Cross-Reference Catalog: Time Switches, Motors, and Controls]
Comprehensive cross-reference guide for Intermatic time switches, motors, weatherproof covers, lighting controls, and photo controls, listing model numbers, descriptions, and part numbers from various manufacturers.
lang:es score:20 filesize: 199.35 K page_count: 6 document date: 2006-01-25

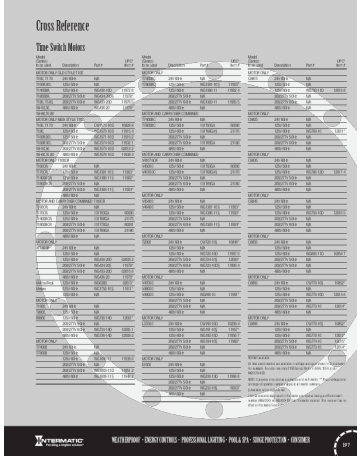

[Intermatic Product Cross Reference Guide: Time Switches, Motors, Lighting, and Controls]
A comprehensive cross-reference guide from Intermatic, detailing model and part number equivalencies for time switches, motors, weatherproof covers, lighting, and photo controls across various manufacturers.
lang:es score:20 filesize: 2.68 M page_count: 7 document date: 2008-03-19

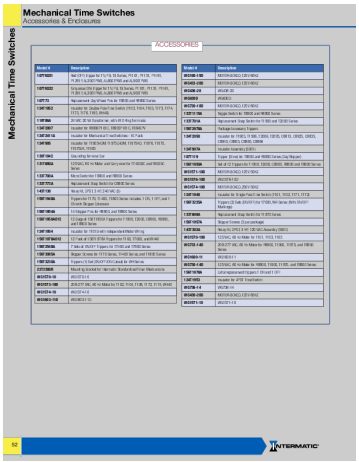

[pdf] Datasheet Accessories

Intermatic 01819 52 CAT assets gordonelectricsupply datasheets ts |||

Mechanical Time Switches Mechanical Time Switches Accessories Enclosures ACCESSORIES Model # 10 ... Series 12 Bags of 156T1950A Trippers for T1900, T2000, C8800, R8800, and T8800 Series Insulator for **T101B** with Independent Motor Wiring 12 Pack of 156T1978A Trippers for T100, T7000, and WH40 7 Sets o...

lang:en score:19 filesize: 50.56 K page_count: 1 document date: 2024-02-10

[pdf]

Intermatic Yursat Markası tedarik süresi için lütfen bizimle iletişime Ej600 · Et2725c Fd60mwc Ei235 Et174c Em1408mc MASTER CONTROL PANEL W 8 RELAY intermatic yursat tr |||

Yursat Di Tic. Mnendislik Yeni Karaman Mah. Sanayi Cad. 4. Kantar Sok. Asya Plaza Kat:5 No:505 Osman ... Ei230la 133et1191a Ff30mc Em14ps Ei500wc Pg100-208-3y W l070mh Pa121 Q -Frw u-240 Fd15mhw P1271f24 **T101b** Rc122b 2t2502ga T174 Ei600wc W p1000hfin T1975r Ff2h Rc2133m C8866 W g79011d Talento-Taxxi-P I...

lang:id score:19 filesize: 386.24 K page_count: 27 document date: 2025-07-21

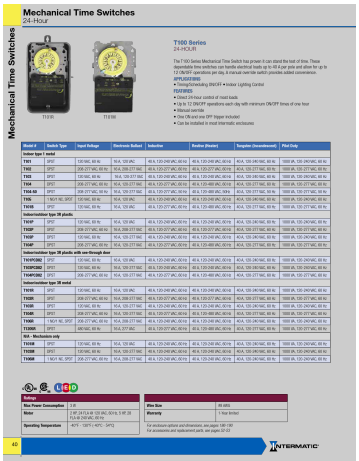

[pdf] User Manual Borchure

Mechanical Time Switches City ElectricT104R DPST 208 277 VAC 60 Hz 16 A 120 Can be installed in most Intermatic enclosures enclosuresintermatic brochure 941623media cityelectricsupply media intermatic t106m documents 941623 |||

Mechanical Time Switches Mechanical Time Switches 24-Hour T101R T101M T100 Series 24-HOUR The T1 ... , 120-240 VAC, 60 Hz 40 A, 120-240 VAC, 60 Hz 40 A, 120-240 VAC, 60 Hz 1000 VA, 120-240 VAC, 60 Hz **T101B** SPST 120 VAC, 60 Hz 16 A, 120 VAC 40 A, 120-277 VAC, 60 Hz 40 A, 120-480 VAC, 60 Hz 40 A, ...

lang:en score:19 filesize: 357.8 K page_count: 2 document date: 2023-08-28

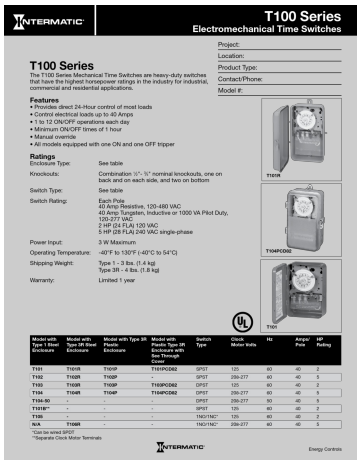

T100 Series
Electromechanical Time Switches

Project:
Location:
Product Type:
Contact/Phone:
Model #:

T100 Series
The T100 Series Mechanical Time Switches are heavy-duty switches that have the highest horsepower ratings in the industry for industrial, commercial and residential applications.

Features
- Provides direct 24-Hour control of most loads
- Control electrical loads up to 40 Amps
- 1 to 12 ON/OFF operations each day
- Minimum ON/OFF times of 1 hour
- Manual override
- All models equipped with one ON and one OFF tripper

Ratings

Enclosure Type:	See table
Knockouts:	Combination ½"- ¾" nominal knockouts, one on back and on each side, and two on bottom
Switch Type:	See table
Switch Rating:	Each Pole 40 Amp Resistive, 120-480 VAC 40 Amp Tungsten, Inductive or 1000 VA Pilot Duty, 120-277 VAC 2 HP (24 FLA) 120 VAC 5 HP (28 FLA) 240 VAC single-phase
Power Input:	3 W Maximum
Operating Temperature:	-40°F to 130°F (-40°C to 54°C)
Shipping Weight:	Type 1 - 3 lbs. (1.4 kg) Type 3R - 4 lbs. (1.8 kg)
Warranty:	Limited 1 year

T101R
T104PCD82
T101

Model with Type 1 Steel Enclosure	Model with Type 3R Steel Enclosure	Model with Type 3R Plastic Enclosure	Model with Plastic Type 3R Enclosure with Clock Through Cover	Switch Type	Clock Motor Volts	Hz	Amper Pole	HP Rating
T101	T101R	T101P	T101PCD82	SPST	125	60	40	2
T102	T102R	T102P	-	2Sw-277	2Sw-277	60	40	5
T103	T103R	T103P	T103PCD82	DPST	125	60	40	2
T104	T104R	T104P	T104PCD82	DPST	2Sw-277	60	40	5
T104-50	-	-	-	DPST	2Sw-277	50	40	5
T101B**	-	-	-	SPST	125	60	40	2
T105	-	-	-	TNO1NC*	125	60	40	2
N/A	T106R	-	-	TNO1NC*	2Sw-277	60	40	5

*Can be wired SPDT
**Separate Clock Motor Terminals

INTERMATIC
Energy Controls

[pdf] User Manual Warranty

192e419884e43d53724a9ddb6db56d7201dc647c media distributordatasolutions intermatic 2018q1 |||

T100 Series Electromechanical Time Switches Project: T100 Series The T100 Series Mechanical Time S ... 2 T102R T102P - T103 T103R T103P T103PCD82 T104 T104R T104P T104PCD82 T104-50 - - - **T101B**** - - - T105 - - - N/A T106R - - *Can be wired SPDT **Separate Clock Motor Termina...

lang:en score:19 filesize: 724.12 K page_count: 2 document date: 2014-11-10

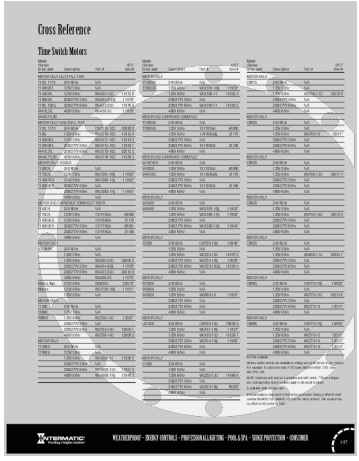

Cross Reference

Time Switch Motors

[pdf]

ts89 goodser Components Intermatic ET8215CR Time Switch 7 Day *** Discontinued PLATT ELECTRIC SUPPLY intermatic cross reference i 56059C4C 0173 4C58 B6DA 814B42623B46 rexel cdn products |||

Cross Reference Time Switch Motors Model Series to be used Description Part # MOTOR ONLY OLD ... 4002-71 1102 T103 4003-00 1103/1962 T104 4004-71, 4004-20 1104/1962 T105 4005-00S 3121 **T101B** 4001-00V -- T101R 4011-00 1101-0/1191-0 T102R 4012-20 -- T103R 4013-00 1103-0/1962-...

lang:es score:19 filesize: 124.95 K page_count: 6 document date: 2014-04-21

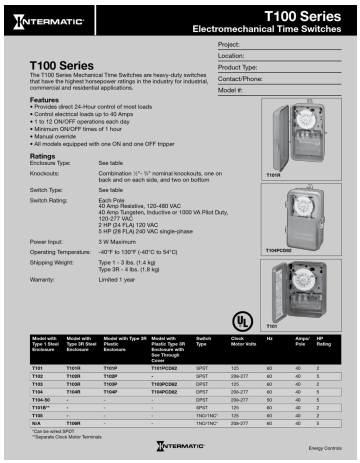

T100 Series
Electromechanical Time Switches

Project:
Location:
Product Type:
Contact/Phone:
Model #:

T100 Series
The T100 Series Mechanical Time Switches are heavy-duty switches that have the highest horsepower ratings in the industry for industrial, commercial and residential applications.

Features
- Provides direct 24-Hour control of most loads
- Control electrical loads up to 40 Amps
- 1 to 12 ON/OFF operations each day
- Minimum ON/OFF times of 1 hour
- Manual override
- All models equipped with one ON and one OFF tripper

Ratings

Enclosure Type:	See table
Knockouts:	Combination ½"- ¾" nominal knockouts, one on back and on each side, and two on bottom
Switch Type:	See table
Switch Rating:	Each Pole 40 Amp Resistive, 120-480 VAC 40 Amp Tungsten, Inductive or 1000 VA Pilot Duty, 120-277 VAC 2 HP (24 FLA) 120 VAC 5 HP (28 FLA) 240 VAC single-phase
Power Input:	3 W Maximum
Operating Temperature:	-40°F to 130°F (-40°C to 54°C)
Shipping Weight:	Type 1 - 3 lbs. (1.4 kg) Type 3R - 4 lbs. (1.8 kg)
Warranty:	Limited 1 year

T101R
T104PCD82
T101

Model with Type 1 Steel Enclosure	Model with Type 3R Steel Enclosure	Model with Type 3R Plastic Enclosure	Model with Plastic Type 3R Enclosure with Clock Through Cover	Switch Type	Clock Motor Volts	Hz	Amper Pole	HP Rating
T101	T101R	T101P	T101PCD82	SPST	125	60	40	2
T102	T102R	T102P	-	2Sw-277	2Sw-277	60	40	5
T103	T103R	T103P	T103PCD82	DPST	125	60	40	2
T104	T104R	T104P	T104PCD82	DPST	2Sw-277	60	40	5
T104-50	-	-	-	DPST	2Sw-277	50	40	5
T101B**	-	-	-	SPST	125	60	40	2
T105	-	-	-	TNO1NC*	125	60	40	2
N/A	T106R	-	-	TNO1NC*	2Sw-277	60	40	5

*Can be wired SPDT
**Separate Clock Motor Terminals

INTERMATIC
Energy Controls

[pdf] User Manual Warranty

T104P201 INTERMATIC INCORPORATED Intermatic 208 277V DPST 40 Amps Mechanical Time Switch Fireman Cinderella Inc t100 spec 2 portal cinderellainc customer docs skudocs |||

T100 Series Electromechanical Time Switches Project: T100 Series The T100 Series Mechanical Time S ... 2 T102R T102P - T103 T103R T103P T103PCD82 T104 T104R T104P T104PCD82 T104-50 - - - **T101B**** - - - T105 - - - N/A T106R - - *Can be wired SPDT **Separate Clock Motor Termina...

lang:en score:19 filesize: 721.24 K page_count: 2 document date: 2018-11-27

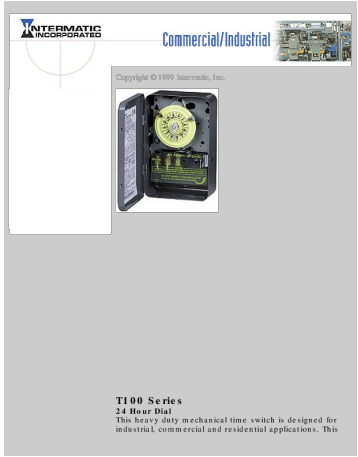

[pdf] Specifications

Intermatic Incorporated Commercial Industrial T100 Series Mechanical Time Switch Specifications 24 Hr Timer Multiple Settings NEMA 3R Enclosure Outdoor USABlueBook 45010 450102 usabluebook product attachment |||

Copyright 1999 Intermatic, Inc. T100 Series 24 Hour Dial This heavy duty mechanical time switch is ... 8-277 40 5 T103 T103P T103PCD82 DPST 125 40 2 T104 T104P T104PCD82 DPST 208-277 40 5 **T101B*** --- --- SPST 125 40 2 T102B* --- --- SPST 208-277 40 5 T105 --- --- 1NO/1NC...

lang:en score:19 filesize: 76.28 K page_count: 4 document date: 2001-06-28

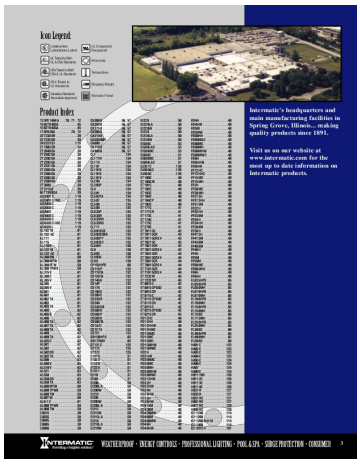

[pdf] Warranty Catalog

Intermatic General Catalog Paul Dulberg TS89 Index intermatic 80 images catalog groups

Icon Legend: Underwriters Laboratories Listed UL Tested to Both UL CSA Standards CSA Tested to Bot ... .78 T10004RT3 . . . . . .78 T101 . . . . . .26 T10101R . . . . . .74 **T101B** . . . . . .26 T101P . . . . . .26 T101R . . . . . .26 T102...

lang:i-klingon score:18 filesize: 225.27 K page_count: 2 document date: 2007-01-23

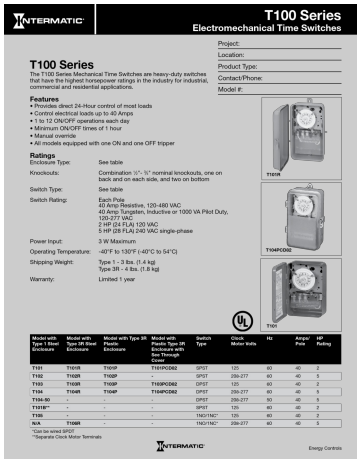

[pdf] User Manual Specifications Warranty

T100 Series Specs sku 897 T104M201 assets poolweb products Intermatic |||

T100 Series Electromechanical Time Switches Project: T100 Series The T100 Series Mechanical Time S ... 2 T102R T102P - T103 T103R T103P T103PCD82 T104 T104R T104P T104PCD82 T104-50 - - - **T101B**** - - - T105 - - - N/A T106R - - *Can be wired SPDT **Separate Clock Motor Termina...

lang:en score:18 filesize: 688.31 K page_count: 2 document date: 2016-01-28

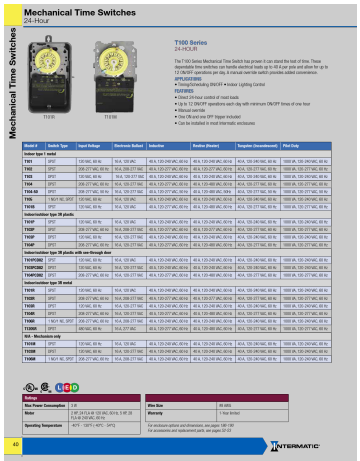

[pdf] User Manual Borchure

Download Product Brochure Intermatic T101 24 Hour Mechanical Time Switch 120 VAC 60Hz SPST 1 Interval intermatic brochure 4717 media cityelectricsupply t101 documents |||

Mechanical Time Switches Mechanical Time Switches 24-Hour T101R T101M T100 Series 24-HOUR The T1 ... , 120-240 VAC, 60 Hz 40 A, 120-240 VAC, 60 Hz 40 A, 120-240 VAC, 60 Hz 1000 VA, 120-240 VAC, 60 Hz **T101B** SPST 120 VAC, 60 Hz 16 A, 120 VAC 40 A, 120-277 VAC, 60 Hz 40 A, 120-480 VAC, 60 Hz 40 A, ...

lang:en score:18 filesize: 196.58 K page_count: 1 document date: 2022-08-17

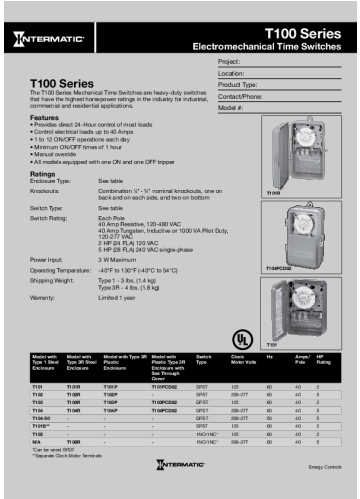

[pdf] User Manual Specifications Warranty

Specification Sheet Intermatic T104 INTT101 1 southernpipe ASSETS DOCUMENTS CMS EN |||

T100 Series Electromechanical Time Switches Project: T100 Series The T100 Series Mechanical Time S ... 2 T102R T102P - T103 T103R T103P T103PCD82 T104 T104R T104P T104PCD82 T104-50 - - - **T101B**** - - - T105 - - - N/A T106R - - *Can be wired SPDT **Separate Clock Motor Termina...

lang:en score:18 filesize: 127.91 K page_count: 2 document date: 2015-01-10

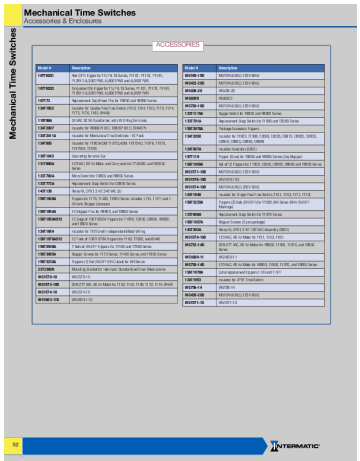

[pdf] Accessories

Manufacturer Spec Sheet INT MAT 156T3085A SKIPPER SCREW 3PK Gordon Electric Supply Inc Intermatic 00628 52 CAT images tradeservice 9ETBOIYK8205G6UU ATTACHMENTS DIR100361 |||

Mechanical Time Switches Mechanical Time Switches Accessories Enclosures ACCESSORIES Model # 10 ... Series 12 Bags of 156T1950A Trippers for T1900, T2000, C8800, R8800, and T8800 Series Insulator for **T101B** with Independent Motor Wiring 12 Pack of 156T1978A Trippers for T100, T7000, and WH40 7 Sets o...

lang:en score:18 filesize: 50.56 K page_count: 1 document date: 2022-04-11

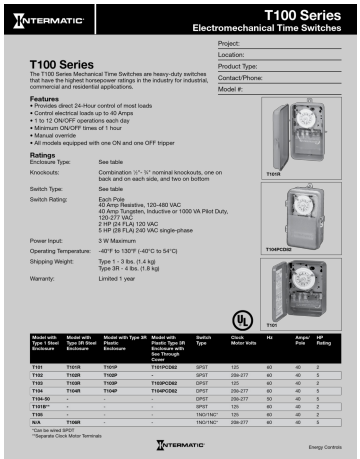

[pdf] User Manual Warranty Catalog

timer auto p100 cp Catalog Page T101 pim galco Manufacturer Intermatic TechDocument |||

T100 Series Electromechanical Time Switches Project: T100 Series The T100 Series Mechanical Time S ... 2 T102R T102P - T103 T103R T103P T103PCD82 T104 T104R T104P T104PCD82 T104-50 - - - **T101B**** - - - T105 - - - N/A T106R - - *Can be wired SPDT **Separate Clock Motor Termina...

lang:en score:18 filesize: 719.18 K page_count: 2 document date: 2017-05-12

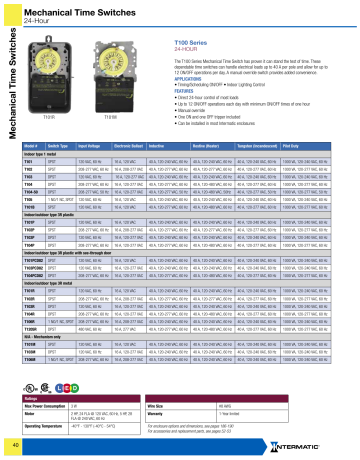

[pdf] User Manual Borchure

Mechanical Time Switches City ElectricT101R T101M Model Switch Type Input Voltage T101R SPST 120 VAC 60 Hz 16 A 40 Can be installed in most Intermatic enclosuresintermatic brochure 4738media cityelectricsupply media intermatic t103 documents 4738 |||

Mechanical Time Switches Mechanical Time Switches 24-Hour T101R T101M T100 Series 24-HOUR The T1 ... , 120-240 VAC, 60 Hz 40 A, 120-240 VAC, 60 Hz 40 A, 120-240 VAC, 60 Hz 1000 VA, 120-240 VAC, 60 Hz **T101B** SPST 120 VAC, 60 Hz 16 A, 120 VAC 40 A, 120-277 VAC, 60 Hz 40 A, 120-480 VAC, 60 Hz 40 A, ...

lang:en score:18 filesize: 196.58 K page_count: 1 document date: 2022-08-17

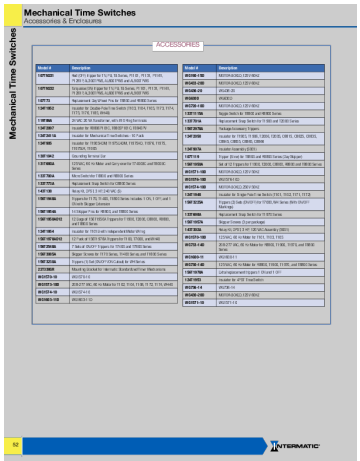

Mechanical Time Switches
Accessories & Enclosures

ACCESSORIES

Model #	Description
10T10B2	Relé DPDT Trigger Kit T1/T6/T8 Series, P11B, P11B, P11B1, P11B11 & BLDR1P100, AUBL1P100 and AUBR1P100
10T10B3	Relé Quad DPDT Trigger Kit T1/T6/T8 Series, P11B, P11B, P11B1, P11B11 & BLDR1P100, AUBL1P100 and AUBR1P100
10T11	Replacement Stop/Reset Pins for T8B100 and WH8B Series
10T1B12	Insulator for Double Pole Switch Rating (T103, T104, T105, T1T3, T1T4, T1T5, T1T6, T1B1, BH40)
11W1B6A	24 VAC, 50/60 Insulator for with Rating Series Insulator
12AT2B6T	Insulator for WH8B/T8 (B), WH8B/T8B (C), B8B8/T8
12AT3B1.5	Insulator for Manufactured Tank Series - 30" Pack
12AT4B5	Insulator for T1B/CH/CH8B/T1B/TC/CH8B, T1B/TC/, T1B/TS, T1B/TS2, T1B/B2, T1B/B3
1-12T1B4.2	Clear Indicator Screw Cap
1-12T1B8A	T2T/T4/C, AC to Motor and Carry-over for T2/AC/B2, and T8B/B2/C Series
1-12T7B3A	Micro Controller T8B/B2 and WH8B Series
1-12T7C4	Replacement Stop Switch for C8B/B Series
1-4T1-1B	Relay AL 2PDT 2 1/4" 24 VAC, (2)
1-12T1B4B3	Trippers for T1/T5, T1-4B2, T1B2/C Series includes 1 CPL 1 1/2T1, and 2 - 15 inch Stripper Extension
1-12T1B4B4	1/4 Stripper Pins for WH8B/C and T8B/C Series
1-12T1B4B4/12	1/2 Stripper T1B/T1B2/CH Trippers for T1B2B, C8B2B, C8B8B, WH8B, and T8B2 Series
1-12T1B1B4	Insulator for T8B/C/B with Independent Motor Wiring
1-12T1B1B4/12	1/2 Pack of 1 B/T2/B/C B/T8/B Trippers for T1-B2, T2B2B, and WH40
1-12T2B1B6	2 Pack of 24 VDT Trippers for T1/B2 and T1B2/C Series
1-12T2B1B6	Stripper Screws for T1/T2 Series, T1/B2 Series, and T1B2/C Series
1-12T3B1B6	Trippers 3 Pack 24 VDT 2PDT, Latch for 24 Volt Series
2-2T1B3B6	Mount to Unit Adapter Intermatic Brackets and Inner Mechanisms
20-2T2T3-1-10	20-2T2T3-1-10
20-2T2T3-1-100	20-2T2T3 VAC, 60 Hz Motor for T1-B2, T1T3, T1B, T1-T5, T1-T6, BH40
20-2T3T4-1-10	20-2T3T4-1-10
20-2T4B1-1-10	20-2T4B1-1-10
20-2T4B1-1-100	20-2T4B1 VAC, 60 Hz Motor for T1-B2, T1T3, T1B, T1-T5, T1-T6, BH40
20-2T4B1-1-10	20-2T4B1-1-10
20-2T4B1-1-100	20-2T4B1 VAC, 60 Hz Motor for T1-B2, T1T3, T1B, T1-T5, T1-T6, BH40
20-2T4B1-1-10	20-2T4B1-1-10
20-2T4B1-1-100	20-2T4B1 VAC, 60 Hz Motor for T1-B2, T1T3, T1B, T1-T5, T1-T6, BH40
20-2T4B1-1-10	20-2T4B1-1-10

Model #	Description
20-2T4B1-1-100	20-2T4B1 VAC, 60 Hz Motor for T1-B2, T1T3, T1B, T1-T5, T1-T6, BH40
20-2T4B1-1-10	20-2T4B1-1-10
20-2T4B1-1-100	20-2T4B1 VAC, 60 Hz Motor for T1-B2, T1T3, T1B, T1-T5, T1-T6, BH40
20-2T4B1-1-10	20-2T4B1-1-10
20-2T4B1-1-100	20-2T4B1 VAC, 60 Hz Motor for T1-B2, T1T3, T1B, T1-T5, T1-T6, BH40
20-2T4B1-1-10	20-2T4B1-1-10
20-2T4B1-1-100	20-2T4B1 VAC, 60 Hz Motor for T1-B2, T1T3, T1B, T1-T5, T1-T6, BH40
20-2T4B1-1-10	20-2T4B1-1-10
20-2T4B1-1-100	20-2T4B1 VAC, 60 Hz Motor for T1-B2, T1T3, T1B, T1-T5, T1-T6, BH40
20-2T4B1-1-10	20-2T4B1-1-10
20-2T4B1-1-100	20-2T4B1 VAC, 60 Hz Motor for T1-B2, T1T3, T1B, T1-T5, T1-T6, BH40
20-2T4B1-1-10	20-2T4B1-1-10
20-2T4B1-1-100	20-2T4B1 VAC, 60 Hz Motor for T1-B2, T1T3, T1B, T1-T5, T1-T6, BH40
20-2T4B1-1-10	20-2T4B1-1-10
20-2T4B1-1-100	20-2T4B1 VAC, 60 Hz Motor for T1-B2, T1T3, T1B, T1-T5, T1-T6, BH40
20-2T4B1-1-10	20-2T4B1-1-10

Mechanical Time Switches

62 INTERMATIC

[pdf] Accessories

Mechanical Time SwitchesTurquoise ON tripper for TN PB TB Series P1101 P1131 P1161 P1261P Mounting Bracket Intermatic Standardized Timer Mechanisms WG1570 10Intermatic 00628 52 CATmedia distributordatasolutions xlsx trimble 2023q4 documents 5dd940109fc857156700bb4326248ddb5e96201f |||

Mechanical Time Switches Mechanical Time Switches Accessories Enclosures ACCESSORIES Model # 10 ... Series 12 Bags of 156T1950A Trippers for T1900, T2000, C8800, R8800, and T8800 Series Insulator for **T101B** with Independent Motor Wiring 12 Pack of 156T1978A Trippers for T100, T7000, and WH40 7 Sets o...

lang:en score:18 filesize: 50.56 K page_count: 1 document date: 2022-04-11

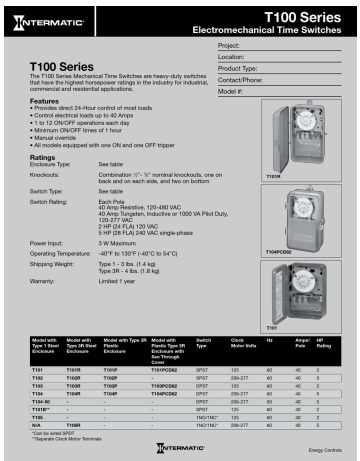

INTERMATIC

T100 Series
Electromechanical Time Switches

Project:
Location:
Product Type:
Contact/Phone:
Model #:

T100 Series

The T100 Series Mechanical Time Switches are heavy-duty switches that have the highest horsepower ratings in the industry for industrial, commercial and residential applications.

Features
- Provides direct 24-Hour control of most loads
- Control electrical loads up to 40 Amps
- 1 to 12 ON/OFF operations each day
- Minimum ON/OFF times of 1 hour
- Manual override
- All models equipped with one ON and one OFF tripper

Ratings

Enclosure Type:	See table
Knockouts:	Combination ½"- ¾" nominal knockouts, one on back and on each side, and two on bottom
Switch Type:	See table
Switch Rating:	Each Pole 40 Amp Resistive, 120-480 VAC 40 Amp Tungsten, Inductive or 1000 VA Pilot Duty, 120-277 VAC 2 HP (24 FLA) 120 VAC 5 HP (28 FLA) 240 VAC single-phase
Power Input:	3 W Maximum
Operating Temperature:	-40°F to 130°F (-40°C to 54°C)
Shipping Weight:	Type 1 - 3 lbs. (1.4 kg) Type 3R - 4 lbs. (1.8 kg)
Warranty:	Limited 1 year

T101R

T104PCD82

T101

Model with Type 1 Steel Enclosure	Model with Type 3R Steel Enclosure	Model with Type 3R Plastic Enclosure	Model with Plastic Type 3R Enclosure with See Through Cover	Switch Type	Clock Motor Volts	Hz	Amps/ Pole	HP Rating
T101	T101R	T101P	T101PCD82	SPST	125	60	40	2
T102	T102R	T102P	-	SPST	208-277	60	40	5
T103	T103R	T103P	T103PCD82	DPST	125	60	40	2
T104	T104R	T104P	T104PCD82	DPST	208-277	60	40	5
T104-50	-	-	-	DPST	208-277	50	40	5
T101B**	-	-	-	SPST	125	60	40	2
T105	-	-	-	TNO/1NC*	125	60	40	2
N/A	T106R	-	-	TNO/1NC*	208-277	60	40	3

*Can be wired SPDT
**Separate Clock Motor Terminals

INTERMATIC Energy Controls

[pdf] User Manual Specifications Decleration of Conformity Warranty

T100 Series content interlinebrands Unilog Content Solutions Cesco Manual override All models equipped with one ON and OFF tripper Ratings Enclosure Type See table Knockouts Combination 1⁄2 3⁄4 nominal knockouts on back each side two bottom Switch Rating Each Pole 40 Amp Resistive 120 480 VAC Tungsten Inductive or 1000 VA Pilot Duty 601501 SpecSheet IDW DOCUMENT eb66df5f76e541884a19d7969b46a626ce4cad0bde04a63701ead39b8f18a8bb SPE 003 2pgs product document 10146 assets unilogcorp 2 ITEM DOC cesco resources 42A

T100 Series Electromechanical Time Switches Project: T100 Series The T100 Series Mechanical Time S ... 2 T102R T102P - T103 T103R T103P T103PCD82 T104 T104R T104P T104PCD82 T104-50 - - - **T101B**** - - - T105 - - - N/A T106R - - *Can be wired SPDT **Separate Clock Motor Termina...

lang:en score:17 filesize: 933.69 K page_count: 2 document date: 2011-09-19

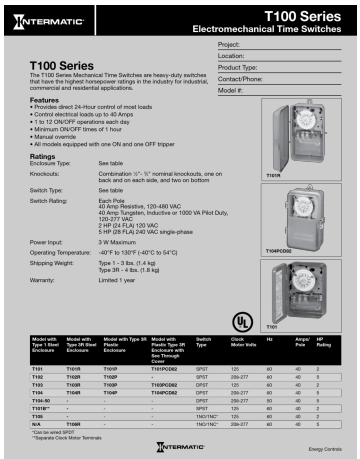

INTERMATIC

T100 Series
Electromechanical Time Switches

Project:
Location:
Product Type:
Contact/Phone:
Model #:

T100 Series

The T100 Series Mechanical Time Switches are heavy-duty switches that have the highest horsepower ratings in the industry for industrial, commercial and residential applications.

Features
- Provides direct 24-Hour control of most loads
- Control electrical loads up to 40 Amps
- 1 to 12 ON/OFF operations each day
- Minimum ON/OFF times of 1 hour
- Manual override
- All models equipped with one ON and one OFF tripper

Ratings

Enclosure Type:	See table
Knockouts:	Combination ½"- ¾" nominal knockouts, one on back and on each side, and two on bottom
Switch Type:	See table
Switch Rating:	Each Pole 40 Amp Resistive, 120-480 VAC 40 Amp Tungsten, Inductive or 1000 VA Pilot Duty, 120-277 VAC 2 HP (24 FLA) 120 VAC 5 HP (28 FLA) 240 VAC single-phase
Power Input:	3 W Maximum
Operating Temperature:	-40°F to 130°F (-40°C to 54°C)
Shipping Weight:	Type 1 - 3 lbs. (1.4 kg) Type 3R - 4 lbs. (1.8 kg)
Warranty:	Limited 1 year

T101R

T104PCD82

T101

Model with Type 1 Steel Enclosure	Model with Type 3R Steel Enclosure	Model with Type 3R Plastic Enclosure	Model with Plastic Type 3R Enclosure with See Through Cover	Switch Type	Clock Motor Volts	Hz	Amps/ Pole	HP Rating
T101	T101R	T101P	T101PCD82	SPST	125	60	40	2
T102	T102R	T102P	-	SPST	208-277	60	40	5
T103	T103R	T103P	T103PCD82	DPST	125	60	40	2
T104	T104R	T104P	T104PCD82	DPST	208-277	60	40	5
T104-50	-	-	-	DPST	208-277	50	40	5
T101B**	-	-	-	SPST	125	60	40	2
T105	-	-	-	TNO/1NC*	125	60	40	2
N/A	T106R	-	-	TNO/1NC*	208-277	60	40	5

*Can be wired SPDT
**Separate Clock Motor Terminals

INTERMATIC Energy Controls

[pdf] User Manual Specifications Warranty

SpecificationsMechanical Time Switch Mechanism Only 125V DPST Intermatic T103MT100 Series Specsassets poolweb products T100 Specs sku 897 T103M |||

T100 Series Electromechanical Time Switches Project: T100 Series The T100 Series Mechanical Time S ... 2 T102R T102P - T103 T103R T103P T103PCD82 T104 T104R T104P T104PCD82 T104-50 - - - **T101B**** - - - T105 - - - N/A T106R - - *Can be wired SPDT **Separate Clock Motor Termina...

lang:en score:17 filesize: 688.31 K page_count: 2 document date: 2016-01-28

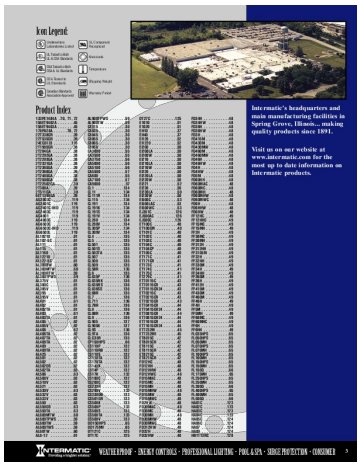

[pdf] Warranty Catalog

Layout 1 2006 TS89 Index intermatic images catalog groups

Icon Legend: Underwriters Laboratories Listed UL Tested to Both UL CSA Standards CSA Tested to Bot ... . .78 T10004RT3 . . . . . .78 T101 . . . . . .26 T10101R . . . . . .74 **T101B** . . . . . .26 T101P . . . . . .26 T101R . . . . . .26 T102 . . ....

lang:i-klingon score:17 filesize: 221.83 K page_count: 2 document date: 2006-01-13

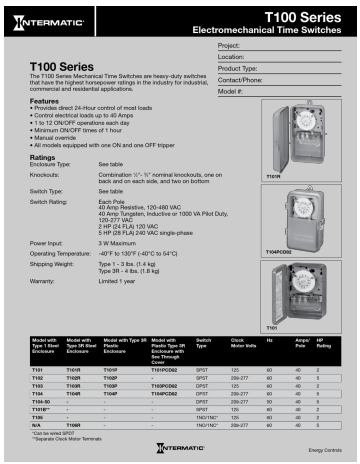

[pdf] User Manual Specifications Warranty

Untitled Specification Sheet Intermatic T103R T100 Series Mechanical Time Switch Gray DPST Graybar Store cb8cfa8f3136f646092fc7553dac376f99f23e7b images salsify image upload s s7wh0hfw |||

T100 Series Electromechanical Time Switches Project: T100 Series The T100 Series Mechanical Time S ... 2 T102R T102P - T103 T103R T103P T103PCD82 T104 T104R T104P T104PCD82 T104-50 - - - **T101B**** - - - T105 - - - N/A T106R - - *Can be wired SPDT **Separate Clock Motor Termina...

lang:en score:17 filesize: 270.53 K page_count: 2 document date: 2020-03-08

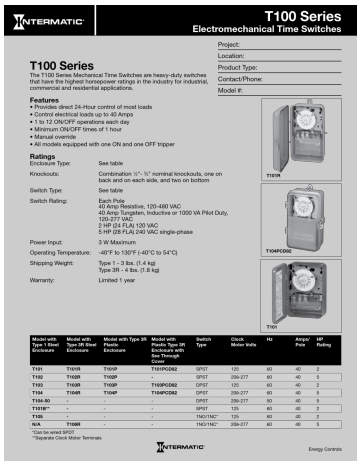

[pdf] User Manual Specifications Warranty

Untitled Specification Sheet Intermatic T102 Mechanical Time Switch T100 Series 125V SPST Graybar Store 2cbad91e557c24588bbac1fffdb7cf533d907d9a images salsify image upload s b86U R3T |||

T100 Series Electromechanical Time Switches Project: T100 Series The T100 Series Mechanical Time S ... 2 T102R T102P - T103 T103R T103P T103PCD82 T104 T104R T104P T104PCD82 T104-50 - - - **T101B**** - - - T105 - - - N/A T106R - - *Can be wired SPDT **Separate Clock Motor Termina...

lang:en score:17 filesize: 270.53 K page_count: 2 document date: 2020-03-08

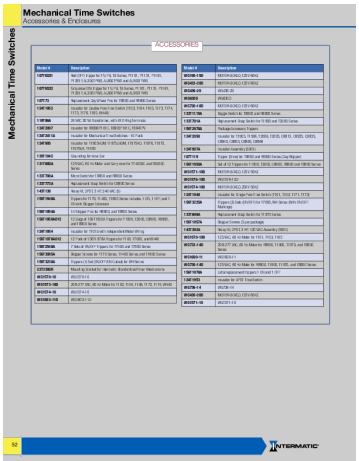

[pdf] Datasheet Accessories

Mechanical Time Switches SwitchesMounting Bracket for Intermatic Standardized Timer Mechanisms WG1570 10 WG1603 11D Model Description WG190 15D MOTOR BOXED 125V 60HZIntermatic 01602 52 78 182 CATassets gordonelectricsupply datasheets ts CAT |||

Mechanical Time Switches Mechanical Time Switches Accessories Enclosures ACCESSORIES Model # 10 ... Series 12 Bags of 156T1950A Trippers for T1900, T2000, C8800, R8800, and T8800 Series Insulator for **T101B** with Independent Motor Wiring 12 Pack of 156T1978A Trippers for T100, T7000, and WH40 7 Sets o...

lang:en score:17 filesize: 622.43 K page_count: 3 document date: 2023-12-12

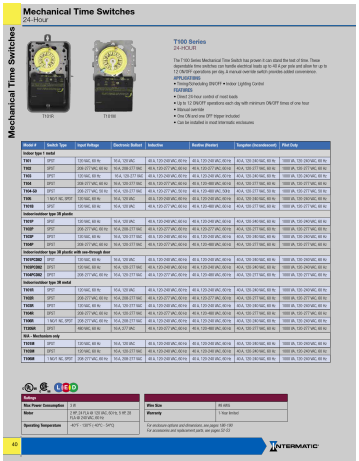

[pdf] User Manual Catalog

Catalog Page T101 INT SPST TIME SW Kendall Electric Inc Intermatic 01819 40 CAT images tradeservice 67RP0R567XIGR4O8 ATTACHMENTS DIR100458 |||

Mechanical Time Switches Mechanical Time Switches 24-Hour T101R T101M T100 Series 24-HOUR The T1 ... , 120-240 VAC, 60 Hz 40 A, 120-240 VAC, 60 Hz 40 A, 120-240 VAC, 60 Hz 1000 VA, 120-240 VAC, 60 Hz **T101B** SPST 120 VAC, 60 Hz 16 A, 120 VAC 40 A, 120-277 VAC, 60 Hz 40 A, 120-480 VAC, 60 Hz 40 A, ...

lang:en score:17 filesize: 196.58 K page_count: 1 document date: 2024-02-10

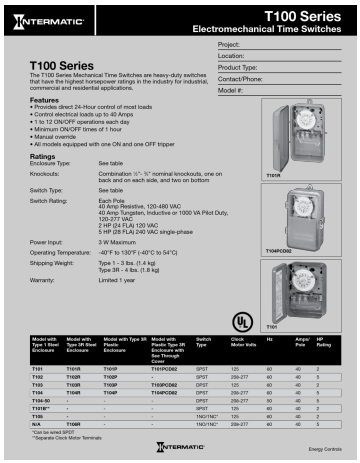

[pdf] User Manual Warranty

Spec Sheet Intermatic T101P 24 Hour Mechanical Time Switch 120 VAC SPST Indoor Outdoor Plastic Enclosure 1 Interval 3d72c6362cd48978c82e62f8cd56e195 4114 1702919610120 media distributordatasolutions pim file |||

T100 Series Electromechanical Time Switches Project: T100 Series The T100 Series Mechanical Time S ... 2 T102R T102P - T103 T103R T103P T103PCD82 T104 T104R T104P T104PCD82 T104-50 - - - **T101B**** - - - T105 - - - N/A T106R - - *Can be wired SPDT **Separate Clock Motor Termina...

lang:en score:17 filesize: 724.16 K page_count: 2 document date: 2014-11-10

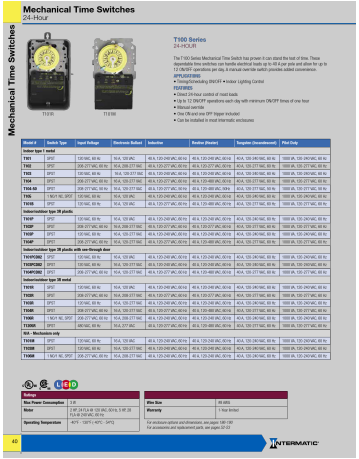

Mechanical Time Switches
24-Hour

Mechanical Time Switches

T100 Series
24-HOUR

The T100 Series Mechanical Time Switch has proven it can stand the test of time. These dependable time switches can handle electrical loads up to 40 A per pole and allow for up to 12 ON/OFF operations per day. A manual override switch provides added convenience.

APPLICATIONS
• Timing/Scheduling ON/OFF • Indoor Lighting Control

FEATURES
• Direct 24-hour control of load loads
• Up to 12 ON/OFF operations each day with minimum ON/OFF times of one hour
• Manual override
• One ON and one OFF trigger included
• Can be installed in most intermatic enclosures

T101B T101M

Model #	Switch Type	Input Voltage	Electronic Ballast	Inductive	Resistive (Heater)	Tungsten (Incandescent)	Pilot Duty
Indoor type 1 metal							
T101	SPST	120 VAC, 60 Hz	16 A, 120 VAC	40 A, 120-240 VAC, 60 Hz	40 A, 120-240 VAC, 60 Hz	40 A, 120-240 VAC, 60 Hz	1000 VA, 120-240 VAC, 60 Hz
T102	DPST	208-277 VAC, 60 Hz	16 A, 208-277 VAC	40 A, 120-277 VAC, 60 Hz	40 A, 120-277 VAC, 60 Hz	40 A, 120-277 VAC, 60 Hz	1000 VA, 120-277 VAC, 60 Hz
T103	DPST	120 VAC, 60 Hz	16 A, 120-277 VAC	40 A, 120-240 VAC, 60 Hz	40 A, 120-240 VAC, 60 Hz	40 A, 120-240 VAC, 60 Hz	1000 VA, 120-240 VAC, 60 Hz
T104	DPST	208-277 VAC, 60 Hz	16 A, 120-277 VAC	40 A, 120-277 VAC, 60 Hz	40 A, 120-480 VAC, 60 Hz	40 A, 120-277 VAC, 60 Hz	1000 VA, 120-277 VAC, 60 Hz
T104-SB	DPST	208-277 VAC, 60 Hz	16 A, 120-277 VAC	40 A, 120-277 VAC, 30 Hz	40 A, 120-480 VAC, 30Hz	40 A, 120-277 VAC, 60 Hz	1000 VA, 120-277 VAC, 60 Hz
T105	1 N.O/1 NC, SPST	120 VAC, 60 Hz	16 A, 120 VAC	40 A, 120-240 VAC, 60 Hz	40 A, 120-240 VAC, 60 Hz	40 A, 120-240 VAC, 60 Hz	1000 VA, 120-240 VAC, 60 Hz
T107B	SPST	120 VAC, 60 Hz	16 A, 120 VAC	40 A, 120-277 VAC, 60 Hz	40 A, 120-480 VAC, 60 Hz	40 A, 120-277 VAC, 60 Hz	1000 VA, 120-277 VAC, 60 Hz
Indoor/outdoor type 3R plastic							
T101P	SPST	120 VAC, 60 Hz	16 A, 120 VAC	40 A, 120-240 VAC, 60 Hz	40 A, 120-240 VAC, 60 Hz	40 A, 120-240 VAC, 60 Hz	1000 VA, 120-240 VAC, 60 Hz
T102P	DPST	208-277 VAC, 60 Hz	16 A, 208-277 VAC	40 A, 120-277 VAC, 60 Hz	40 A, 120-277 VAC, 60 Hz	40 A, 120-277 VAC, 60 Hz	1000 VA, 120-277 VAC, 60 Hz
T103P	DPST	120 VAC, 60 Hz	16 A, 120-277 VAC	40 A, 120-240 VAC, 60 Hz	40 A, 120-240 VAC, 60 Hz	40 A, 120-240 VAC, 60 Hz	1000 VA, 120-240 VAC, 60 Hz
T104P	DPST	208-277 VAC, 60 Hz	16 A, 120-277 VAC	40 A, 120-277 VAC, 60 Hz	40 A, 120-480 VAC, 60 Hz	40 A, 120-277 VAC, 60 Hz	1000 VA, 120-277 VAC, 60 Hz
Indoor/outdoor type 3R plastic with one-through door							
T101PCBU	SPST	120 VAC, 60 Hz	16 A, 120 VAC	40 A, 120-240 VAC, 60 Hz	40 A, 120-240 VAC, 60 Hz	40 A, 120-240 VAC, 60 Hz	1000 VA, 120-240 VAC, 60 Hz
T101PCBM	SPST	120 VAC, 60 Hz	16 A, 120-277 VAC	40 A, 120-240 VAC, 60 Hz	40 A, 120-240 VAC, 60 Hz	40 A, 120-240 VAC, 60 Hz	1000 VA, 120-240 VAC, 60 Hz
T104PCBM	DPST	208-277 VAC, 60 Hz	16 A, 120-277 VAC	40 A, 120-277 VAC, 60 Hz	40 A, 120-480 VAC, 60 Hz	40 A, 120-277 VAC, 60 Hz	1000 VA, 120-277 VAC, 60 Hz
Indoor/outdoor type 3R metal							
T101R	SPST	120 VAC, 60 Hz	16 A, 120 VAC	40 A, 120-240 VAC, 60 Hz	40 A, 120-240 VAC, 60 Hz	40 A, 120-240 VAC, 60 Hz	1000 VA, 120-240 VAC, 60 Hz
T102R	DPST	208-277 VAC, 60 Hz	16 A, 208-277 VAC	40 A, 120-277 VAC, 60 Hz	40 A, 120-277 VAC, 60 Hz	40 A, 120-277 VAC, 60 Hz	1000 VA, 120-277 VAC, 60 Hz
T103R	DPST	120 VAC, 60 Hz	16 A, 120-277 VAC	40 A, 120-240 VAC, 60 Hz	40 A, 120-240 VAC, 60 Hz	40 A, 120-240 VAC, 60 Hz	1000 VA, 120-240 VAC, 60 Hz
T104R	DPST	208-277 VAC, 60 Hz	16 A, 120-277 VAC	40 A, 120-277 VAC, 60 Hz	40 A, 120-480 VAC, 60 Hz	40 A, 120-277 VAC, 60 Hz	1000 VA, 120-277 VAC, 60 Hz
T105R	1 N.O/1 NC, SPST	208-277 VAC, 60 Hz	16 A, 208-277 VAC	40 A, 120-240 VAC, 60 Hz	40 A, 120-240 VAC, 60 Hz	40 A, 120-240 VAC, 60 Hz	1000 VA, 120-240 VAC, 60 Hz
T106R	1 N.O/1 NC, DPST	208-277 VAC, 60 Hz	16 A, 208-277 VAC	40 A, 120-277 VAC, 60 Hz	40 A, 120-277 VAC, 60 Hz	40 A, 120-277 VAC, 60 Hz	1000 VA, 120-277 VAC, 60 Hz
SPA - Mechanism only							
T101S	SPST	120 VAC, 60 Hz	16 A, 120 VAC	40 A, 120-240 VAC, 60 Hz	40 A, 120-240 VAC, 60 Hz	40 A, 120-240 VAC, 60 Hz	1000 VA, 120-240 VAC, 60 Hz
T103S	DPST	120 VAC, 60 Hz	16 A, 120-277 VAC	40 A, 120-240 VAC, 60 Hz	40 A, 120-240 VAC, 60 Hz	40 A, 120-240 VAC, 60 Hz	1000 VA, 120-240 VAC, 60 Hz
T106S	1 N.O/1 NC, DPST	208-277 VAC, 60 Hz	16 A, 208-277 VAC	40 A, 120-277 VAC, 60 Hz	40 A, 120-277 VAC, 60 Hz	40 A, 120-277 VAC, 60 Hz	1000 VA, 120-277 VAC, 60 Hz

Ratings	
Max Power Consumption	3 W
Motor	2 HP, 277 A @ 120 VAC, 50 Hz; 3 HP, 28 FLA @ 240 VAC, 50 Hz
Operating Temperature	40°F - 130°F (-40°C - 54°C)

Wire Size	#8 AWG
Warranty	1 Year limited

For enclosure options and dimensions, see pages 126-130
For accessories and replacement parts, see pages 32-33

40 INTERMATIC

[pdf] User Manual Datasheet

Manufacturer Spec SheetIntermatic T102 Nema 1 208 277V Spst Gordon Electric Supply IncIntermatic 01819 40 CATassets gordonelectricsupply datasheets ts Intermatic CAT |||

Mechanical Time Switches Mechanical Time Switches 24-Hour T101R T101M T100 Series 24-HOUR The T1 ... , 120-240 VAC, 60 Hz 40 A, 120-240 VAC, 60 Hz 40 A, 120-240 VAC, 60 Hz 1000 VA, 120-240 VAC, 60 Hz **T101B** SPST 120 VAC, 60 Hz 16 A, 120 VAC 40 A, 120-277 VAC, 60 Hz 40 A, 120-480 VAC, 60 Hz 40 A, ... lang:en score:17 filesize: 196.58 K page_count: 1 document date: 2024-02-10