

LEMEGA PR2

LEMEGA PR2 Portable DAB/DAB+ and FM Digital Radio User Manual

Model: PR2 | Brand: LEMEGA

1. INTRODUCTION

This user manual provides comprehensive instructions for the operation and maintenance of your LEMEGA PR2 Portable DAB/DAB+ and FM Digital Radio. Please read this manual thoroughly before using the device to ensure proper functionality and to maximize your listening experience.

The LEMEGA PR2 is designed to deliver superior quality sound from your favorite DAB, DAB+, and FM stations. It features easy setup with quick auto-scanning, allowing you to store up to 60 preset stations (30 DAB/30 FM). Its portable design allows for both mains and battery power options, making it suitable for various environments. Additional features include a headphone output for private listening, dual alarm clocks with snooze function, and an automatically setting time and date from radio stations.



Figure 1.1: LEMEGA PR2 Portable DAB/DAB+ and FM Digital Radio (Walnut)

2. WHAT'S IN THE BOX

Upon unboxing your LEMEGA PR2 radio, please ensure all components listed below are present and in good condition:

- LEMEGA PR2 Portable DAB/DAB+ and FM Digital Radio
- 1 x Power Adapter (UK mains plug)
- 1 x USB Cord
- 1 x Quick Start Guide
- 1 x Owner's Manual (this document)

Figure 2.1: LEMEGA PR2 in various usage scenarios

3. SETUP

3.1 Powering the Radio

The LEMEGA PR2 can be powered either by mains electricity or by batteries, offering flexibility for portable use.

1. **Mains Power:** Connect the provided USB cord to the radio's USB port and the power adapter. Plug the power adapter into a standard UK mains socket.
2. **Battery Power:** For portable use, insert 4 x AAA batteries (not included) into the battery compartment located on the rear of the radio. Please note that AAA batteries typically provide 3-4 hours of playtime. For energy efficiency and reduced waste, it is recommended to use rechargeable AAA batteries. This radio does not charge rechargeable batteries; an external charger is required.



Batteries Portable or Mains Powered

Compact design and the option of Mains power or Battery, makes the portable dab radio an companion out in the garden or worksite.

Figure 3.1: Portable use of LEMEGA PR2 with battery power

3.2 Antenna Adjustment

Extend the 360-degree rotating telescopic antenna fully to ensure optimal signal reception for both DAB/DAB+ and FM stations. Adjust its position for the best possible sound quality.

3.3 Initial Scan (Auto-Scan)

Upon first power-on, or after a factory reset, the radio will automatically perform a scan to find available DAB/DAB+ and

FM stations. This process ensures that your radio is ready to use with a comprehensive list of local broadcasts.

To initiate a manual scan or rescan:

1. Press the **ALARM/SCAN** button.
2. The radio will begin scanning for available stations and store them.

4. OPERATING INSTRUCTIONS

4.1 Basic Controls

Button/Control	Function
POWER	Turns the radio on or off.
SOURCE	Switches between DAB/DAB+ and FM modes.
MENU/INFO	Accesses the menu options or displays station information (e.g., signal strength, program type).
PRESET	Accesses stored preset stations. Long press to save a station.
ALARM/SCAN	Sets alarms or initiates a station scan.
TUNE- / TUNE+	Navigates through stations or menu options.
Volume Knob (side)	Adjusts the audio volume.

4.2 DAB/DAB+ Radio Operation

1. Press **SOURCE** until DAB mode is selected.
2. The radio will automatically scan for stations. If it's the first time or after a reset, a full scan will occur.
3. Use **TUNE-** or **TUNE+** to browse through the available DAB stations.
4. To save a preset:
 - a. Tune to your desired station.
 - b. Long press the **PRESET** button.
 - c. Use **TUNE-** or **TUNE+** to select a preset number (1-30).
 - d. Press **PRESET** again to confirm and save.
5. To recall a preset: Short press the **PRESET** button, then use **TUNE-** or **TUNE+** to select the desired preset, and press **PRESET** to play.

4.3 FM Radio Operation

1. Press **SOURCE** until FM mode is selected.
2. To auto-scan for the next available station, long press **TUNE-** or **TUNE+**. The radio will stop on the next strong signal.
3. To manually tune, short press **TUNE-** or **TUNE+** to adjust the frequency in small increments.
4. Saving and recalling FM presets follows the same procedure as DAB presets (1-30).

4.4 Alarm Clock and Sleep Timer



Dual Alarms Clock & Sleep Timer

Dual independent alarms to schedule your alarms, take your favorite radio stations as the alarms ringtone to wake you up.convenient Sleep Timer that turns the Radio off when you fall asleep.

Figure 4.1: LEMEGA PR2 with alarm clock and sleep timer functionality

The radio features dual independent alarms and a convenient sleep timer.

Setting Alarms:

1. Long press the **ALARM/SCAN** button to enter alarm setup.
2. Use **TUNE-** or **TUNE+** to select Alarm 1 or Alarm 2, then press **ALARM/SCAN** to confirm.
3. Follow the on-screen prompts to set the alarm time, duration, source (DAB, FM, or buzzer), and frequency (daily, weekdays, weekends, once).
4. Press **ALARM/SCAN** to confirm each setting.
5. When an alarm sounds, press any button (except Power) to activate the snooze function for a few extra minutes of sleep. Press **POWER** to turn off the alarm.

Setting Sleep Timer:

1. While the radio is playing, short press the **MENU/INFO** button repeatedly until "Sleep" appears on the display.

2. Use **TUNE-** or **TUNE+** to select the desired sleep timer duration (e.g., 15, 30, 45, 60 minutes, or Off).
3. The radio will automatically turn off after the selected duration.

4.5 Personal Listening (Headphone Output)

The LEMEGA PR2 includes a headphone output jack, allowing for private listening without disturbing others. Simply plug your standard 3.5mm headphones into the headphone port located on the side of the radio.



Personal Listening

Enjoy your favourite stations directly from the dab radio with its powerful 2.5W built in speaker.

The additional Headphone port allows you to have a more personal audio experience without disturbing anyone.

Figure 4.2: Enjoying personal listening with headphones

5. MAINTENANCE

- **Cleaning:** To clean the radio, use a soft, dry cloth. Do not use abrasive cleaners, waxes, or solvents as they may damage the surface.
- **Battery Care:** If using AAA batteries, remove them if the radio will not be used for an extended period to prevent leakage and damage. As noted in the setup section, this radio does not charge rechargeable batteries.

- **Antenna:** Handle the telescopic antenna with care to avoid bending or breaking it.
- **Environment:** Keep the radio away from direct sunlight, heat sources, and excessive moisture. Ensure adequate ventilation around the unit.

6. TROUBLESHOOTING

Problem	Possible Cause	Solution
No power / Radio does not turn on.	Power adapter not connected properly; Batteries are depleted or incorrectly inserted.	Ensure the power adapter is securely plugged into both the radio and the mains socket. If using batteries, check their polarity and replace them if necessary.
Poor reception / Static sound.	Antenna not fully extended or positioned incorrectly; Weak signal in your area.	Fully extend and adjust the telescopic antenna. Try moving the radio to a different location, ideally near a window, to improve signal strength. Perform a new auto-scan.
Alarm does not sound.	Alarm not activated; Alarm volume too low; Incorrect alarm time/date setting.	Check that the alarm is enabled in the settings. Ensure the volume is set to an audible level. Verify the alarm time and frequency settings.
Battery drains quickly.	Non-rechargeable batteries used; Radio left on or in standby for extended periods.	Use high-quality rechargeable AAA batteries. Ensure the radio is fully powered off when not in use, especially if relying on battery power.
Buttons are unresponsive.	Temporary software glitch.	Disconnect the power adapter and remove batteries for a few minutes, then reconnect. This performs a soft reset.

7. SPECIFICATIONS

Model: PR2

Brand: LEMEGA

Product Dimensions: 15.3L x 4.5W x 9H centimetres (6.02 x 1.77 x 3.54 inches)

Weight: Approximately 300 g

Tuner Technology: DAB/DAB+, FM

Preset Stations: 60 (30 DAB/DAB+, 30 FM)

Power Source: Mains Powered (via USB cord and adapter) or 4 x AAA Batteries (not included)

Connectivity Technology: USB (for power), 3.5mm Headphone Output

Special Feature: Portable, Lightweight, Dual Alarms, Sleep Timer, Headphone-Out

Colour: Walnut (as per current model)

Manufacturer: LEMEGA

Country of Origin: China



DAB/DAB+ and FM Radio

Enjoy all of your favourite DAB / DAB+ and FM stations with superior quality sound. Easy set-up and quick Auto-Scan, one-touch access to your 60 presets stations(30 DAB/30 FM).


Figure 7.1: LEMEGA PR2 Product Dimensions

8. WARRANTY AND SUPPORT

For warranty information, technical support, or any inquiries regarding your LEMEGA PR2 radio, please contact LEMEGA customer service directly or refer to the warranty card included with your product.

You can also visit the official LEMEGA store for more information and support resources:

[Visit the LEMEGA Store on Amazon](#)

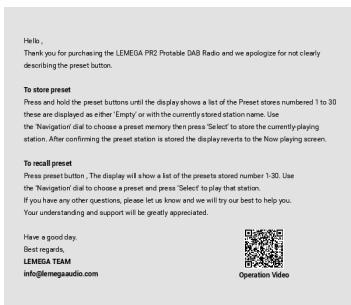

[\[pdf\]](#) Frequently Asked Questions Recall

pr2 FAQ LEMEGA PR2 Portable DAB and FM Digital Radio Personal Small Alarm Clock 60 Preset Stations Headphones Out Batteries or Mains Powered Walnut Electronics Photo 81qhJjPbSzL m media amazon images | |||

Hello , Thank you for purchasing the LEMEGA PR2 Portable DAB Radio and we apologize for not clearly describing the preset button. To store preset Press and hold the preset buttons until the display shows a list of the Preset stores numbered 1 to 30 these are displayed as either Empty or with the ...

lang:en **score:28** filesize: 433.96 K page_count: 1 document date: 2022-04-09

[\[pdf\]](#) User Manual

PR2 user manual 1 Terence User Manual LEMEGA Portable DAB and FM Digital Radio Personal Small Alarm Clock 60 Preset Stations Headphones Out Batteries or Mains Powered Walnut Electronics Photo D1JYOfszXjL m media amazon images | |||

Power Supply E1 E2 E3 E4 E5 E6 E7 E8 E9 E10 E11 E12 E13 E14 ...

lang:en **score:18** filesize: 9.23 M page_count: 2 document date: 2022-06-23