

## Kidde PRO-4MP-1

# Kidde Commercial-Grade Fire Extinguisher PRO-4MP-1 User Manual

Model: PRO-4MP-1

## 1. INTRODUCTION AND OVERVIEW

---

The Kidde Commercial-Grade Fire Extinguisher PRO-4MP-1 is designed for commercial use, providing effective fire suppression for various fire types. This rechargeable unit is engineered to combat Class A, B, and C fires, making it a versatile safety device for offices, schools, and other commercial properties.

It features a durable, corrosion-resistant aluminum construction with an impact-resistant painted aluminum handle and metal valve. The extinguisher offers a discharge rate of 13-15 seconds and a range of 12-18 feet, operating at 100 PSI.



# 2X

**MORE FIRE  
FIGHTING POWER<sup>x</sup>**

*<sup>x</sup>When compared to the Class A firefighting capability  
of a UL 1-A:10-B:C rated fire extinguisher.*

The Kidde PRO-4MP-1 offers enhanced firefighting capability.

# FOR USE ON THESE TYPES OF FIRE:

**A** TRASH • WOOD • PAPER



**CLASS A**  
Common  
Combustibles

**B** LIQUIDS



**CLASS B**  
Flammable  
Liquids  
& Gases

**C** ELECTRICAL EQUIP.



**CLASS C**  
Energized  
Electrical  
Equipment

This extinguisher is suitable for Class A, B, and C fires.

## 2. WHAT'S IN THE BOX

Your Kidde Commercial-Grade Fire Extinguisher package includes:

- One (1) Kidde PRO-4MP-1 Fire Extinguisher
- One (1) Wall Mount Bracket

## 3. SAFETY INFORMATION

Always prioritize safety when handling and storing fire extinguishers. While the dry chemical agent in this extinguisher is non-toxic, it may cause skin irritation upon contact. It is crucial to place the fire extinguisher in an easily accessible location where fires are most likely to start.

Familiarize yourself with the operating instructions before an emergency occurs. Regular inspection is vital to ensure the unit is ready for use.

## 4. SETUP AND INSTALLATION

The Kidde PRO-4MP-1 comes with a wall mount bracket for convenient and accessible storage. Choose a location that is easily reachable in case of a fire, such as near an exit or in a high-risk area like a kitchen or garage.

1. Select a suitable wall location, ensuring it is visible and unobstructed.
2. Use appropriate fasteners (not included) to securely attach the wall mount bracket to the wall.
3. Place the fire extinguisher into the mounted bracket. Ensure the hose is properly secured in its clip.

# WALL HANGER INCLUDED



The included wall hanger allows for easy mounting and access.

[Installation Overview Video](#)

Your browser does not support the video tag.

This video provides a quick overview of the Kidde fire extinguisher, including unboxing and demonstrating the wall mount bracket. It highlights the product's features and ease of installation.

## 5. OPERATING INSTRUCTIONS (PASS METHOD)

In the event of a fire, follow the standard PASS method for effective operation:

1. **Pull the pin:** Remove the safety pin from the handle.
2. **Aim at the base of the fire:** Direct the nozzle towards the lowest point of the flames.
3. **Squeeze the lever:** Press the handle to discharge the extinguishing agent.
4. **Sweep side to side:** Move the nozzle from side to side, covering the entire area of the fire until it is extinguished.



## EASY & RELIABLE OPERATION

Designed to effectively combat fire hazards via the PASS firefighting method.

*Product shown is representative only.  
Actual product may differ.*

The multi-directional discharge hose allows for effective fire combat.



Visual guide to the P.A.S.S. method for fire extinguisher operation.

## EASY TO PULL SAFETY PIN



*Product shown is representative only.  
Actual product may differ.*

The easy-to-pull safety pin ensures quick access in an emergency.

## 6. MAINTENANCE

Regular maintenance ensures your fire extinguisher is always ready for use.

- **Pressure Indicator:** Check the pressure gauge monthly. The arrow should be pointed in the green area, indicating the unit is fully charged. If the arrow is outside the green area, the extinguisher needs servicing.
- **Rechargeable:** This fire extinguisher is rechargeable. After any use, or if the pressure gauge indicates low pressure, the unit must be recharged by a certified professional.
- **Inspection Tag:** Utilize the included inspection tag to record monthly checks and professional servicing dates.
- **QR Code:** Scan the QR code on the extinguisher for quick access to online registration, warranty information, and product servicing details.

# PRESSURE INDICATOR

Fully charged when arrow is pointed in the green area.



Ensure the pressure indicator is in the green zone.



# REFILLABLE & REUSABLE



*Service must be performed by certified professional.*

The unit is refillable and reusable, requiring professional service.

# LOCATION SIGN & INSPECTION TAG INCLUDED



*Product shown is representative only.  
Actual product may differ.*

Use the provided inspection tag to maintain records.



# QR CODE FOR SIMPLIFIED SERVICEABILITY



Scan for fast and efficient product deployment, inspection and servicing.

*Product shown is representative only. Actual product may differ.*

Scan the QR code for simplified serviceability and product information.

## 7. TROUBLESHOOTING

If your fire extinguisher is not functioning correctly or the pressure gauge is not in the green zone, it requires immediate attention.

- **Low Pressure:** If the pressure gauge indicates low pressure (needle outside the green zone), the extinguisher needs to be recharged by a qualified fire equipment service professional. Do not attempt to recharge it yourself.
- **Damaged Components:** If any part of the extinguisher (hose, nozzle, handle, cylinder) appears damaged, corroded, or obstructed, do not use it. Replace the unit or have it inspected and repaired by a professional.
- **Missing Safety Pin:** If the safety pin is missing or broken, the extinguisher may discharge accidentally. Replace the unit or have it serviced.

Always ensure your fire extinguisher is in optimal working condition for your safety.

## 8. SPECIFICATIONS

Feature	Detail
Model Number	PRO-4MP-1
Fire Class Rating	2-A:10-B:C
Agent Weight	4 LBS
Total Weight	6.5 pounds
Discharge Time	13-15 seconds
Discharge Range	12-18 feet
Operating Pressure	100 PSI
Dimensions (Package)	14.17 x 6.38 x 5.2 inches
Manufacturer	Kidde
UL Listed	Yes

**13.9"**



**7.5"**

**AGENT WEIGHT  
4 LBS**

**TOTAL WEIGHT  
6.5 LBS\***


*\*Total weight may vary.*

Key dimensions and weight specifications of the extinguisher.

## **9. WARRANTY AND SUPPORT**

The Kidde Commercial-Grade Fire Extinguisher PRO-4MP-1 comes with a 6-year limited manufacturer's warranty. For warranty claims, product registration, or additional support, please refer to the information provided on the extinguisher label or visit the official Kidde website.

You can also scan the QR code on your extinguisher for direct access to online registration and warranty details.

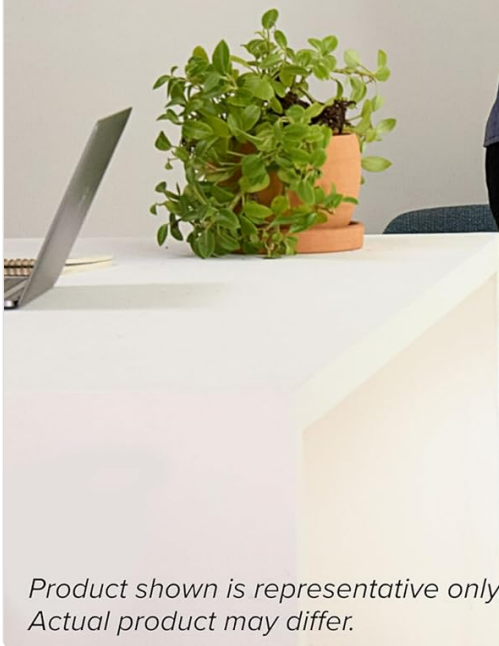

*Product shown is representative only.  
Actual product may differ.*

The Kidde PRO-4MP-1 is backed by a 6-year limited manufacturer's warranty.

For further assistance, please visit [www.kidde.com](http://www.kidde.com) or contact Kidde customer support.