

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

- › [Rust-Oleum](#) /
- › [Rust-Oleum 245197 Universal All Surface Spray Paint Instruction Manual](#)

Rust-Oleum 245197

Rust-Oleum Universal All Surface Spray Paint Instruction Manual

Model: 245197 | Brand: Rust-Oleum

1. PRODUCT OVERVIEW

Rust-Oleum Universal Paint and Primer in One is an all-surface paint designed for both interior and exterior applications. It offers long-lasting protection and durability. The product features a comfort grip trigger delivery system to reduce finger fatigue during continuous spraying and an any-angle spray capability, allowing application even upside down. This oil-based formula protects surfaces from environmental elements, rust, and corrosion.

Key Features:

- Works on virtually any surface including wood, plastic, metal, fiberglass, concrete, wicker, vinyl, and more.
- Oil-based formula with excellent adhesion prevents rust, resists fading and chipping for a long-lasting finish.
- Fast-drying formula dries to the touch in 30 minutes and covers up to 15 sq ft per can.
- Prevents rust and corrosion for enhanced durability.
- Satin finish provides a low-sheen look on surfaces.





Figure 1: Rust-Oleum Universal All Surface Spray Paint, 12 oz, Satin Black.

2. SETUP AND PREPARATION

2.1 Required Materials:

- Rust-Oleum Universal All Surface Spray Paint
- Drop cloth or newspaper
- Lint-free cloth
- Protective eyewear
- Gloves

- Sandpaper (if surface requires smoothing)
- Painter's tape (for masking areas)



Figure 2: Essential materials for spray painting preparation.

2.2 Surface Preparation:

1. **Clean the Surface:** Ensure the surface is clean, dry, and free of loose paint, rust, wax, oil, and grease. Use a lint-free cloth for cleaning.
2. **Sand if Necessary:** Lightly sand glossy surfaces or rough areas to create a profile for better adhesion. Wipe away sanding dust.
3. **Mask Areas:** Use painter's tape to mask off any areas you do not wish to paint.
4. **Protect Surroundings:** Lay down a drop cloth or newspaper to protect the surrounding area from overspray.

ALL SURFACE ADHESION



Also suitable for: concrete, aluminum, and vinyl.

Figure 3: This paint adheres to a wide range of surfaces.

3. OPERATING INSTRUCTIONS

3.1 Using the Spray Can:

1. **Shake Well:** Shake the can vigorously for one minute after the mixing ball begins to rattle. Continue to shake occasionally during use.
2. **Test Spray:** Test spray on a piece of cardboard or an inconspicuous area to check spray pattern and color.
3. **Application:** Hold the can upright 8-12 inches from the surface. Press the comfort grip trigger firmly and spray in a steady, back-and-forth motion, slightly overlapping each stroke. For best results, apply two or more light coats a few minutes apart rather than one heavy coat.
4. **Any-Angle Spray:** The unique comfort grip trigger allows for spraying at any angle, including upside down, for maximum coverage and ease of use.
5. **Drying Time:** Dries to the touch in 30 minutes. Allow more time in cooler temperatures.

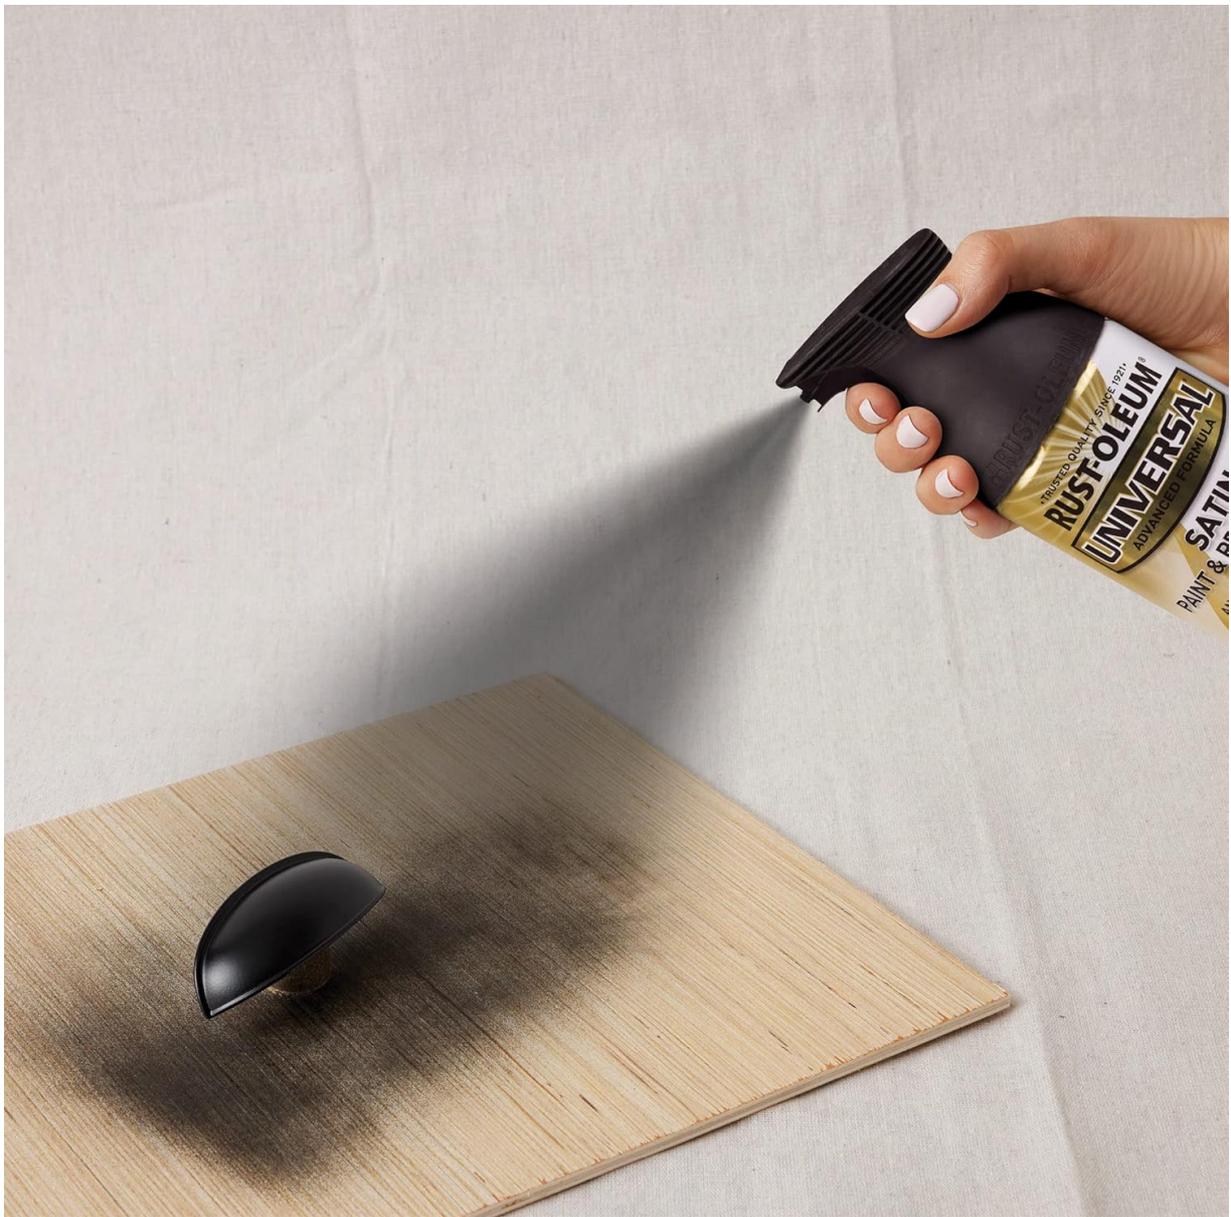


Figure 4: Applying spray paint to a surface.

REVOLUTIONARY COMFORT TRIGGER

ELIMINATES FINGER FATIGUE

— SPRAYS AT ANY ANGLE —



Figure 5: Revolutionary comfort trigger for easy application.

3.2 Finish Guide:

Rust-Oleum Universal offers various finishes. The current product is Satin Black, providing a low-sheen look. Other finishes include Metallic (high shine, sparkling colors), Matte Metallic (low shine, brushed look), Hammered (hand-hammered look), Forged Hammered (hand-crafted texture), and Clear Topcoats.

FINISHES GUIDE



*Clear topcoat shown over a black basecoat

Figure 6: Overview of available finishes.

4. MAINTENANCE

4.1 Cleaning the Nozzle:

After each use, invert the can and spray until only clear gas comes out. This prevents clogging of the nozzle for future use.

4.2 Storage:

Store the can in a cool, dry, and well-ventilated area. Keep away from heat, sparks, and open flame. Do not store in direct sunlight or where temperatures exceed 120°F (49°C).

5. TROUBLESHOOTING

5.1 Uneven Spray or Clogging:

- Ensure the can is shaken thoroughly before and during use.
- Clean the nozzle after each use by inverting the can and spraying until clear gas appears.
- If the nozzle is clogged, remove it and clean with mineral spirits. Do not insert pins or other objects into the stem. Replace the nozzle firmly with the opening pointing away from you.

6. SAFETY INFORMATION

WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. Always read and follow all directions and warnings on the product label.

- **Ventilation:** Use only outdoors or in a well-ventilated area. Ensure fresh air entry during application and drying.
- **Personal Protection:** Wear protective eyewear and gloves to prevent contact with skin and eyes. Avoid breathing vapors or spray mist.
- **Flammability:** Contents are extremely flammable. Keep away from heat, sparks, open flames, and other ignition sources. Do not smoke while using.
- **Pressure:** Contents under pressure. Do not puncture or incinerate container.
- **Keep Out of Reach:** Keep out of reach of children and pets.

Video 1: Official Rust-Oleum Universal Spray Paint and Primer overview, demonstrating its features and application.

7. SPECIFICATIONS

Attribute	Value
Brand	Rust-Oleum
Color	Black
Finish Type	Satin
Size	12 Ounce (Pack of 1)
Item Volume	12 Fluid Ounces
Special Feature	Chip Resistant, Fade Resistant, Rust Resistant, UV Resistant
Unit Count	12.0 Ounce
Paint Type	Spray
Specific Uses For Product	Interior/Exterior
Surface Recommendation	Aluminium, Glass, Metal, Plastic, Vinyl, Wood
Indoor/Outdoor Usage	Indoor
Item Form	Aerosol
Model Name	Universal Enamel Spray Paint
Part Number	245197
Item Weight	1 pounds
Product Dimensions	2.63 x 2.63 x 8.94 inches
UPC	020066172459

8. WARRANTY AND SUPPORT

For warranty information and customer support, please refer to the product packaging or contact Rust-Oleum

directly. The product is covered by a standard manufacturer's warranty.

Related Documents - 245197

	<p>Rust-Oleum Stops Rust Turbo Spray System SRT-44 Technical Data Sheet</p> <p>Technical data sheet for Rust-Oleum Stops Rust with Turbo Spray System (SRT-44), including product description, application instructions, and physical properties. Learn about coverage, dry times, and preparation.</p>
	<p>Rust-Oleum Stops Rust Textured Sprays: Technical Data and Application Guide</p> <p>Technical data and application guide for Rust-Oleum Stops Rust Textured Sprays, detailing product uses, preparation, application instructions, dry times, cleanup, and physical properties for various textured spray paint finishes.</p>
	<p>Rust-Oleum Furniture Transformations Low VOC System Technical Data and Application Guide</p> <p>Comprehensive technical data and application guide for Rust-Oleum Furniture Transformations Low VOC system, detailing surface preparation, deglosser, bond coat, decorative glaze, and topcoat application for a durable furniture finish.</p>
	<p>Rust-Oleum Fillcoat Waterproofing Membrane: Technical Specifications</p> <p>Detailed technical specifications for Rust-Oleum Fillcoat waterproofing membrane, including application, drying times, consumption, and safety data for roofs and terraces. Product code: Fillcoat.</p>
	<p>Rust-Oleum Painter's Touch 2X Ultra Cover Satin Sprays Technical Data Sheet</p> <p>Comprehensive technical data for Rust-Oleum Painter's Touch 2X Ultra Cover Satin Sprays, detailing product uses, available colors, application instructions, surface preparation, and physical properties. Includes safety warnings and contact information.</p>
	<p>Rust-Oleum Pourable Concrete Patch: Technical Data & Application Guide</p> <p>Comprehensive technical data and application guide for Rust-Oleum Pourable Concrete Patch, a fiber-reinforced material for fast and easy concrete repairs. Includes preparation, mixing, curing, and physical properties.</p>