

JJC BR-E1

JJC BR-E1 Wireless Bluetooth Remote Control Instruction Manual

Model: BR-E1

INTRODUCTION

The JJC BR-E1 Wireless Bluetooth Remote Control is designed for select Canon cameras, offering convenient remote operation. This remote functions as a replacement for the Canon BR-E1 wireless remote control, providing various shooting modes and camera control from a distance.

This manual provides essential information for the proper setup, operation, and maintenance of your JJC BR-E1 remote control.

PRODUCT FEATURES

- **Wireless Bluetooth Connectivity:** Operates via 2.4 GHz GFSK transmission for reliable connection.
- **Multi-function Control:** Supports instant shooting, 2-second delayed shooting, video recording, autofocus (AF), and zoom functions.
- **Operating Distance:** Effective range of approximately 10 meters (32.8 feet) in any direction.
- **Power Source:** Powered by one CR2032 battery (included).
- **Compact and Portable:** Designed for easy carrying and storage.

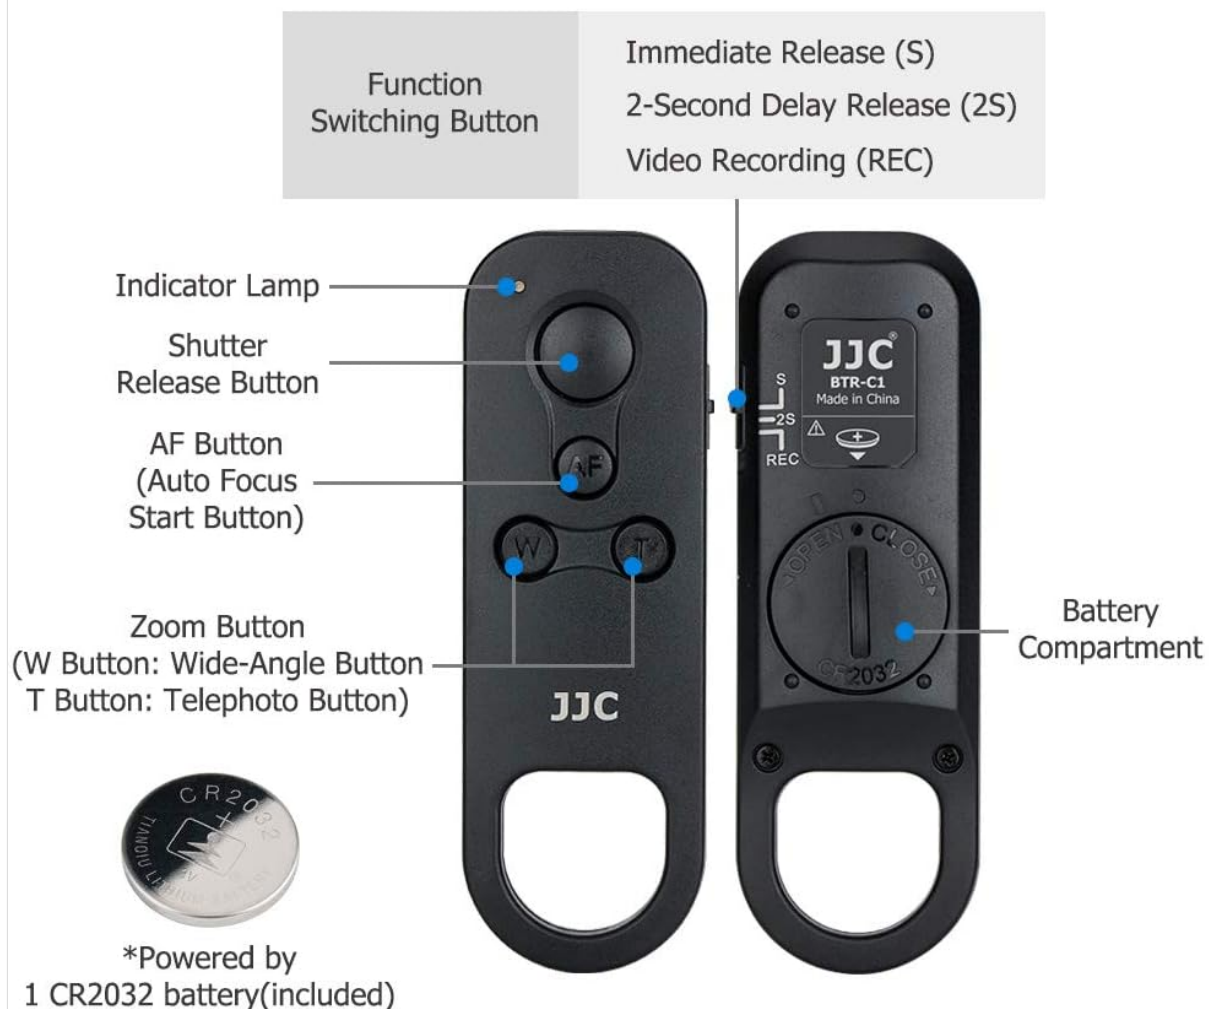


Figure 1: Overview of the JJC BR-E1 remote control, highlighting its buttons and battery compartment. The remote features a shutter release button, AF (autofocus) button, W (wide-angle) and T (telephoto) zoom buttons, and a function switching button for instant release, 2-second delay, and video recording. It is powered by a CR2032 battery.

COMPATIBILITY

The JJC BR-E1 remote control is compatible with the following Canon camera models:

- Canon EOS R1, R100, R8, R50, R6 Mark II, R10, R7, R5C, R3, R5, R6, R, RP
- Canon EOS M50 Mark II, M6 Mark II, M50, M200
- Canon EOS 6D Mark II, 90D, 77D, 850D, 800D, 200D II, 200D
- Canon PowerShot V10, G5 X Mark II, G7 X Mark III, SX70 HS

Important Notes on Compatibility:

- The zoom function of the remote is not available on the PowerShot V10.
- For EOS R5C, the remote can only be used in photo mode. Ensure Bluetooth is enabled on your camera.
- Power zoom lenses can be zoomed directly by pressing the zoom button on the remote control.
- Some lenses may require a Power Zoom Adapter (not included) to utilize the zoom buttons on the remote.

- During viewfinder shooting, the lens cannot be zoomed via the remote's zoom button.



Figure 2: The JJC BR-E1 remote control positioned next to a Canon camera, illustrating its intended use with compatible models. The image emphasizes the remote's function as a replacement for the Canon BR-E1.

SETUP

Battery Installation

1. Locate the battery compartment on the back of the remote control (refer to Figure 1).
2. Use a small coin or tool to twist the battery cover counter-clockwise to open.
3. Insert one CR2032 battery with the positive (+) side facing up.
4. Replace the battery cover and twist clockwise to secure it.

Pairing the Remote with Your Camera

Follow these steps to pair the JJC BR-E1 remote control with your compatible Canon camera:

1. On your camera, navigate to the menu and enable Bluetooth.
2. Select the "Pairing" option within the camera's Bluetooth settings.
3. Simultaneously press and hold the **W** and **T** buttons on the remote control for more than 3 seconds.

The indicator lamp on the remote will flash.

4. On the camera screen, confirm the pairing by pressing "OK" when prompted. The pairing process is complete when the camera indicates a successful connection.

OPERATING INSTRUCTIONS


Before operating, ensure your camera's drive mode is set to "remote mode" or a self-timer mode that supports remote control (e.g., 10 sec/remote).

For Photos:

- **Instant Shot:** Set the remote to 'S' mode (Single Shot) using the function switching button, then press the shutter release button.
- **2-Second Delayed Shot:** Set the remote to '2S' mode (2-Second Delay) using the function switching button, then press the shutter release button.
- **Long Exposure (Bulb Mode):** Set your camera to Bulb mode. Press the shutter release button on the remote to start the exposure, and press it again to stop.
- **Autofocus:** Press the **AF** button to initiate autofocus.
- **Zoom:** Use the **W** (Wide-Angle) and **T** (Telephoto) buttons to zoom in or out with compatible power zoom lenses.

For Videos:

To start or stop video recording, ensure your camera is set to video mode. Then, press the shutter release button on the remote control.

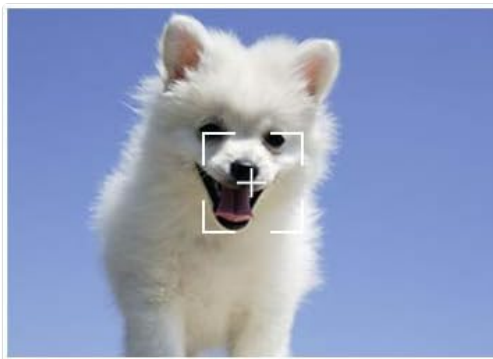


Instant shooting



Video recording



2-second delay shooting

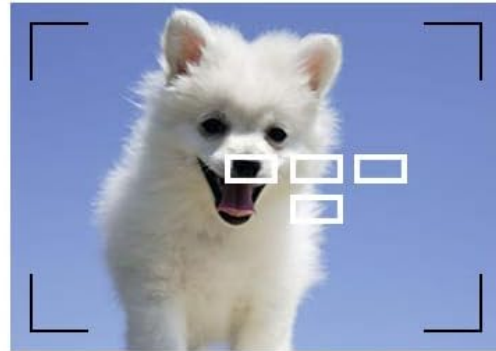

Focusing with AF



Zooming



The BTR-C1 can be used for instant shooting, 2-second delay shooting, video recording, focusing with AF and zooming*

Figure 3: Visual representation of the various functions supported by the JJC BR-E1 remote control, including instant shutter, video control, T/W zoom, 10m range, and delay shutter. Images depict a small white dog for instant shooting, video recording, AF focusing, and zooming, and people on a beach for 2-second delay shooting.

The BTR-C1 can be used for instant shooting, 2-second delay shooting, video recording, focusing with AF and zooming*



- * Power zoom lenses can be zoomed directly by pressing the zoom button on the remote control;
- * Some lenses need to be used with the Power Zoom Adapter (not included in the package) to use the zoom button on the remote control.
- * During viewfinder shooting, the lens can not be zoomed by pressing the zoom button on the remote.

Figure 4: A hand holding the JJC BR-E1 remote control, demonstrating its use for capturing moments like a family photo. This image highlights the convenience of remote operation for group shots or self-portraits.

MAINTENANCE

- Keep the remote control dry. Do not expose it to moisture or rain.
- Clean the remote with a soft, dry cloth. Avoid using harsh chemicals or abrasive materials.
- Store the remote in a cool, dry place away from direct sunlight and extreme temperatures.
- If the remote will not be used for an extended period, remove the CR2032 battery to prevent leakage.



The remote is portable and you can put it in your pocket or hang it on your key ring

Figure 5: The JJC BR-E1 remote control demonstrating its portability, shown being slipped into a pocket and stored inside a camera bag. This illustrates the ease of carrying and protecting the device.

TROUBLESHOOTING

- **Remote not responding:**

- Check if the battery is correctly installed and has sufficient power. Replace if necessary.
- Ensure the remote is within the operating distance (approx. 10m/32.8').
- Re-pair the remote with your camera following the pairing instructions in the Setup section.
- Verify that the camera's Bluetooth is enabled and the drive mode is set correctly.

- **Zoom function not working:**

- Confirm that your lens is a power zoom lens or that you are using a compatible Power Zoom Adapter (if required).
- The zoom function is not available during viewfinder shooting. Use Live View or screen shooting.
- The zoom function is not supported on the PowerShot V10.

- **Video recording not starting/stopping:**

- Ensure your camera is set to video mode before attempting to record.

SPECIFICATIONS

Model Name	BR-E1
Transmission Method	2.4 GHz, GFSK modulation
Operating Distance	Approx. 10 m / 32.8 ft
Power Source	CR2032 battery (included)
Dimensions	Approx. 91.5 x 30.8 x 12.7 mm (3.6 x 1.2 x 0.5 inches)
Weight	Approx. 14g



Figure 6: A detailed diagram illustrating the dimensions of the JJC BR-E1 remote control, including its length (91.5mm / 3.6"), width (30.8mm / 1.2"), and thickness (12.7mm / 0.5").



Specifications

Transmission method: 2.4GHz, GFSK modulation

Operating distance: Approx. 10m / 32.8'

Power: CR2032 battery

Dimension: Approx. 91.5 x 30.8 x 12.7mm (3.6 x 1.2 x 0.5")

Weight: Approx. 14g

Figure 7: The JJC BR-E1 remote control shown with a camera and a visual indicator of its wireless operating range, approximately 10 meters or 32.8 feet. Icons also represent instant shutter, video control, T/W zoom, and delay shutter functions.

WARRANTY AND SUPPORT

Information regarding warranty coverage and customer support for the JJC BR-E1 Wireless Bluetooth Remote Control was not available in the provided product data. Please refer to the product packaging or the manufacturer's official website for specific warranty terms and support contact details.