

iClever BK10

iClever BK10 Bluetooth Wireless Keyboard User Manual

Model: BK10

INTRODUCTION

Thank you for choosing the iClever BK10 Bluetooth Wireless Keyboard. This manual provides detailed instructions on how to set up, operate, and maintain your keyboard to ensure optimal performance. Please read this manual carefully before use and retain it for future reference.

PACKAGE CONTENTS

- iClever BK10 Bluetooth Wireless Keyboard
- USB Charging Cable
- User Manual

SPECIFICATIONS


Brand	iClever
Model Number	BK10
Connectivity Technology	Bluetooth
Compatible Devices	Android 9+, ChromeOS (BT 4.0+), Windows 10/11, iPadOS 13.4+, macOS 10.15+
Keyboard Layout	AZERTY
Number of Keys	78
Switch Type	Scissor Switch

Power Source	Battery Powered
Product Dimensions	43L x 14W x 2.5H centimeters
Internal Material	Acrylonitrile Butadiene Styrene, Stainless Steel

SETUP

1. Initial Charging

Before first use, fully charge the keyboard. Connect the provided USB charging cable to the keyboard's USB-C port and the other end to a USB power source (e.g., computer, wall adapter). The charging indicator light will show charging status and turn off when fully charged.

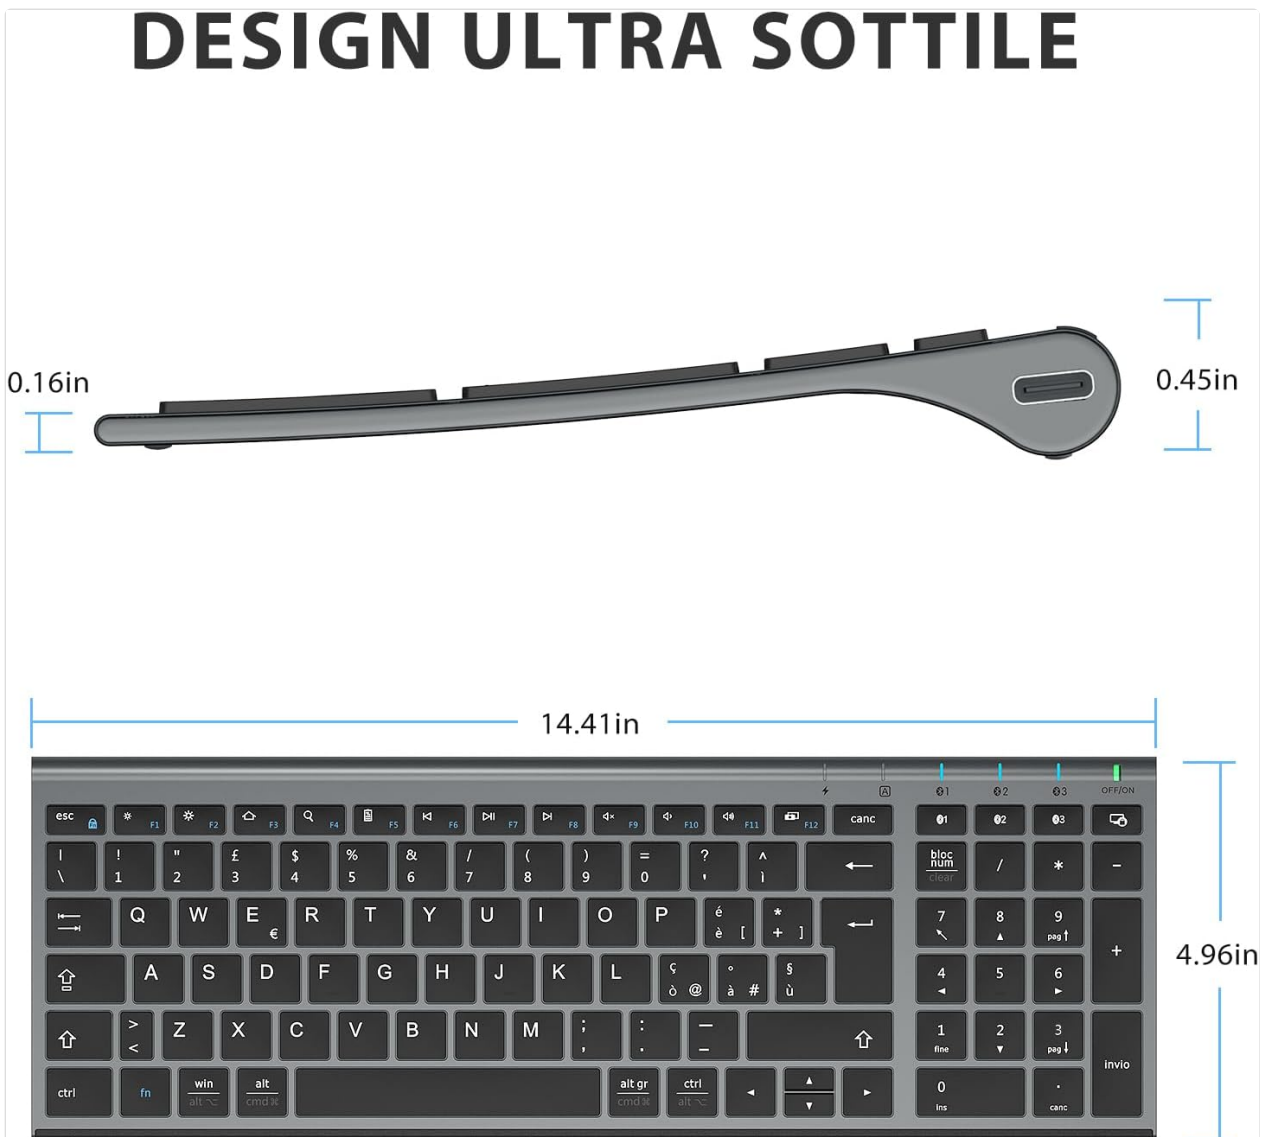

The iClever BK10 keyboard connected via USB-C for charging. This image details the 280 mAh lithium battery capacity, a charging time of less than 2 hours, and a standby time of 90 days.

2. Power On/Off

Locate the power switch on the keyboard. Slide the switch to the 'ON' position to power on the keyboard. Slide it to the 'OFF' position when not in use to conserve battery.

3. Bluetooth Pairing

The iClever BK10 keyboard supports connection to up to three devices simultaneously.

1. Turn on the keyboard using the power switch.
2. Press the **Fn** key simultaneously with one of the Bluetooth channel keys (**BT1**, **BT2**, or **BT3**) to select a channel.
3. Press and hold the selected Bluetooth channel key (e.g., **BT1**) for 3-5 seconds until the indicator light for that channel starts blinking rapidly. This indicates the keyboard is in pairing mode.
4. On your device (computer, tablet, smartphone), enable Bluetooth and search for available devices.
5. Select "iClever BK10" (or similar name) from the list of found devices.
6. Follow any on-screen prompts to complete the pairing process. The indicator light will stop blinking and remain solid for a few seconds, then turn off, indicating a successful connection.



The iClever BK10 keyboard demonstrating its ability to connect to an iPad, MacBook, and iPhone via three distinct Bluetooth channels. The image also illustrates key mapping for Windows/Android (Alt/Cmd) and iPad/Mac (Alt/Cmd) operating systems.

OPERATING THE KEYBOARD

1. Switching Between Paired Devices

To switch between your paired devices, simply press the **Fn** key along with the corresponding Bluetooth

channel key (**BT1**, **BT2**, or **BT3**) that your device is paired to. The keyboard will automatically connect to the selected device.

2. Function Keys (Fn)

The keyboard features a row of function keys (F1-F12) that also serve as multimedia and shortcut keys. To use the secondary function of these keys, press and hold the **Fn** key while pressing the desired function key.

3. Operating System Compatibility

The iClever BK10 keyboard is designed to be compatible with various operating systems. Key functions may adapt slightly depending on the connected OS. For optimal performance, ensure your device's Bluetooth version is 4.0 or higher.

TASTI A BASSO PROFILO

Grazie al loro basso profilo e al design del tasto a forbice, questi tasti garantiscono una digitazione silenziosa e confortevole



Close-up of the iClever BK10 keyboard with a hand typing, highlighting the low-profile keys and scissor switch mechanism designed for quiet and comfortable typing.

MAINTENANCE

1. Cleaning

To clean your keyboard, power it off and disconnect it from any devices. Use a soft, lint-free cloth slightly dampened with water or a mild cleaning solution. Avoid using harsh chemicals, abrasives, or excessive

moisture. Do not spray cleaners directly onto the keyboard.

2. Battery Care

To prolong the battery life of your keyboard:

- Charge the keyboard fully before its first use.
- Avoid completely draining the battery frequently.
- Store the keyboard in a cool, dry place when not in use for extended periods.
- Turn off the keyboard when transporting it or when not in use to prevent accidental key presses and battery drain.

TROUBLESHOOTING

1. Keyboard Not Connecting/Pairing

- Ensure the keyboard is powered on and fully charged.
- Make sure Bluetooth is enabled on your device.
- Ensure the keyboard is in pairing mode (indicator light blinking).
- Try unpairing and re-pairing the keyboard from your device's Bluetooth settings.
- Restart both the keyboard and your device.
- Ensure your device's Bluetooth version is compatible (BT 4.0+ recommended).

2. Keys Not Responding

- Check if the keyboard is connected to the correct device.
- Ensure the battery is not low. Charge the keyboard if necessary.
- Restart the keyboard and the connected device.
- Clean any debris from around the keys.

3. Connection Drops Frequently

- Ensure there are no strong interference sources (e.g., Wi-Fi routers, other Bluetooth devices) nearby.
- Keep the keyboard within the recommended operating range of your device.
- Ensure the keyboard is fully charged.

WARRANTY AND SUPPORT

iClever products come with a standard warranty. For detailed warranty information, technical support, or customer service, please refer to the warranty card included with your product or visit the official iClever website. Please have your product model number (BK10) and purchase information ready when contacting support.

PRODUCT OVERVIEW IMAGES



Acciaio Inossidabile di Alta Qualità

Pittura Matte Definita

SOFISTICATO E STILOSIO

A top-down view of the iClever BK10 Bluetooth Wireless Keyboard, showcasing its full layout including the numeric keypad and function keys.

RISPARMIO ENERGETICO E RISPETTO PER L'AMBIENTE



Capacità della batteria al litio
280 mAh



Tempo di ricarica <2 ore
Tempo di attesa: 90 giorni



A side view of the iClever BK10 keyboard, illustrating its ultra-thin profile with a thickness ranging from 0.16 inches to 0.45 inches.



The iClever BK10 keyboard positioned on a desk in an office environment, alongside a computer monitor, laptop, tablet, and smartphone, illustrating its versatile use in various professional and personal setups.