

## Alarm.com ADC-VDB770

# Alarm.com ADC-VDB770 Video Doorbell User Manual

Model: ADC-VDB770

## 1. INTRODUCTION

---

The Alarm.com ADC-VDB770 Video Doorbell provides advanced monitoring capabilities for your home's front entrance. This device integrates seamlessly with Alarm.com security systems, offering high-definition video, two-way audio communication, and intelligent video analytics. This manual provides essential information for the installation, operation, and maintenance of your video doorbell.

## 2. PRODUCT FEATURES

---

- **Expansive 150° Vertical Field of View (FOV):** Monitor the entire doorway area with a wide perspective.
- **Full HD Video Resolution:** Capture clear and detailed footage.
- **HDR (High Dynamic Range):** Enhanced video quality in varying lighting conditions.
- **IR Night Vision:** Clear visibility even in low-light or nighttime environments.
- **Video Analytics:** Intelligent detection of people and activity.
- **Live Video & Saved Clip Viewing:** Access real-time footage and review recorded events via the Alarm.com app.
- **Two-Way Audio:** Communicate with visitors at your door from anywhere.
- **Wi-Fi Connectivity:** Seamless integration with your home network.

## 3. WHAT'S IN THE BOX

---

Upon unboxing your Alarm.com ADC-VDB770 Video Doorbell, verify that all components are present. The standard package typically includes:

- Alarm.com ADC-VDB770 Video Doorbell Unit
- Mounting Bracket and Screws
- Wiring Harness/Connectors
- Installation Guide (often a quick start guide)

*Note: Specific contents may vary. Refer to your product packaging for a precise list.*



Image 3.1: Front view of the Alarm.com ADC-VDB770 Video Doorbell, showing the camera lens, speaker, microphone, and illuminated doorbell button.

## 4. SETUP AND INSTALLATION

---

The ADC-VDB770 Video Doorbell is designed for outdoor use and typically replaces an existing wired doorbell. Professional installation is recommended, especially if you are unfamiliar with electrical wiring. The device uses existing doorbell wiring and connects via Wi-Fi.

### 4.1 Pre-Installation Checks

- Ensure your existing doorbell wiring provides adequate power (typically 16-24 VAC).

- Confirm strong Wi-Fi signal strength at the installation location.
- Download the Alarm.com app on your smartphone or tablet.

## 4.2 Wiring and Mounting

1. **Turn off power:** Before beginning, turn off power to your existing doorbell at the circuit breaker.
2. **Remove old doorbell:** Disconnect and remove your existing doorbell button.
3. **Install chime module (if required):** Some installations may require a chime module to be installed in your indoor chime box. Follow the instructions provided with the module.
4. **Connect wiring:** Connect the existing doorbell wires to the terminals on the ADC-VDB770 mounting bracket.
5. **Mount the doorbell:** Secure the mounting bracket to the wall using the provided screws. Attach the ADC-VDB770 unit to the mounting bracket.





Image 4.1: The Alarm.com ADC-VDB770 Video Doorbell, illustrating its design for wall mounting.

### 4.3 Network Connection and Setup

1. **Restore power:** Turn the power back on at the circuit breaker. The doorbell will power on and indicate its status.
2. **Open Alarm.com app:** Launch the Alarm.com app on your smartphone or tablet.
3. **Add device:** Follow the in-app instructions to add a new video device. The doorbell supports AP mode (built-in Wi-Fi) for easy setup.
4. **Configure settings:** Customize motion detection zones, notification preferences, and video recording settings within the app.

For detailed, step-by-step installation videos and guides, refer to the official Alarm.com support resources or consult your security system provider.

## 5. OPERATING INSTRUCTIONS

---

Once installed and configured, the ADC-VDB770 Video Doorbell provides continuous monitoring and interactive features through the Alarm.com app.

### 5.1 Live View and Two-Way Audio

- Open the Alarm.com app and navigate to the video doorbell section.
- Tap on the doorbell feed to view live video from your front door.
- Use the microphone icon to enable two-way audio and speak with visitors.

### 5.2 Motion Detection and Alerts

- The doorbell uses motion detection to identify activity at your door.
- You will receive push notifications on your smartphone when motion is detected or the doorbell button is

pressed.

- Customize motion zones and sensitivity settings in the Alarm.com app to reduce false alerts.

### 5.3 Recorded Video Clips

- Events such as doorbell presses or motion detection trigger video recordings.
- Access and review these saved clips within the Alarm.com app.

## 6. MAINTENANCE

---

Regular maintenance ensures optimal performance and longevity of your video doorbell.

- **Clean the Lens:** Periodically wipe the camera lens with a soft, damp cloth to remove dust, dirt, or smudges that may affect video clarity. Avoid abrasive cleaners.
- **Check for Obstructions:** Ensure no plants, decorations, or other objects are blocking the camera's field of view or the motion sensor.
- **Software Updates:** Keep your Alarm.com app and doorbell firmware updated to benefit from the latest features and security enhancements. Updates are typically managed through the Alarm.com platform.
- **Power Supply:** Verify that the doorbell is receiving consistent power. Fluctuations can affect performance.

## 7. TROUBLESHOOTING

---

If you encounter issues with your ADC-VDB770 Video Doorbell, refer to the following common troubleshooting steps:

### 7.1 No Power / Device Offline

- **Check Circuit Breaker:** Ensure the power to your doorbell circuit is turned on.
- **Verify Wiring:** Confirm that all wiring connections are secure and correct. Loose connections can cause power interruptions.
- **Transformer Voltage:** Ensure your doorbell transformer provides adequate voltage (16-24 VAC).

### 7.2 Poor Video Quality / Connectivity Issues

- **Wi-Fi Signal Strength:** Check the Wi-Fi signal strength at the doorbell's location using the Alarm.com app. If signal is weak, consider a Wi-Fi extender or repositioning your router.
- **Router Interference:** Ensure your Wi-Fi router is not obstructed or too far from the doorbell. Other wireless devices can cause interference.
- **Clean Lens:** A dirty lens can significantly degrade video quality. Refer to the Maintenance section.

### 7.3 Slow App Response / Delayed Notifications

- **Internet Speed:** Ensure your home internet connection is stable and has sufficient upload/download speeds.
- **App Updates:** Make sure your Alarm.com app is updated to the latest version.
- **Device Restart:** Power cycle the doorbell by turning off the circuit breaker for 30 seconds and then turning it back on.

### 7.4 Doorbell Button Not Responding

- **Check Wiring:** Verify the button's wiring connections are secure.

- **Chime Module:** If a chime module is installed, ensure it is correctly wired and functioning.

If these steps do not resolve the issue, contact your Alarm.com service provider or technical support for further assistance.

## 8. SPECIFICATIONS

---





Image 8.1: Side profile of the Alarm.com ADC-VDB770 Video Doorbell, highlighting its compact design.

Feature	Specification
Model Number	ADC-VDB770
Indoor/Outdoor Usage	Outdoor
Compatible Devices	Smartphone, Tablet
Power Source	Wired (requires existing doorbell wiring)
Connectivity Protocol	Wi-Fi
Mounting Type	Wall Mount
Video Capture Resolution	1080p
Color	White
Viewing Angle	150 Degrees
Water Resistance Level	Water Resistant (IP54)
Item Dimensions (L x W x H)	1.5 x 1.7 x 5 inches
Item Weight	1.04 pounds (0.47 Kilograms)
Low Light Technology	Night Color, Infrared
Alert Type	Motion Only
Audio Visual Recording Capabilities	Two-Way Audio
UPC	850010773094

## 9. WARRANTY AND SUPPORT

For warranty information, please refer to the documentation provided with your purchase or contact your Alarm.com service provider. Warranty terms typically cover manufacturing defects for a specified period.

For technical support, installation assistance, or service inquiries, please contact your authorized Alarm.com dealer or visit the official Alarm.com support website. Ensure you have your device model number (ADC-VDB770) and any relevant account information ready when seeking support.

© 2024 Alarm.com. All rights reserved.

## Related Documents - ADC-VDB770

	<p><a href="#">Alarm.com VDB770 Video Doorbell Installation Guide</a></p> <p>Comprehensive installation guide for the Alarm.com VDB770 Video Doorbell, covering unboxing, pre-installation checks, power module and doorbell installation, network connection, and button behavior.</p>
	<p><a href="#">How to Replace the Battery for the Alarm.com ADC-VDB770 Video Doorbell</a></p> <p>Step-by-step guide on how to replace the battery for the Alarm.com ADC-VDB770 video doorbell, including instructions for battery-less inserts.</p>
	<p><a href="#">Alarm.com ADC-VDB770 Video Doorbell Installation Guide</a></p> <p>Comprehensive installation guide for the Alarm.com ADC-VDB770 Video Doorbell, covering pre-installation requirements, power module setup, doorbell mounting, network connection via AP or WPS modes, account enrollment, status light meanings, and troubleshooting steps.</p>
	<p><a href="#">Alarm.com Video Doorbell ADC-VDB770 Installation Guide</a></p> <p>This guide provides step-by-step instructions for installing the Alarm.com Video Doorbell (ADC-VDB770), covering pre-installation checks, power module setup, doorbell mounting, network configuration via AP or WPS, account enrollment, and troubleshooting tips.</p>
	<p><a href="#">Alarm.com ADC-VDB770 Video Doorbell Installation Guide</a></p> <p>Comprehensive installation guide for the Alarm.com ADC-VDB770 Video Doorbell, covering pre-installation checks, power module setup, doorbell mounting, network connection, account enrollment, and troubleshooting.</p>



## Alarm.com Stream Video Recorder (ADC-SVR100) FAQs

Frequently asked questions about the Alarm.com Stream Video Recorder (ADC-SVR100), covering camera compatibility, network requirements, internet connectivity, video playback, storage, and hard drive configuration.

Documents - Alarm.com – ADC-VDB770

[\[pdf\]](#) Installation Guide Instructions Troubleshooting Guide Specifications Guide Accessories

Alarm Video Doorbell ADC VDB770 Installation Guide Loosen the screws on chime associated with transformer and doorbell Set wires aside 3 Take power module hook curved advancedsecurityllc 2021 02 srsltid AfmBOopOkU96CdDc1Ujzo68Z0OcT8iNQDC jkDqULbq157kXy6 YvbZj which is printed included reference card On same Follow screen instructions to finish adding device For AfmBOoq5BukvqoRhmMcZFsOgoKe8TErAm4alhOJ8y93 IXMj96AHnBGi curved which For Use this guide assist installation of your camera 30 35s release when LED begins blink blue 2 advancedsecurityllc YvbZjadvancedsecurityllc IXMj96AHnBGiadvancedsecurityllc AfmBOopHHWW8bTkbGUvauFEd2c71IqcZRRnpdPvm52pzVnq FXOnlh0Z 2 Use Pre checklist accessoriesadvancedsecurityllc FXOnlh0Zadvancedsecurityllc AfmBOorpnLUbbbjAChr2JW3cQqAB WqQMExGF3LwslUOL JS dR6 hF accessories1 Remove existing from wall disconnect Secure so that they can be connected in a later stepadvancedsecurityllc hFadvancedsecurityllc AfmBOooo3EvrhGulqibSS7fESHbjFiBzCPeF0o88VCQF5HPWgWxiQyMv stepImportant The requires service package supports Analytics has Cameras add type The advancedsecurityllc AfmBOooo3EvrhGulqibSS7fESHbjFiBzCPeF0o88VCQF5HPWgWxiQyMvadvancedsecurityllc AfmBOoqKbjWCUJWMqOIF5HejzE10fsAPUcSuu2KK3lHsnUhlhbuBog3s The 30 2 Activate WPS Mode router will begin connect Wi Fi networkadvancedsecurityllc AfmBOoqKbjWCUJWMqOIF5HejzE10fsAPUcSuu2KK3lHsnUhlhbuBog3sadvancedsecurityllc AfmBOoo54jr3hxq5LtTqRMRZlHTF qPuNoqTxeJ13c4KK9XChx4op7AX networkTake curved white onto screw terminals it does not matter wire goes transformer advancedsecurityllc qPuNoqTxeJ13c4KK9XChx4op7AXadvancedsecurityllc AfmBOoqqN4lUV VM V7lbgmaQMDEF3DUiYcNTQKkKwq211 pwbyP transformer 1 pwbyPadvancedsecurityllc AfmBOopFlr9DJ78PJlr6bYqVylOEz2UZMZ9dms7hNoeChLqf fdsj stepADC accessories Wire crimping tool connection broadband Cable DSL or Fiber Optic internetadvancedsecurityllc 0advancedsecurityllc AfmBOor90JtN7NEuttUDXKBQvPBDN9Oca8LCiklhY tHklhdE7APjHqg internetUse tHklhdE7APjHqgadvancedsecurityllc AfmBOoqr ErWOPKPhCRZH3AXnzcotzdJh14 N21Tt7yselpO807ri6b N21Tt7yselpO807ri6badvancedsecurityllc AfmBOopLNMXLbgaV6H93XeUCVZHIXgtHR1Txezv4bWZEnn8VZyxxHsd AfmBOopLNMXLbgaV6H93XeUCVZHIXgtHR1Txezv4bWZEnn8VZyxxHsdadvancedsecurityllc AfmBOorm33JSMI0cfgJOIZzkeKfRe9ydOepXVR7smCvqM9 VeoMPjwhq stepUse AfmBOooeoZR5N54Ljpkz8ISTnQFidTDGqBVhu85E4OcuEy5bhSw10eAjadvancedsecurityllc VeoMPjwhqadvancedsecurityllc AfmBOop8wvRq4qYvv0qF1hsnPZ5dJXVkBxVNIB5aB8ZGcaW5FaxsfMEq AfmBOop8wvRq4qYvv0qF1hsnPZ5dJXVkBxVNIB5aB8ZGcaW5FaxsfMEqadvancedsecurityllc AfmBOoq7m23kXjjq5s9p1Nro2JVhDjORtlazz3 s61QEYbt4XScol 51 accessories5 Affix side using adhesive Replace cover answers alarmadvancedsecurityllc AfmBOopq bwt1ZVJnXq5U0aVTG7SzonLQ6HUI8kgrAUoh6FbVUxsq6j0advancedsecurityllc AfmBOopNo GQWt0rLcJn4dqODAoxAQEUJWlq4NLZMFvx4rbtLbAfVaPadvancedsecurityllc 51advancedsecurityllc AfmBOorNO41A4sBH1wucJZKBeEOBtmefepxFumPf4KrQR NbgWw7Y80L NbgWw7Y80Ladvancedsecurityllc AfmBOor0swRzGE9vwzCW8OG5Hq1IudnfaDli9z6DsEs0 rBmQF I



crimping tool Wi-Fi connection to br

Alarm.com Video Doorbell **ADC-VDB770** - Installation Guide Use this guide to assist with the installation of your VDB770 doorbell camera. Pre-installation checklist **ADC-VDB770** and included accessories Wire crimping tool Wi-Fi connection to broadband Cable, DSL, or Fiber Optic internet A comput...


lang:en score:60 filesize: 254.79 K page\_count: 12 document date: 2021-02-24



### [Alarm.com ADC-VDB770 Video Doorbell Installation Guide](#)

Comprehensive installation guide for the Alarm.com ADC-VDB770 Video Doorbell, covering pre-installation requirements, power module setup, doorbell mounting, network connection via AP or WPS modes, account enrollment, status light meanings, and troubleshooting steps.

lang:en score:57 filesize: 255.05 K page\_count: 12 document date: 0000-00-00

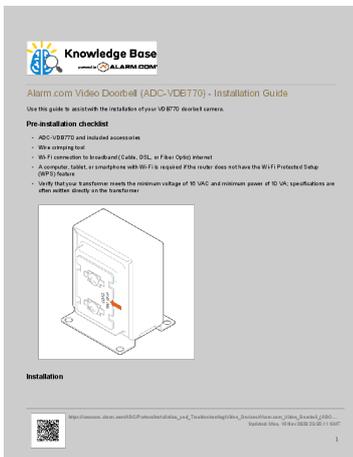


### [\[pdf\] Installation Guide Troubleshooting Guide Specifications Guide Accessories](#)

Alarm Video Doorbell ADC VDB770 Installation Guide Install Dated 11 16 2020 Grid alarm com adc vdb770 install guide dated 1605569802 d1unzhqf5a606m cloudfront net documents |||

Alarm.com Video Doorbell **ADC-VDB770** - Installation Guide Use this guide to assist with the installation of your VDB770 doorbell camera. Pre-installation checklist **ADC-VDB770** and included accessories Wire crimping tool Wi-Fi connection to broadband Cable, DSL, or Fiber Optic internet A comput...

lang:en score:54 filesize: 249.03 K page\_count: 11 document date: 0000-00-00

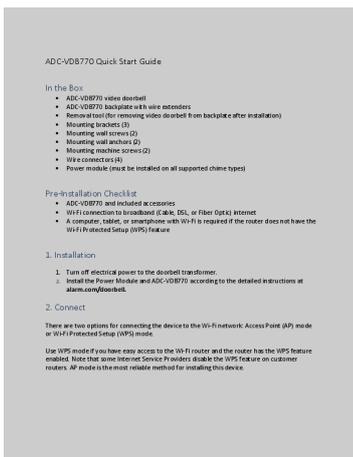

### [\[pdf\] User Manual Quick Start Guide Installation Guide Instructions Guide Accessories](#)

Scott Pourshalchi ADC VDB770 Quick Start Guide In the Box Pre Installation video doorbell backplate with wire extenders Removal tool for removing from after Users Manual Alarm com ylvdb770 ex 1 5 electric garden alarm y16 manuals

**ADC-VDB770** Quick Start Guide In the Box **ADC-VDB770** video doorbell **ADC-VDB770** backplate with wire extenders Removal tool for removing video doorbell from backplate after installation Mounting brackets 3 Mounting wall screws 2 Mounting wall anchors 2 Mounting machine screws 2 Wire co...

lang:en score:54 filesize: 380.83 K page\_count: 15 document date: 2020-08-10



[\[pdf\]](#) Installation Guide Troubleshooting Guide Specifications Guide Accessories Alarm Video Doorbell ADC VDB770 Installation Guide installation guide WiFi v 1711388845 cdn shopify s files 1659 9809 ||| Alarm.com Video Doorbell **ADC-VDB770** - Installation Guide Use this guide to assist with the installation of your **ADC-VDB770** doorbell camera. Pre-installation checklist Media, iframe, embed and object tags are not supported inside of a PDF. Important: A Video Analytics service package and the Doorbe... lang:en score:54 filesize: 242.99 K page\_count: 15 document date: 0000-00-00



[Alarm.com Video Doorbell ADC-VDB770 Installation Guide](#) This guide provides step-by-step instructions for installing the Alarm.com Video Doorbell (ADC-VDB770), covering pre-installation checks, power module setup, doorbell mounting, network configuration via AP or WPS, account enrollment, and troubleshooting tips. lang:en score:53 filesize: 256.64 K page\_count: 12 document date: 0000-00-00




[\[pdf\]](#) User Manual Installation Guide Troubleshooting Guide Specifications Guide Accessories Alarm Video Doorbell ADC VDB770 Installation Guide Touchless HD AAA Smart Home smarthome calstate aaa content install guide files video doorbell ||| Touchless HD Video Doorbell Installation Manual Installation Support: 877 998-1457 AAA.com/SmartHome-Install Alarm.com Video Doorbell **ADC-VDB770** - Installation Guide Use this guide to assist with the installation of your VDB770 doorbell camera. Pre-installation checklist Media, iframe, embed a... lang:en score:53 filesize: 378.11 K page\_count: 16 document date: 2022-06-09



[\[pdf\]](#) Installation Guide Troubleshooting Guide Specifications Guide Accessories Alarm Video Doorbell ADC VDB770 Installation Guide 1 24incontrol 2021 01 ||| Alarm.com Video Doorbell **ADC-VDB770** - Installation Guide Use this guide to assist with the installation of your VDB770 doorbell camera. Pre-installation checklist **ADC-VDB770** and included accessories Wire crimping tool Wi-Fi connection to broadband Cable, DSL, or Fiber Optic internet A comput... lang:en score:53 filesize: 339.13 K page\_count: 11 document date: 2021-01-27



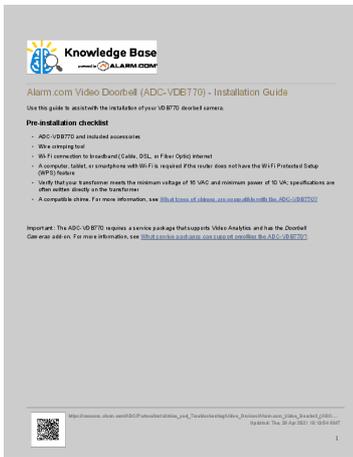

[pdf] [Installation Guide](#) [Troubleshooting Guide](#) [Specifications Guide](#) [Accessories](#)

Alarm Video Doorbell ADC VDB770 Installation Guide hf files oregon s3 amazonaws hdptrueprotection kb attachments 2021 04 29 5542af95 c1c7 4f59 a1f6 db36a6c03534 |||

Alarm.com Video Doorbell **ADC-VDB770** - Installation Guide Use this guide to assist with the installation of your VDB770 doorbell camera. Pre-installation checklist **ADC-VDB770** and included accessories Wire crimping tool Wi-Fi connection to broadband Cable, DSL, or Fiber Optic internet A comput...

lang:en score:47 filesize: 255.27 K page\_count: 12 document date: 0000-00-00



[pdf] [Installation Guide](#) [Troubleshooting Guide](#) [Specifications Guide](#) [Accessories](#) [Catalog](#)

Alarm Video Doorbell ADC VDB770 Installation Guide 13 set 2023 — A computer tablet or smartphone with Wi Fi is required if the router does not have Protected Setup WPS feature snapav wcsstore ExtendedSitesCatalogAssetStore attachments documents Surveillance ManualsAndGuides |||

Alarm.com Video Doorbell **ADC-VDB770** - Installation Guide Use this guide to assist with the installation of your **ADC-VDB770** doorbell camera. Pre-installation checklist Media, iframe, embed and object tags are not supported inside of a PDF. Important: A Video Analytics service package and the Doorbe...

lang:en score:45 filesize: 243.01 K page\_count: 15 document date: 0000-00-00




[pdf] [User Manual](#) [Quick Start Guide](#) [Installation Guide](#) [Guide](#)

VDB770 guide insert7 indd User Manual QSG Alarm Incorporated VDB770X YL6VDB770X vdb770x Video Doorbell Installation Guide **ADC-VDB770** Scan QR code to navigate to:

alarm.com/doorbell/install 8281 Greensboro Drive Suite 100 Tysons, VA 22102 2021 Alarm.com. All rights reserved. Designed in the USA by Alarm.com. Made in Thailand. 210106 Product installation height should be less than 2...

lang:en score:43 filesize: 407.81 K page\_count: 2 document date: 2021-01-13

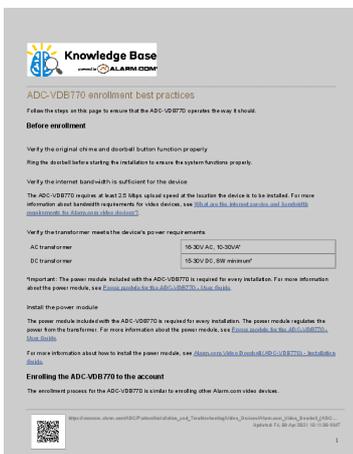

[pdf] [Installation Guide](#)

ADC VDB770 enrollment best practices adc vdb770 alarm dot com video doorbell sep yimg ty cdn yhst 51756635596032 |||

**ADC-VDB770** enrollment best practices Follow the steps on this page to ensure that the **ADC-VDB770** operates the way it should. Before enrollment Verify the original chime and doorbell button function properly Ring the doorbell before starting the installation to ensure the system functions properly. ...


lang:en score:39 filesize: 92.38 K page\_count: 5 document date: 0000-00-00



[pdf] Installation Guide Instructions Troubleshooting Guide Specifications Guide Accessories


Alarm Video Doorbell ADC VDB750 Installation Guide Instructions Alarm 2MP Wi Fi Camera Black and White LA Assembly Instructions cdn.adiglobaldistribution.us/pim/Original/10059/LA/Instructions/installationguide/Installation%20Instructions/ALARM%20COM%20Design%20Studio%20Series%20WiFi%20Cam%20PAM%20Distributing%20Co/Alarm%20Whiteadc%20vdb750%20alarm%20dot%20com%20video%20doorbell%20camera%20guide/e128efa6415e47748b54a257ea133103/LA/shopify/s/files/1/04788893adc\_a257ea133103\_v1719498148/cdn/||| Alarm.com Video Doorbell ADC-VDB750 - Installation Guide Pre-installation checklist ADC-VDB750 with included accessories Wired doorbell transformer recommended 16VAC 10VA or power supply minimum 15VDC 8W ; specifications are often written d

Alarm.com Video Doorbell ADC-VDB750 - Installation Guide Pre-installation checklist ADC-VDB750 wi... mer rating is 16VAC 10VA. 2. Remove any existing power module from the in-home chime from previous **ADC-VDB770** installations with mechanical or digital chimes or from Slim Line installations with a di... lang:en score:39 filesize: 391.23 K page\_count: 14 document date: 2023-07-17

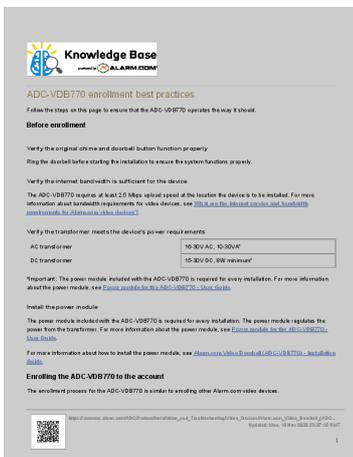

[pdf] Installation Guide


ADC VDB770 enrollment best practices Alarm Enrollment Best Practices Dated 11 16 2020 Grid alarm com adc vdb770 dated 1605569900 d1unzhqf5a606m cloudfront net documents ||| **ADC-VDB770** enrollment best practices Follow the steps on this page to ensure that the **ADC-VDB770** operates the way it should. Before enrollment Verify the original chime and doorbell button function properly Ring the doorbell before starting the installation to ensure the system functions properly. ... lang:en score:38 filesize: 88.72 K page\_count: 4 document date: 0000-00-00

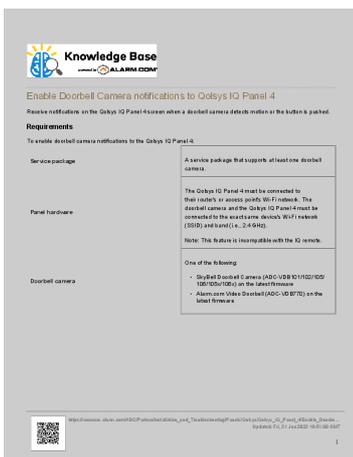

[pdf] User Manual Troubleshooting Guide

Enable Doorbell Camera notifications to Qolsys IQ Panel 4 21 janv 2022 — Alarm Video ADC VDB770 on the latest firmware Check with Internet Service Provider or in router s user manual adc vdb770 enable doorbell camera qolsys iq panel grouponerw customcontent attachment ||| Enable Doorbell Camera notifications to Qolsys IQ Panel 4 Receive notifications on the Qolsys IQ Pan... orbell Camera ADC-VDB101/102/105/ 106/105x/106x on the latest firmware Alarm.com Video Doorbell **ADC-VDB770** on the latest firmware https://answers.alarm.com/ADC/Partner/Installation\_and\_Troublesh... lang:en score:38 filesize: 186.9 K page\_count: 4 document date: 0000-00-00



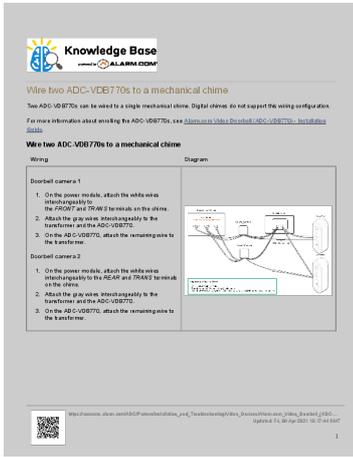


[\[pdf\]](#) Installation Guide Troubleshooting Guide Diagram

Wire two ADC VDB770s to a mechanical chime adc vdb770 alarm dot com video doorbell wire doorbells sep ying ty cdn yhst 51756635596032 |||

Wire two **ADC-VDB770s** to a mechanical chime Two **ADC-VDB770s** can be wired to a single mechanical chime. Digital chimes do not support this wiring configuration. For more information about enrolling the **ADC-VDB770s**, see Alarm.com Video Doorbell **ADC-VDB770** - Installation Guide. Wire two **ADC-VDB770s**...

lang:en score:37 filesize: 195.06 K page\_count: 1 document date: 0000-00-00

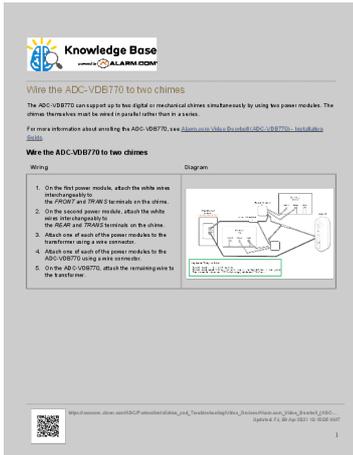

[\[pdf\]](#) Installation Guide Troubleshooting Guide Diagram

Wire the ADC VDB770 to two chimes adc vdb770 s alarm dot com video doorbell wire sep ying ty cdn yhst 51756635596032 |||

Wire the **ADC-VDB770** to two chimes The **ADC-VDB770** can support up to two digital or mechanical chimes simultaneously by using two power modules. The chimes themselves must be wired in parallel rather than in a series. For more information about enrolling the **ADC-VDB770**, see Alarm.com Video Doorbell ...

lang:en score:37 filesize: 252.28 K page\_count: 1 document date: 0000-00-00



[\[pdf\]](#) Guide

ADCVDB770 USER GUIDE alarmesentinelles |||

**ADC-VDB770 User Experience JOB AID VIDEO DOORBELL CONFIGURATION BEST PRACTICES** For recordings upon button press, create a Doorbell Call Recording Rule using the Customer Website. Video Add New Rule Doorbell Call Rule One Video Analytics recording rule per device. Only Ground Zone rules can ...

lang:en score:37 filesize: 428.75 K page\_count: 1 document date: 2022-06-20

**Knowledge Base**  
powered by **ALARM.COM**

### Package Alerts for the Alarm.com Video Doorbell (ADC-VDB770)

Be the first to know when a package is delivered to your home or business with Package Alerts for the Alarm.com Video Doorbell (ADC-VDB770). Using Video Analytics, the ADC-VDB770 can identify when a visitor leaves a parcel on your doorstep— notifying you immediately.

Package Alerts can be configured to notify you right when a delivery is made, identify you if the box is not opened up, or alert you if it goes missing. The feature can be set up in seconds from the Recording Rules section of the Alarm.com customer website and Alarm.com app.

For more information about configuring a Video Analytics rule, see [Configure a Video Analytics rule](#).

For more information about configuring a Video Analytics rule, see [Configure a Video Analytics rule](#).

**Features details**

- Quick and easy set up as part of any ADC-VDB770 recording rule
- Separate notifications for when the package is delivered and removed
- Can be configured for SMS, email and push notifications
- A delivery notification in a package alert with a thumbnail of the parcel
- A removal notification in a parcel alert with a thumbnail of the individual
- Package events are searchable on the CSV and 24/7 Observed Recording timeline, as well as Saved Clips
- Clips of package delivery and removal events can be easily viewed in Highlights

**Turn on/configure Package Alerts for the ADC-VDB770**

Note: Package Alerts will not trigger unless a person is detected.

People detection recording rules are automatically created when a doorbell is installed, but they are turned off by default. You can turn on and configure these recording rules by using Package Alerts through the Alarm.com customer website and Alarm.com app.

**Important:** To remove the awareness of Package Alerts for the ADC-VDB770, the minimum delay between Video Analytics notifications is set to 30 seconds. If this setting is changed (if any negative) after the awareness value of the feature.

Export all

[https://www.alarm.com/customer-website\\_and\\_App/VideoAnalytics\\_3rdPartyPackageAlerts\\_for\\_the\\_Alarm.com\\_Video\\_Doorbell\\_ADC-VDB770](https://www.alarm.com/customer-website_and_App/VideoAnalytics_3rdPartyPackageAlerts_for_the_Alarm.com_Video_Doorbell_ADC-VDB770)

[pdf]

Package Alerts for the Alarm Video Doorbell ADC VDB770 answers alarm @api deki pages 34703 ||| Package Alerts for the Alarm.com Video Doorbell **ADC-VDB770** Be the first to know when a package is delivered to your home or business with Package Alerts for the Alarm.com Video Doorbell **ADC-VDB770** . Using Video Analytics, the **ADC-VDB770** can identify when a visitor leaves a parcel on your doorstep...

lang:en score:37 filesize: 682.68 K page\_count: 7 document date: 0000-00-00

**Knowledge Base**  
powered by **ALARM.COM**

### Adjust the chime type for the ADC-VDB770

Configure the ADC-VDB770 chime type to match the alarm connected to the device. There is an option to select no chime.

Note: On firmware version 2052, the chime type can be selected during AP mode Wi-Fi setup. If the option does not appear during AP mode, adjust the chime type after enrollment. For more information about AP mode, see [Alarm.com 24/7 Observed Recording Timeline](#).

**To adjust the chime type using the Partner Portal**

1. Log into the Partner Portal
2. Find the customer account
3. C&B Equipment
4. C&B Video Devices
5. Using the Main Device dropdown menu, select the desired video device
6. Using the Chime Type dropdown menu, select the appropriate chime

**To adjust the chime type using the Customer Website**

1. Log into the Customer Website
2. C&B Video
3. C&B Settings
4. Using the Main Device dropdown menu, select the desired video device
5. C&B Video Device Info
6. Using the Chime Type dropdown menu, select the appropriate chime type. For more information about identifying whether the device the ADC-VDB770 is connected to, see [How to Identify the Device Connected to the ADC-VDB770](#)
7. C&B Save

**To adjust the chime type using the Customer app**

1. Log into the Customer app
2. Tap Me
3. Tap Doorbell Camera
4. Tap ⚙️

Media, theme, embed and object tags are not supported inside of a PDF.

Export all

[https://www.alarm.com/customer-website\\_and\\_App/VideoAnalytics/Video\\_Doorbell\\_ADC-VDB770](https://www.alarm.com/customer-website_and_App/VideoAnalytics/Video_Doorbell_ADC-VDB770)

[pdf] Installation Guide

Adjust the chime type for ADC VDB770 adc vdb770 alarm dot com video doorbell adjust sep yimg ty cdn yhst 51756635596032 |||

Adjust the chime type for the **ADC-VDB770** Configure the **ADC-VDB770** chime type to match the chime connected to the device. There is an option to select no chime.

Note: On firmware version 2052 , the chime type can be selected during AP mode Wi-Fi setup. If the option does not appear during AP mode, ad...

lang:en score:37 filesize: 75.66 K page\_count: 2 document date: 0000-00-00

**Knowledge Base**  
powered by **ALARM.COM**

**24incontrol**

### Reconnect an ADC-VDB770 if the wireless network or router changes

If the ADC-VDB770 disconnects from the user's network due to networking hardware replacement (e.g., a new router or access point) or Wi-Fi settings change, reconnect the device using AP mode or WPS.

**Reconnect the ADC-VDB770 to a wireless network**

Export all

**To reconnect the ADC-VDB770 using AP mode:**

1. The camera is in Access Point (AP) mode when the button LED is blinking white. If necessary, access AP mode by holding down the doorbell button for 30-40s and release when the LED turns to blinking white.
2. Using a Wi-Fi enabled device (e.g., smartphone or computer), find and connect to the camera's network. The SSID should have the format ADC-VDB770 (XX-YY-ZZ) where XX-YY-ZZ is the last 6 characters of the MAC address, which is printed on the included reference card.
3. On the same device, open a web browser and enter <http://192.168.1.1> in the web address field. Follow the on-screen instructions to add the ADC-VDB770 to the Wi-Fi network. Verify the LED turns solid green, indicating the connection is complete.

Media, theme, embed and object tags are not supported inside of a PDF.

**To reconnect the ADC-VDB770 using WPS:**

Note: Use WPS mode if you have easy access to the Wi-Fi router and the router has the WPS feature enabled. Note that some Internet Service Providers disable the WPS feature on customer routers. AP mode is the most reliable method for readding this device.

1. After the boot process is complete (the camera's LED will be blinking white), hold down the doorbell button for 30-50s and release when the LED begins to blink blue.
2. Activate WPS Mode on the router. The router will begin to connect to the Wi-Fi network. Verify the LED turns to solid green, indicating the connection is complete.

Media, theme, embed and object tags are not supported inside of a PDF.

Export all

[https://www.alarm.com/customer-website\\_and\\_App/VideoAnalytics/Video\\_Doorbell\\_ADC-VDB770](https://www.alarm.com/customer-website_and_App/VideoAnalytics/Video_Doorbell_ADC-VDB770)

[pdf] Installation Guide Instructions

Reconnect an ADC VDB770 if the wireless network or router changes 24incontrol 2021 01 |||

Reconnect an **ADC-VDB770** if the wireless network or router changes If the **ADC-VDB770** disconnects from the user's network due to networking hardware replacement e.g., a new router or access point or Wi-Fi settings change, reconnect the device using AP mode or WPS. Reconnect the **ADC-VDB770** to a wire...

lang:en score:37 filesize: 174.71 K page\_count: 2 document date: 2023-07-01

**Knowledge Base**  
ALARM.COM

The indoor chime does not make a sound when a guest rings the ADC-VDB770

If the ADC-VDB770 is not ringing the indoor chime when triggered, use the following steps to troubleshoot the behavior.

**Verify the original chime and doorbell button function properly**

Reconnect the original doorbell to the chime to test.

**Verify the LED does not double-blink blue after pressing the button**

Press the doorbell button. If the LED double-blinks blue, see [What to do when the LED on the ADC-VDB770 double-blinks blue](#).

**Verify the installation meets the power and wiring requirements**

**Power requirements**

AC transformer	16-20V AC, 10-20W
DC transformer	10-20V DC, 10W minimum

**Important:** The power module installed with the ADC-VDB770 is required for every installation. For more information about the power module, see [Power module for the ADC-VDB770](#) video guide.

**Wiring the power module**

- Verify the power module's gray wires are connected to the transformer and the ADC-VDB770. No polarity.
- Verify the power module's white wires are connected to the chime's Front/Rear and Trans terminals (or to a 10 Watt 10 Ohm resistor if there is no chime). Testable for polarity.
- For digital chimes, if the indoor chime stops functioning properly after attaching the white wires, reverse the polarity of the wires and test again.

When installing the power module, verify the chime's functionality is unobstructed (e.g., do not attach the power module to a mechanical chime between the chime's plate and device).

For more details about wiring, see [What to do when the LED on the ADC-VDB770 double-blinks blue](#) or [What to do when the LED on the ADC-VDB770 double-blinks blue](#).

**Verify the correct Chime Type is selected**

[https://www.alarm.com/tech-support/faq/ Troubleshooting/Video\\_Doorbell/Video\\_Doorbell\\_VDB770](#)  
Updated: Wed, 14 Oct 2023 01:16:00 GMT

[pdf] Troubleshooting Guide

The indoor chime does not make sound when a guest rings the ADC VDB770 adc vdb770 alarm dot com video doorbell troubleshoot no sep turbifycdn ty cdn yhst 51756635596032 |||

The indoor chime does not make sound when a guest rings the ADCVDB770 If the **ADC-VDB770** is not ringing the indoor chime when triggered, use the following steps to troubleshoot the behavior. Verify the original chime and doorbell button function properly Reconnect the original doorbell to the chime t...

lang:en score:37 filesize: 97.12 K page\_count: 3 document date: 0000-00-00

**Knowledge Base**  
ALARM.COM

**Create a Video Analytics notification for the ADC-VDB770**

Users can create notifications for the Alarm.com Video Doorbell (ADC-VDB770) during its Video Analytics configuration. If the Video Analytics rule is already created, edit the rule to reconfigure notifications.

**Note:** The ADC-VDB770 motion notification is sent to the user immediately when the device identifies a person.

**To create an ADC-VDB770 Video Analytics notification**

**To create an ADC-VDB770 Video Analytics notification using the Customer Website:-**

1. Log into the Customer Website.
2. Click Video.
3. Click Recording Rules.
4. Click New Recording Rule, or click  $\neq$  to edit an existing notification.
5. Click Video Analytics.
6. Click to select the ADC-VDB770.
7. Click Next.
8. In **Notify Recipients**, click to select the desired users to be notified.
9. Configure the rest of the rule as desired. For more information about how to configure a Video Analytics rule, see [Configure a Video Analytics rule](#).
10. Click Save.

**To create an ADC-VDB770 Video Analytics notification using the Customer app:-**

1. Log into the Customer app.
2. Tap Video.
3. Tap  $\neq$ .
4. Tap Recording Rules.
5. Tap Add New Rule, or tap  $\neq$  to edit an existing notification.
6. Tap Video Analytics.
7. Tap to select the ADC-VDB770.

[https://www.alarm.com/tech-support/faq/ Troubleshooting/Video\\_Doorbell/Video\\_Doorbell\\_VDB770](#)  
Updated: Wed, 14 Oct 2023 01:16:00 GMT

[pdf]

Create a Video Analytics notification for the ADC VDB770 24incontrol 2021 01 |||

Create a Video Analytics notification for the **ADC-VDB770** Users can create notifications for the Alarm.com Video Doorbell **ADC-VDB770** during its Video Analytics configuration. If the Video Analytics rule is already created, edit the rule to reconfigure notifications. Note: The **ADC-VDB770** motion noti...

lang:en score:36 filesize: 178.39 K page\_count: 2 document date: 2023-10-18

**Knowledge Base**  
ALARM.COM

**Package Alerts for the Alarm.com Video Doorbell (ADC-VDB770)**

Be the first to know when a package is delivered to your home or business with Package Alerts for the Alarm.com Video Doorbell (ADC-VDB770). Using Video Analytics, the ADC-VDB770 can identify when a visitor leaves a parcel on your doorstep— notifying you immediately.

Package Alerts can be configured to notify you right when a delivery is made, remind you if the box is not picked up, or alert you if a parcel is missing. The feature can be set up in seconds from the Recording Rules section of the Alarm.com customer website and Alarm.com app.

For more information about configuring a Video Analytics rule, see [Configure a Video Analytics rule](#).

**ALARM.COM** NOW

My Home: Doorbell Camera detected a package at 5:30 pm.

**Feature details**

- Quick and easy set up as part of any ADC-VDB770 recording rule
- Separate notifications for when the package is delivered and removed
  - Can be configured for SMS, email, and push notifications
  - A delivery notification is a package alert with a thumbnail of the parcel
  - A removal notification is a person alert with a thumbnail of the individual
- Customize notifications to receive alerts if a parcel is not collected within a certain timeframe
  - Delay duration options include 2, 3, 4, 5, 10, or 15 minutes

**Note:** To ensure the timeliness of Package Alerts for the ADC-VDB770, the minimum delay between Video Analytics notifications is set to 30 seconds. If this setting is changed it may negatively affect the awareness value of the feature.

- Package events are searchable on the DVR and 24/7 Onboard Recording Timelines, as well as Saved Clips
- Clips of package delivery and removal events can be easily viewed in Highlights

[https://www.alarm.com/tech-support/faq/ Troubleshooting/PackageAlerts/Alerts\\_for\\_the\\_Alarm.com\\_VDB770](#)  
Updated: Wed, 02 Aug 2023 21:26:00 GMT

[pdf]

Package Alerts for the Alarm Video Doorbell ADC VDB770 Save as Knowledge Base answers alarm @api deki pages 34703 stylesheet default |||

Package Alerts for the Alarm.com Video Doorbell **ADC-VDB770** Be the first to know when a package is delivered to your home or business with Package Alerts for the Alarm.com Video Doorbell **ADC-VDB770** . Using Video Analytics, the **ADC-VDB770** can identify when a visitor leaves a parcel on your doorstep...

lang:en score:36 filesize: 199.94 K page\_count: 3 document date: 0000-00-00





[pdf] Troubleshooting Guide

Interact with visitors and devices using the ADC VDB770 call screen adc vdb770 alarm dot com video doorbell interact sep yimg ty cdn yhst 51756635596032 |||

Interact with visitors and devices using the **ADC-VDB770** call screen Users can talk to individuals at their door using the Customer app or a Qolsys IQ Panel 2. Additionally, users can control their security system, locks, access control doors, garage doors, and lights all from the live video call scr...

lang:en score:33 filesize: 139.2 K page\_count: 3 document date: 0000-00-00



[pdf] Installation Guide Specifications Guide Accessories

Alarm Video Doorbell ADC VDB750 Installation Guide answers alarm @api deki pages 32438 ||| 1 Alarm.com Video Doorbell ADC-VDB750 - Installation Guide Pre-installation checklist ADC-VDB75 ... mer rating is 16VAC 10VA. 2. Remove any existing power module from the in-home chime from previous **ADC-VDB770** installations with mechanical or digital chimes or from Slim Line installations with a di...

lang:en score:33 filesize: 392.23 K page\_count: 15 document date: 0000-00-00




[pdf] Installation Guide Troubleshooting Guide Specifications Guide Accessories

Alarm Video Doorbell ADC VDB750 Installation Guide TVC mechanical or digital chimes from Slim Line installations with a chime blink white about 35 seconds 2 On an Internet enabled device User guide cdn tvc mx media 1370638 |||

Alarm.com Video Doorbell ADC-VDB750 - Installation Guide Pre-installation checklist ADC-VDB750 wi ... mer rating is 16VAC 10VA. 2. Remove any existing power module from the in-home chime from previous **ADC-VDB770** installations with mechanical or digital chimes or from Slim Line installations with a di...

lang:en score:33 filesize: 391.2 K page\_count: 14 document date: 0000-00-00

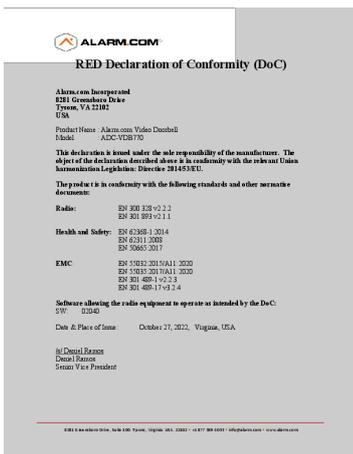

[pdf] Declaration of Conformity

Microsoft Word RED DoC ADC VDB770 jlabossiere alarm about international doc Alarm Video Doorbell CE |||

RED Declaration of Conformity DoC Alarm.com Incorporated 8281 Greensboro Drive Tysons, VA 22102 USA Product Name : Alarm.com Video Doorbell Model : **ADC-VDB770** This declaration is issued under the sole responsibility of the manufacturer. The object of the declaration described above is in conf...

lang:en score:33 filesize: 229.13 K page\_count: 1 document date: 2022-10-27



[pdf] Installation Guide Troubleshooting Guide Specifications Guide Accessories

Alarm Video Doorbell ADC VDB750 Installation Guide answers alarm@api.deki.pages.32438.stylesheet.default|||

Alarm.com Video Doorbell ADC-VDB750 - Installation Guide Pre-installation checklist ADC-VDB750 wi... mer rating is 16VAC 10VA. 2. Remove any existing power module from the in-home chime from previous **ADC-VDB770** installations with mechanical or digital chimes or from Slim Line installations with a di...

lang:en score:32 filesize: 390.83 K page\_count: 14 document date: 0000-00-00



[pdf] Installation Guide Specifications Guide Accessories

Alarm Video Doorbell ADC VDB750 Installation Guide Advanced Security LLC advancedsecurityllc 2023 04|||

Alarm.com Video Doorbell ADC-VDB750 - Installation Guide Pre-installation checklist Important: A V... mer rating is 16VAC 10VA. 2. Remove any existing power module from the in-home chime from previous **ADC-VDB770** installations with mechanical or digital chimes or from Slim Line installations with a di...

lang:en score:32 filesize: 418.2 K page\_count: 15 document date: 0000-00-00



[pdf]


adc vdb770 bz alarm dot com video doorbell user experience sep turbifycdn ty cdn yhst 51756635596032

|||

**ADC-VDB770 User Experience JOB AID VIDEO DOORBELL CONFIGURATION BEST PRACTICES** For recordings upon button press, create a Doorbell Call Recording Rule using the Customer Website. Video Add New Rule Doorbell Call Rule One Video Analytics recording rule per device. Only Ground Zone rules can ...

lang:en score:32 filesize: 450.13 K page\_count: 1 document date: 2020-11-17



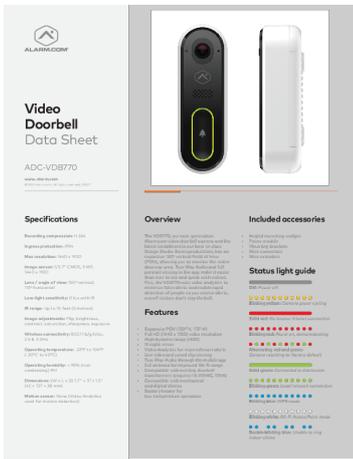

[pdf] User Manual Specifications Datasheet Dimension Guide Accessories

VDB770 data sheet12 indd Product Data SheetAlarm ADC VDB770Upload LA VDB770S

ProductManualcdn adiglobaldistribution us pim Original 10046 Upload ProductManual SheetProduct

VDB770Alarm ProductManualUpload VDB770BZ ||| ||| Video Doorbell Data Sheet ADC-VDB770

www.alarm.com 2021 Alarm.com. All rights reserved. 210211 Specifications Recording compression:

H.264 Ingress protection: IPX4 Max resolution: 1440 x 1920 Image sensor: 1/2.7 CMOS, 5 MP, 1440 x 1920 Lens

Video Doorbell Data Sheet **ADC-VDB770** www.alarm.com 2021 Alarm.com. All rights

reserved. 210211 Specifications Recording compression: H.264 Ingress protection:

IPX4 Max resolution: 1440 x 1920 Image sensor: 1/2.7 CMOS, 5 MP, 1440 x 1920

Lens / angle of view: 150 vertical, 115 horizontal Low-light ...

lang:en score:31 filesize: 566.73 K page\_count: 1 document date: 2021-02-11



[pdf] Specifications Datasheet Dimension Guide Accessories

VDB770\_data\_sheet12 indd Video Doorbell Data Sheet adc-vdb770-alarm-dot-com-video-doorbell-data-

sheet sep yimg ty cdn yhst-51756635596032


Video Doorbell Data Sheet **ADC-VDB770** www.alarm.com 2021 Alarm.com. All rights

reserved. 210211 Specifications Recording compression: H.264 Ingress protection:

IPX4 Max resolution: 1440 x 1920 Image sensor: 1/2.7 CMOS, 5 MP, 1440 x 1920

Lens / angle of view: 150 vertical, 115 horizontal Low-light ...

lang:en score:31 filesize: 566.73 K page\_count: 1 document date: 2021-02-11

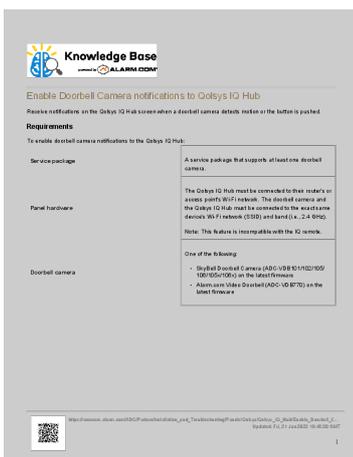

[pdf] Troubleshooting Guide

Enable Doorbell Camera notifications to Qolsys IQ Hub adc vdb770 enable doorbell camera qolsys iq hub

grouponenw customcontent attachment |||

Enable Doorbell Camera notifications to Qolsys IQ Hub Receive notifications on the

Qolsys IQ Hub scr ... orbell Camera ADC-VDB101/102/105/ 106/105x/106x on the

latest firmware Alarm.com Video Doorbell **ADC-VDB770** on the latest firmware

https://answers.alarm.com/ADC/Partner/Installation\_and\_Troublesh...

lang:en score:31 filesize: 186.75 K page\_count: 4 document date: 0000-00-00



[\[pdf\]](#) Installation Guide Troubleshooting Guide Specifications Guide Accessories Alarm Video Doorbell ADC VDB750 Installation Guide Connect device to wallplate by first securing latching the top edge then pushing into and lastly bottom set screw with a screwdriver 9 Restore power doorbell circuit transformer Physical installation Slim Line II replacement adc vdb750 alarm dot com video camera guide sep turbifycdn ty cdn yhst 51756635596032 |||

Alarm.com Video Doorbell ADC-VDB750 - Installation Guide Pre-installation checklist ADC-VDB750 wi ... mer rating is 16VAC 10VA. 2. Remove any existing power module from the in-home chime from previous **ADC-VDB770** installations with mechanical or digital chimes or from Slim Line installations with a di...

lang:en score:31 filesize: 391.23 K page\_count: 14 document date: 0000-00-00



[\[pdf\]](#) Specifications Datasheet Dimension Guide Accessories VDB770 data sheet9 indd Video Doorbell Data Sheet Nelly s Security 39 Go Design alarm © 2020 Alarm All rights reserved 200921 Overview The our next generation video doorbell camera and the Nellyssecurity adc vdb770 nellyssecurity pub media products specsheets |||

Video Doorbell Data Sheet **ADC-VDB770** www.alarm.com 2020 Alarm.com. All rights reserved. 200921 Specifications Recording compression: H.264 Ingress protection: IPX4 Max resolution: 1440 x 1920 Image sensor: 1/2.7 CMOS, 5 MP, 1440 x 1920 Lens / angle of view: 150 vertical, 115 horizontal Low-light ...

lang:en score:29 filesize: 570.45 K page\_count: 1 document date: 2021-02-16