

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

- › [Duravit](#) /
- › [Duravit Geberit 111.335.00.5 DuoFix In-Wall System User Manual](#)

Duravit 111335005

Duravit Geberit DuoFix In-Wall System with Sigma Concealed Tank

Model: 111.335.00.5

PRODUCT OVERVIEW

The Duravit Geberit 111.335.00.5 DuoFix In-Wall System is designed for use with wall-hung toilets, providing a concealed tank solution for modern bathroom aesthetics. This system integrates the toilet tank and support frame within the wall, resulting in a clean, minimalist appearance with no visible pipework. It is specifically engineered for installation in 2x6 inch wall constructions.

The system supports a dual-flush mechanism, contributing to water efficiency, and is compatible with various wall-hung toilet bowls, offering flexibility in design choices.

SETUP AND INSTALLATION

Proper installation of the Geberit DuoFix In-Wall System is crucial for its functionality and longevity. This system is designed for installation within wood or steel stud walls that provide support equivalent to a 2x6 inch (5.5-inch) depth.

Key Installation Considerations:

- **Wall Framing:** Ensure the wall framing is adequately prepared to accommodate the system's dimensions (approximately 5.5"D x 19.75"W x 49"H). Doubling up studs on the sides can enhance stability.
- **Compatibility:** The system is designed for 2-hole wall-hung wash-down WCs with 7.1-inch or 9.1-inch fastening distances. It fits toilet heights ranging from 15 to 19 inches.
- **Required Additional Components:** The in-wall system does not include all necessary components for a complete toilet installation. Users must acquire:
 - An actuator plate (flush plate) – available in various styles and colors.
 - Acoustic insulation bowl connection set (e.g., Geberit 156.050.00.1) to reduce sound transmission.
 - Connecting pipes and other plumbing accessories as required by local codes and specific toilet bowl.

For detailed step-by-step instructions, please refer to the official [Installation Manual \(PDF\)](#) provided by the manufacturer. It is highly recommended to consult this document and, if necessary, professional plumbing resources or videos for proper installation.







Figure 1: The Geberit DuoFix In-Wall System, showing the blue metal frame, white concealed tank, and connection points for a wall-hung toilet. This image illustrates the primary components of the system before installation within a wall.

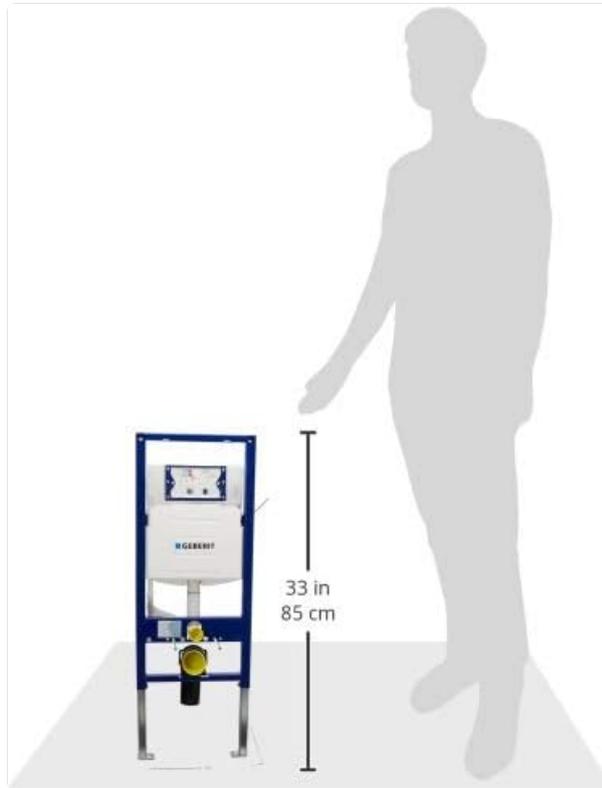


Figure 2: A diagram illustrating the approximate height of the Geberit DuoFix In-Wall System (33 inches or 85 cm) relative to a human figure, providing a sense of scale for installation planning.

OPERATING INSTRUCTIONS

The Geberit DuoFix In-Wall System operates in conjunction with a compatible wall-hung toilet bowl and an actuator plate (flush plate).

- **Dual Flush Mechanism:** The system features a dual-flush mechanism, allowing users to select between a full flush (1.6 Gallons per Flush - GPF) and a reduced flush volume for liquid waste. This promotes water conservation. The specific operation of the dual flush is controlled by the design of the chosen actuator plate.
- **Adjustable Height:** The system includes height-adjustable feet, allowing for customization of the toilet bowl height during installation to suit personal preference and accessibility requirements.

MAINTENANCE

The concealed nature of the Geberit DuoFix system simplifies external cleaning, as there is no visible tank or pipework. Maintenance of the internal components is facilitated through the actuator plate opening.

- **Access to Internal Components:** The internal tank components, such as the fill valve and flush valve, are accessible by removing the actuator plate. This design allows for inspection, cleaning, or replacement of parts without needing to open the wall.
- **Regular Cleaning:** While the tank is concealed, regular cleaning of the toilet bowl and the visible actuator plate is

recommended using standard bathroom cleaning agents. Avoid abrasive cleaners on the actuator plate.

TROUBLESHOOTING

Should you encounter issues with your Geberit DuoFix In-Wall System, consider the following common troubleshooting steps:

- **Continuous Running Water:** If water continuously runs into the toilet bowl, this often indicates an issue with the flush valve or fill valve inside the tank.
 - Remove the actuator plate to access the tank's internal mechanisms.
 - Inspect the flush valve for any obstructions or misalignments that prevent it from sealing properly.
 - Check the fill valve for proper operation and ensure the water level is not too high, causing overflow into the flush mechanism.
- **Incomplete Flush:** If the toilet does not flush effectively, ensure the water supply to the tank is fully open and that the actuator plate is correctly engaging the flush mechanism.
- **Missing or Damaged Parts:** If components appear to be missing or damaged upon receipt or during installation, contact the supplier or manufacturer for assistance. Ensure all required additional components (actuator plate, acoustic insulation, connecting pipes) have been acquired.

For complex issues or if basic troubleshooting does not resolve the problem, it is advisable to consult a qualified plumber or refer to the detailed troubleshooting section in the official installation manual.

SPECIFICATIONS

Feature	Detail
Model Number	111.335.00.5
Brand	Duravit (Geberit System)
Product Dimensions (D x W x H)	5.5"D x 19.75"W x 49"H
Material	Plastic (Tank), Metal (Frame)
Item Weight	8 Pounds
Installation Type	In-Wall (for 2x6 wall construction)
Water Consumption	1.6 Gallons per Flush (GPF)
Flush Type	Dual Flush
Compatible Toilet Heights	15-inch to 19-inch
Supports Weight Up To	880 pounds
Included Components	Carrier, Tank
UPC	020535449976

WARRANTY AND SUPPORT

The Duravit Geberit 111.335.00.5 DuoFix In-Wall System comes with a **5 Year Limited Warranty**. For specific terms and

conditions of the warranty, please refer to the documentation included with your product or contact Geberit customer support.

For further assistance, technical support, or to obtain replacement parts, please refer to the official Geberit website or contact their customer service department. The installation manual also contains valuable information and diagrams that can assist with support inquiries.

© 2024 Duravit. All rights reserved.

Related Documents - 111335005

	<p>Duravit Happy D.2 Wall-Mounted Rimless Toilet - Technical Specifications and Accessories</p> <p>Detailed specifications, dimensions, and accessory information for the Duravit Happy D.2 wall-mounted rimless toilet, including color options, variants, and compatible SensoWash shower-toilet seats.</p>
	<p>Duravit Durafix Mounting Instructions and Product Information</p> <p>Comprehensive mounting instructions and product details for Duravit Durafix wall-mounted toilets, covering installation steps, technical specifications, and multilingual guidance.</p>
	<p>Duravit Vero Toilet Seat and Cover SoftClose Installation Guide</p> <p>Step-by-step instructions for installing the Duravit Vero toilet seat and cover with SoftClose functionality. Includes diagrams and multilingual guidance.</p>
	<p>Duravit Durafix Wall-Mounted Toilet Installation Guide</p> <p>Comprehensive installation guide for the Duravit Durafix wall-mounted toilet system, detailing assembly steps and product identification.</p>
	<p>Duravit DuraStyle Toilet Seat and Cover with Soft Close Installation Guide</p> <p>This document provides installation instructions for the Duravit DuraStyle toilet seat and cover with soft-close functionality. It includes multilingual assembly steps and diagrams.</p>

