

Ceptics PU-200X-WS

Ceptics Travel Voltage Converter User Manual

Model: PU-200X-WS

1. INTRODUCTION AND OVERVIEW


Thank you for choosing the Ceptics Travel Voltage Converter. This device is engineered to provide a safe and reliable power solution for your US-based electronics when traveling to countries with 220V electricity. It efficiently steps down the voltage to 110V, ensuring your devices operate correctly and safely. With multiple charging options, including fast-charging USB ports, it's an essential companion for international travel.

This manual provides detailed instructions for the proper setup, operation, and maintenance of your converter. Please read it thoroughly before use to ensure optimal performance and safety.

2. KEY FEATURES

- Voltage Conversion:** Converts 220V electricity to 110V for safe use of US electronics.
- High Power Output:** Supports devices up to 200 Watts, ideal for curling irons and straighteners.
- Multi-Device Charging:** Features 2 USA input AC outlets and 4 USB ports (1 USB-C with 18W Power Delivery, 3 USB-A 2.4A ports).
- Simultaneous Charging:** Capable of charging up to 6 devices concurrently.
- Global Compatibility:** Includes 6 SWadAPt™ interchangeable plugs (Type A, B, C, E/F, G, I) for use in over 150 countries.
- Advanced Safety Features:** Built-in protections against surge, over current, over temperature, and short circuit. Features a silent fan to prevent overheating.
- Compact and Portable:** Lightweight design (15 ounces) with dimensions of 4.8 x 3.1 x 1 inches, and a 5-foot AC power cable for easy packing.

SmartVoltage™ Technology

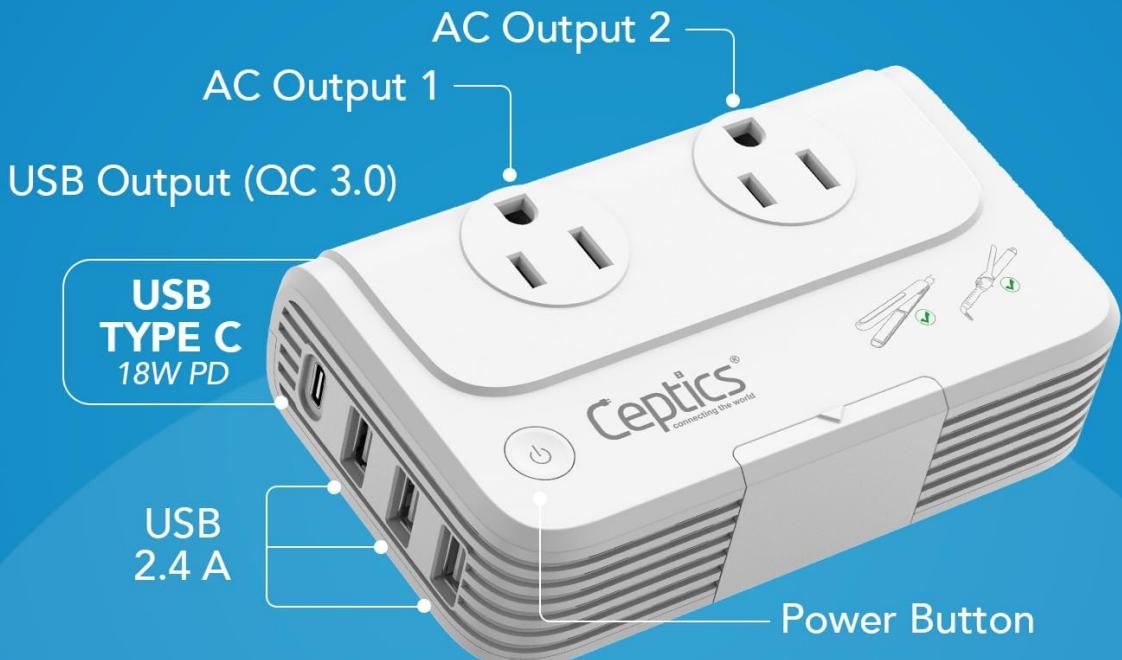

SWadAPt™ Attachments

World Set



Type A



Type B



Type C



Type E/F



Type G



Type I

An annotated diagram of the converter, detailing its SmartVoltage Technology, two AC outputs, four USB outputs (including USB Type-C with 18W PD and USB 2.4A), and the power button. It also shows the six SWadAPt™ plug attachments included in the World Set.

3. PACKAGE CONTENTS

Upon opening your Ceptics Travel Voltage Converter package, please ensure all the following items are present:

- 1 x Ceptics Travel Voltage Converter Unit (Model: PU-200X-WS)
- 1 x AC Power Cable (5 feet)
- 6 x SWadAPt™ International Plug Attachments (Type A, B, C, E/F, G, I)
- 1 x Drawstring Storage Bag



6

SWadAPt™ Attachments

World Set



Type A



Type B



Type C



Type E/F



Type G



Type I

Swap &
Adapt!



Other SWadAPt™ plug attachments sold separately

This image details the six SWadAPt™ plug attachments (Type A, B, C, E/F, G, I) that come with the World Set, illustrating how they can be easily swapped to fit different international outlets.

4. SETUP INSTRUCTIONS

- 1. Identify Local Outlet Type:** Before plugging in the converter, determine the type of electrical outlet used in your destination country. Refer to the included SWadAPt™ plug attachments and select the one corresponding to the local outlet type.
- 2. Attach the Correct Plug:** Connect the selected SWadAPt™ plug attachment to the main converter unit's AC power cable. Ensure it is securely fastened.
- 3. Plug into Wall Outlet:** Insert the converter (with the attached plug) into the wall outlet. The power indicator light on the converter should illuminate, indicating it is receiving power.
- 4. Connect Your Devices:** Plug your US-based electronic devices into the AC outlets or USB ports on the converter.

Important Safety Warning:

- This converter is designed for devices up to **200 Watts**.

- **DO NOT use with high-power appliances** such as hair dryers (unless specifically low-wattage travel models within the 200W limit), electric kettles, coffee makers, or heating appliances. Using incompatible devices can damage the converter and/or the appliance, and poses a safety risk.
- Always check the wattage of your device before plugging it into the converter.



This visual guide clarifies which devices are compatible with the converter, specifically those up to 200 Watts like curling irons and straighteners. It also provides a critical warning against using high-power appliances such as hair dryers, electric kettles, and clothing irons, which can damage the converter or the appliance.


5. OPERATING INSTRUCTIONS

Once the converter is properly set up and plugged into a wall outlet, it is ready for use.

- **Power On/Off:** Press the power button on the converter to turn it on or off. The indicator light will show the power status.
- **Using AC Outlets:** Plug your 110V compatible devices (up to 200W) into the two standard US AC outlets on the converter.
- **Using USB Ports:** Connect your USB-powered devices to the available USB ports. The USB-C port supports 18W Power Delivery for fast charging compatible devices. The three USB-A ports provide 2.4A output for

standard charging.

- **Simultaneous Charging:** You can charge multiple devices (up to 6 total) simultaneously using a combination of AC outlets and USB ports, provided the total wattage does not exceed 200W.

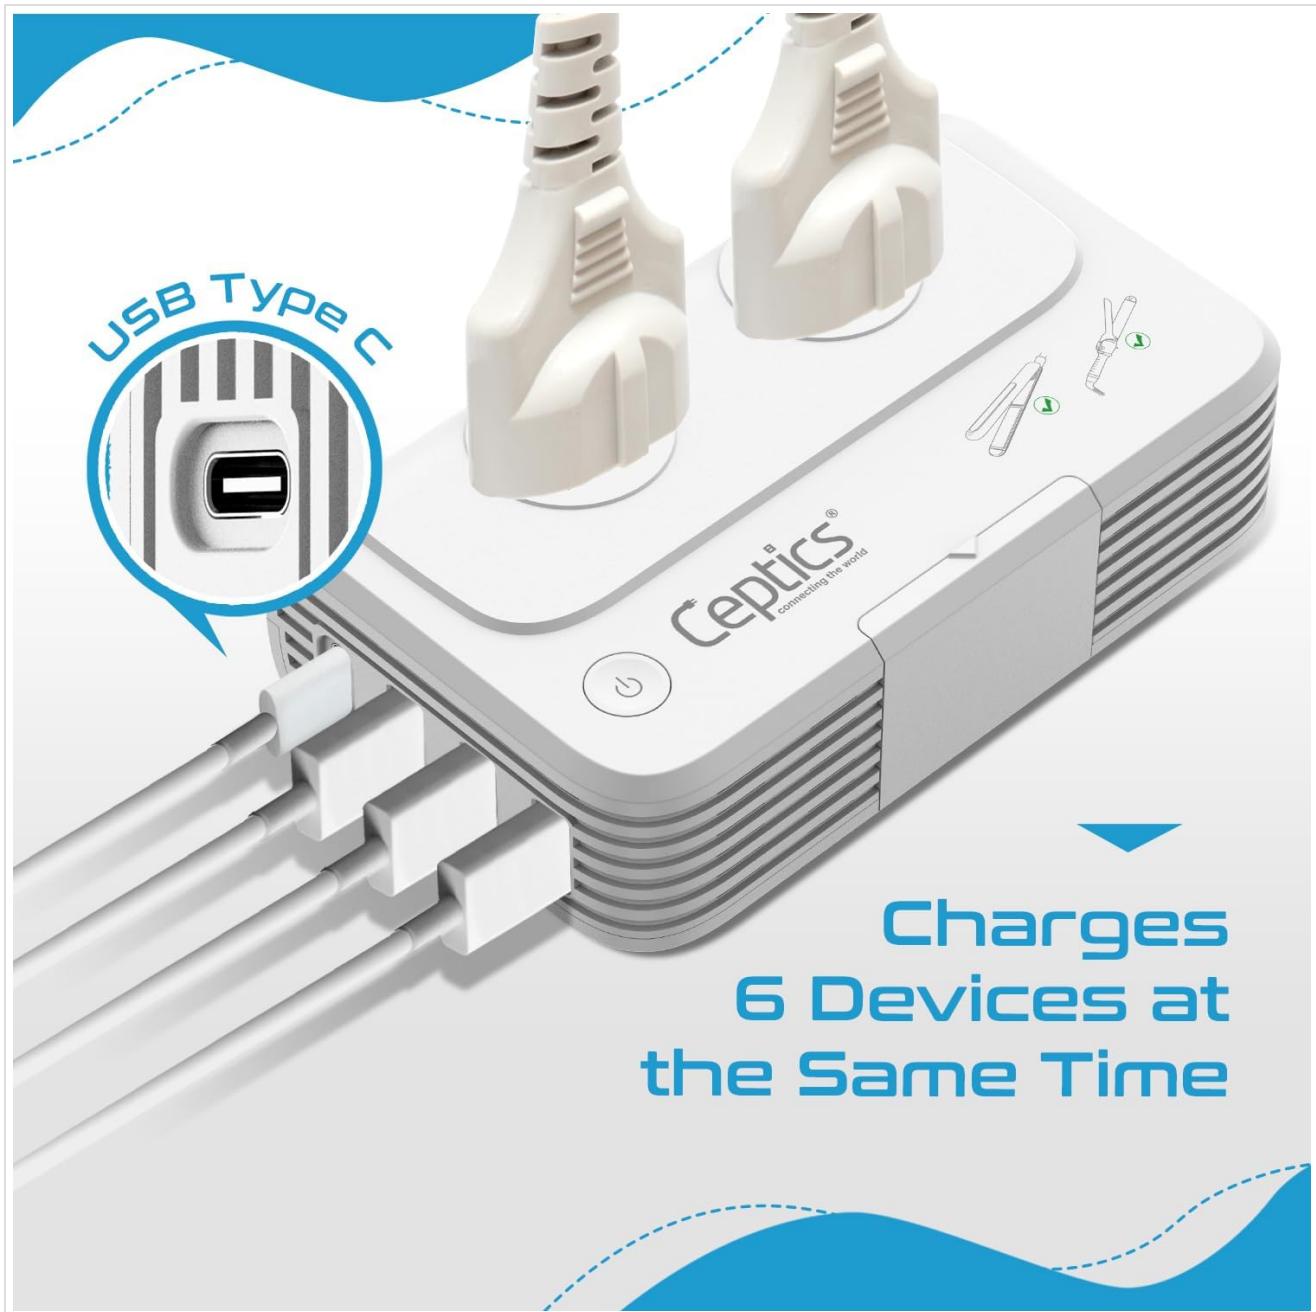

This image demonstrates the converter's ability to charge up to six devices concurrently, utilizing its USB Type-C, USB-A, and AC outlets.

6. MAINTENANCE

To ensure the longevity and optimal performance of your Ceptics Travel Voltage Converter, follow these simple maintenance guidelines:

- **Cleaning:** Disconnect the converter from the power outlet before cleaning. Use a soft, dry cloth to wipe the exterior. Do not use liquid cleaners or abrasive materials.
- **Storage:** When not in use, store the converter and its attachments in the provided drawstring bag in a cool, dry place, away from direct sunlight and moisture.
- **Handling:** Handle the converter with care. Avoid dropping it or subjecting it to strong impacts.
- **Ventilation:** Ensure the converter's ventilation slots are not blocked during operation to prevent overheating.

7. TROUBLESHOOTING

If you encounter issues with your Ceptics Travel Voltage Converter, please refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Converter not powering on.	No power from wall outlet; loose connection; converter malfunction.	Check wall outlet with another device. Ensure all connections (plug attachment, power cable) are secure. Try a different outlet.
Device plugged in turns off or does not work.	Device wattage exceeds 200W; device is not compatible (e.g., high-power appliance); converter's safety protection activated.	Verify your device's wattage is below 200W. Ensure the device is not a high-power appliance (e.g., hair dryer, kettle). Disconnect the device, wait a few minutes, and try again with a compatible device.
USB ports not charging.	Converter not powered on; cable issue; device incompatibility.	Ensure the converter is powered on. Try a different USB cable. Test with another USB device.
Converter feels warm during use.	Normal operation; insufficient ventilation; prolonged high-load use.	Some warmth is normal. Ensure ventilation slots are clear. If excessively hot, disconnect devices and allow to cool. Reduce the number or power of connected devices.

If the problem persists after trying these solutions, please contact Ceptics customer support for further assistance.

8. SPECIFICATIONS

- **Model Number:** PU-200X-WS
- **Product Dimensions:** 4.8 x 3.1 x 1 inches (L x W x H)
- **Item Weight:** 15 ounces
- **Input Voltage:** 100-240V AC (for converter operation)
- **Output Voltage:** 110-120V AC
- **AC Outlets:** 2 x USA Input
- **USB Ports:** 1 x USB Type-C (18W PD), 3 x USB Type-A (2.4A)
- **Max AC Output Power:** 200 Watts
- **Max USB Output Power:** 30 Watts
- **AC Power Cord Length:** 5 feet
- **Included Plug Attachments:** Type A, B, C, E/F, G, I

Product Details



5 YEARS

*This product comes with
5 Years Manufacturing warranty.*



4.9" x 2.9" x 1.2"



- 2 AC Outlet
Input: 100-240V
Output: 110-120V



- 4 SmartVoltage
USB ports
(1 USB C/3 USB A)



- 6x SWadAPt™
(A, B, C, E/F, G, I)



- AC Power Cord
4.16 ft.



- 200W voltage
converter & 30W
USB charger



- 1.34 pounds

This image provides a summary of the product's key details: dimensions (4.9"x2.9"x1.2"), two AC outlets, four SmartVoltage USB ports (1 USB C/3 USB A), six SWadAPt™ attachments (A, B, C, E/F, G, I), a 4.16 ft AC power cord, 200W voltage converter & 30W USB charger, and a weight of 1.34 pounds. It also highlights a 5-year manufacturing warranty.

9. WARRANTY AND SUPPORT

The Ceptics Travel Voltage Converter comes with a **5-Year Manufacturing Warranty**, covering defects in materials and workmanship under normal use. This warranty does not cover damage caused by misuse, accidents, unauthorized modifications, or use with incompatible high-power appliances.

Ceptics is committed to providing high-quality products and excellent customer service. If you have any questions, concerns, or require technical assistance, please do not hesitate to contact our customer support team. We are based in the USA and offer local customer assistance with over 10 years of expertise.

For support, please visit the official Ceptics website or refer to the contact information provided with your product packaging.

