

ASUS ROG Spatha X

ASUS ROG Spatha X Wireless Gaming Mouse User Manual

Model: ROG Spatha X

INTRODUCTION

This manual provides detailed instructions for the ASUS ROG Spatha X Wireless Gaming Mouse. Please read this guide thoroughly before using your device to ensure proper setup, operation, and maintenance. Retain this manual for future reference.

PACKAGE CONTENTS

Verify that all items are present in your package:

- ASUS ROG Spatha X Wireless Gaming Mouse
- Magnetic Charging Stand
- USB-C to USB-A Braided Cable (ROG Paracord)
- USB Wireless Receiver
- Switch Tweezers
- Extra ROG Micro Switches (optional, may vary by region)
- Travel Pouch
- Quick Start Guide
- Warranty Card

PRODUCT OVERVIEW

The ASUS ROG Spatha X is a high-performance wireless gaming mouse designed for precision and customization. It features dual-mode connectivity, a high-DPI optical sensor, and programmable buttons.



Figure 1: Front-side view of the ASUS ROG Spatha X Wireless Gaming Mouse, showcasing its ergonomic design and illuminated ROG logo and scroll wheel.

Key components include:

- **Left/Right Click Buttons:** Main mouse buttons.
- **Scroll Wheel:** For vertical scrolling and as a clickable button.
- **DPI Cycle Button:** Located behind the scroll wheel, for on-the-fly DPI adjustment.
- **Side Buttons:** Up to six programmable buttons on the left side, arranged in a pattern resembling the ROG eye.

- **USB-C Port:** For wired connection and charging.
- **Power/Mode Switch:** Located on the underside, to switch between wired, wireless, and off modes.
- **Optical Sensor:** High-precision 19,000 DPI sensor for accurate tracking.

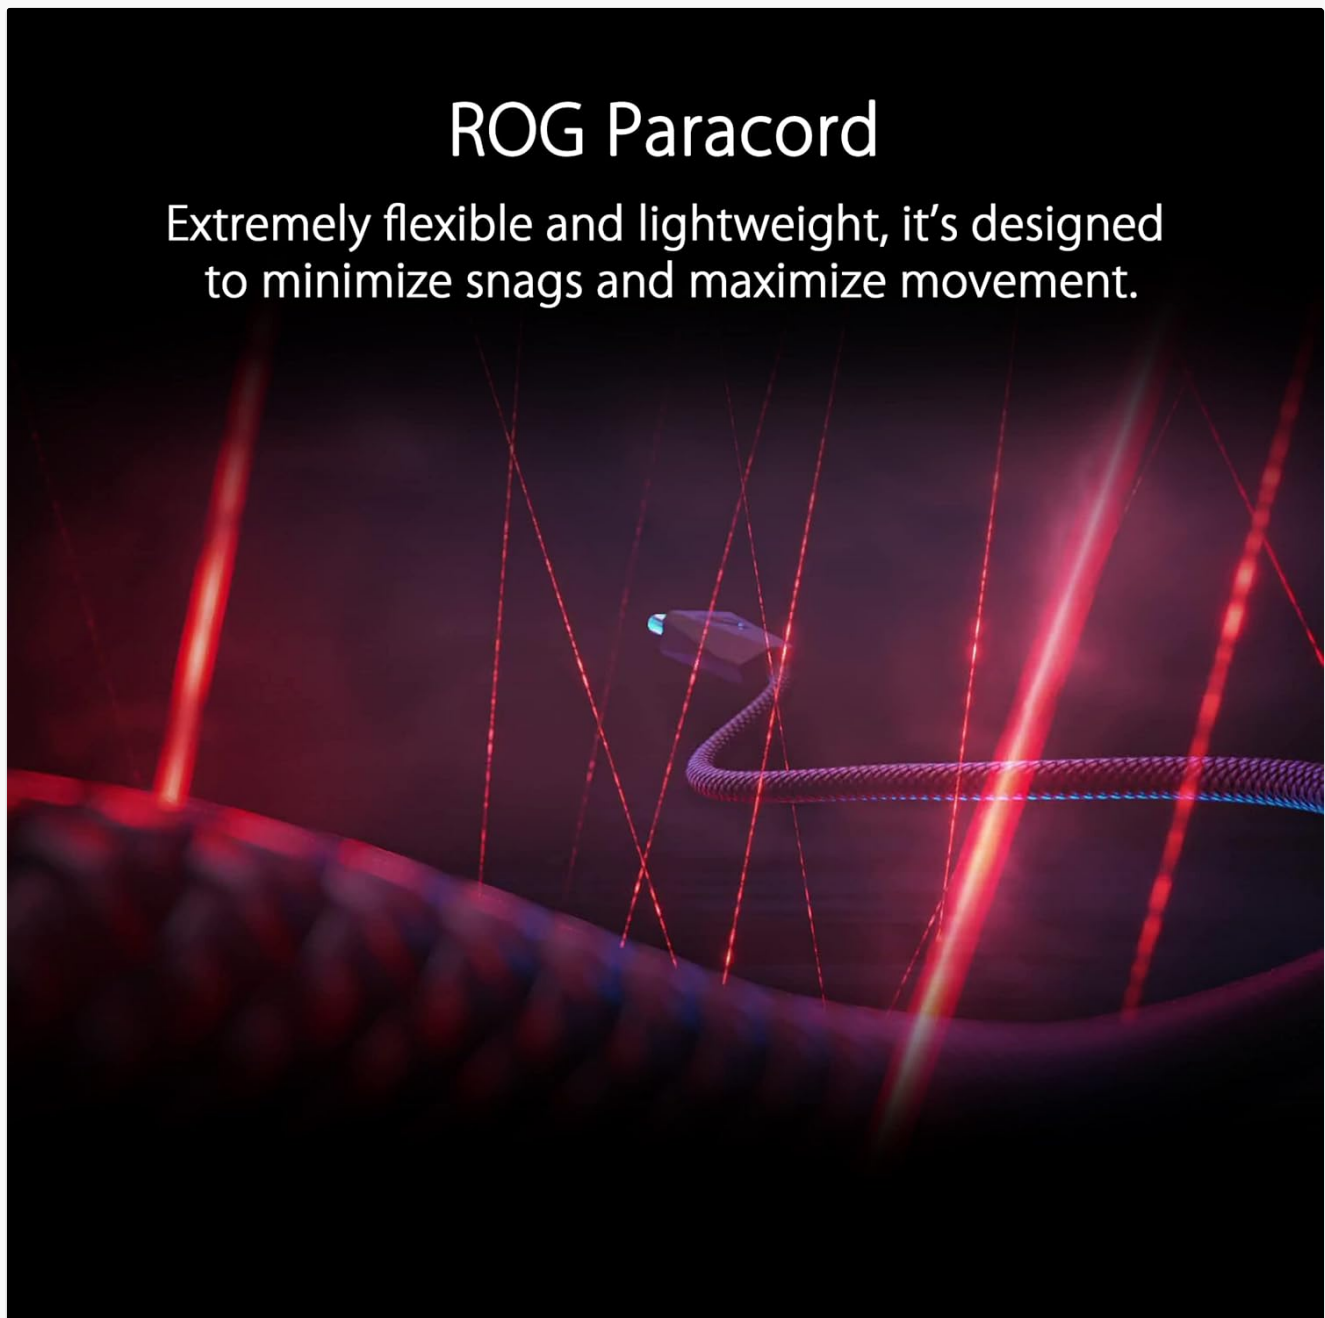


Figure 2: The ROG Paracord USB-C cable, designed for flexibility and minimal drag during wired use or charging.

SETUP

1. Charging the Mouse

Before initial use, it is recommended to fully charge the mouse. The ROG Spatha X offers two charging methods:

- **Magnetic Charging Stand:** Connect the USB-C cable to the charging stand and a USB port on your computer or a power adapter. Place the mouse onto the stand; it will magnetically align and begin charging.
- **Direct USB-C Connection:** Connect the USB-C cable directly from the mouse to a USB port on your computer. The mouse can be used in wired mode while charging.

A full charge provides up to 67 hours of wireless gameplay. A 15-minute charge can provide up to 12 hours of

wireless use.

Advanced Power Solution

Offers phenomenal battery life, giving you up to 67 hours of play time on a full charge.



Figure 3: The ASUS ROG Spatha X mouse positioned on its magnetic charging stand, illustrating the convenient charging method.

2. Connecting the Mouse

The ROG Spatha X supports dual-mode connectivity: 2.4 GHz wireless and wired USB-C.

Wireless Connection (2.4 GHz RF)

1. Locate the USB wireless receiver.
2. Plug the USB wireless receiver into an available USB port on your computer.
3. On the underside of the mouse, slide the power switch to the "Wireless" position.
4. The mouse should automatically connect to the receiver. The RGB lighting will indicate successful connection.

Wired Connection (USB-C)

1. Connect the USB-C end of the ROG Paracord cable to the mouse.
2. Connect the USB-A end of the cable to an available USB port on your computer.
3. On the underside of the mouse, slide the power switch to the "Wired" position.

4. The mouse will function immediately in wired mode and will also charge its internal battery.

3. Software Installation (Armoury Crate)

For full customization of DPI settings, button assignments, and RGB lighting, install the ASUS Armoury Crate software. This software can be downloaded from the official ASUS support website.

1. Visit the ASUS support website and search for "Armoury Crate".
2. Download and run the installer.
3. Follow the on-screen instructions to complete the installation.
4. Once installed, launch Armoury Crate to configure your ROG Spatha X mouse.

OPERATING INSTRUCTIONS

1. DPI Adjustment

The ROG Spatha X features a 19,000 DPI optical sensor. You can adjust the DPI (Dots Per Inch) sensitivity on-the-fly without software using the DPI cycle button located behind the scroll wheel. Pressing this button will cycle through pre-set DPI levels. These levels can be customized further using the Armoury Crate software.

Ultimate Accuracy

19,000 dpi
Resolution

400 IPS
Max Speed

50G
Acceleration



Figure 4: Visual representation of the mouse's high-performance specifications, including 19,000 DPI resolution, 400 IPS max speed, and 50G acceleration.

2. Programmable Buttons

The mouse features 12 programmable buttons, including the main left/right clicks, scroll wheel click, DPI button, and six side buttons. These buttons can be assigned various functions, macros, or shortcuts using the Armoury Crate software.

1. Launch Armoury Crate.
2. Navigate to the "Mouse" section and select your ROG Spatha X.
3. Go to the "Buttons" tab to view and customize button assignments.
4. Select a button and choose the desired function from the available options.
5. Save your changes.

Up to 12 Programmable Buttons

On ROG Spatha X put a myriad of commands in the palm of your hand, with six side buttons arranged to resemble the iconic ROG eye.



Figure 5: The left side of the ROG Spatha X, illustrating the arrangement of its six programmable side buttons, designed for intuitive control.

3. RGB Lighting (Aura Sync)

The ROG Spatha X features customizable Aura RGB lighting. You can personalize the lighting effects, colors, and synchronization with other Aura Sync compatible devices through the Armoury Crate software.

1. Launch Armoury Crate.
2. Navigate to the "Mouse" section and select your ROG Spatha X.
3. Go to the "Lighting" tab to configure RGB effects.
4. Choose from various effects, colors, and brightness levels.
5. Save your settings.

4. Battery Management

Monitor the battery level through the Armoury Crate software. When the battery is low, the mouse's indicator lights may change color or flash. Recharge the mouse using either the magnetic charging stand or a direct USB-C cable connection.

1. Cleaning

To maintain optimal performance, regularly clean your mouse:

- Disconnect the mouse from your computer.
- Use a soft, dry cloth to wipe the surface of the mouse.
- For stubborn dirt, slightly dampen the cloth with water or a mild cleaning solution (avoid harsh chemicals).
- Use a cotton swab or compressed air to clean around buttons and the scroll wheel.
- Ensure the optical sensor on the underside is free of dust and debris.

2. Switch Replacement (Push-Fit Switch Sockets)

The ROG Spatha X features exclusive push-fit switch sockets, allowing you to easily replace the main left and right click switches. This enables customization of click feel or replacement of worn-out switches.

Exclusive Push-Fit Switch Socket
Make it easy to drop in new switches
— so you can tailor operating force and feedback
to preference, or replace broken switches.



Figure 6: A close-up view of the exclusive push-fit switch socket, demonstrating the ease with which switches can be replaced.

Procedure:

- 1. Ensure the mouse is powered off and disconnected.
- 2. Carefully remove the screws located on the underside of the mouse (often hidden under rubber feet).
- 3. Gently lift the top cover of the mouse.
- 4. Using the included switch tweezers, carefully pull out the existing switch from its socket.
- 5. Align the pins of the new switch with the socket and gently push it in until it is securely seated.
- 6. Replace the top cover and secure it with the screws.



Figure 7: A detailed image of the ROG Micro Switch, highlighting its durable design with a 70-million-click lifespan and gold-plated electro-junction.

TROUBLESHOOTING

Problem	Possible Solution
---------	-------------------

Problem	Possible Solution
Mouse not responding (Wireless)	<ul style="list-style-type: none">• Ensure the mouse is charged.• Verify the power switch on the mouse is set to "Wireless".• Check if the USB wireless receiver is securely plugged into a working USB port.• Try plugging the receiver into a different USB port.• Re-pair the mouse with the receiver (refer to Armoury Crate for pairing instructions).
Mouse not responding (Wired)	<ul style="list-style-type: none">• Ensure the power switch on the mouse is set to "Wired".• Check if the USB-C cable is securely connected to both the mouse and the computer.• Try a different USB port on your computer.• Test with a different USB-C cable if available.
Inaccurate tracking or cursor lag	<ul style="list-style-type: none">• Clean the optical sensor on the underside of the mouse.• Ensure you are using the mouse on a suitable mouse pad or surface.• Check for interference if using wireless mode (e.g., other 2.4 GHz devices).• Adjust DPI settings in Armoury Crate or using the DPI button.
Buttons not working or responding	<ul style="list-style-type: none">• Check button assignments in Armoury Crate.• Ensure Armoury Crate software is up to date.• If a main click button is affected, consider replacing the switch using the push-fit sockets.
RGB lighting not working	<ul style="list-style-type: none">• Ensure Armoury Crate is installed and updated.• Check lighting settings within Armoury Crate.• Verify that Aura Sync is enabled if you are synchronizing with other devices.

SPECIFICATIONS

Feature	Detail
Connectivity	Wireless (2.4 GHz RF), Wired (USB-C)
Sensor	Optical
DPI Resolution	Up to 19,000 DPI
Max Speed	400 IPS
Max Acceleration	50G

Feature	Detail
Programmable Buttons	12
Switches	ROG Micro Switches (70-million-click lifespan), Push-fit Switch Sockets
Battery Life	Up to 67 hours (full charge), 12 hours (15-min charge)
Charging	Magnetic Charging Stand, USB-C
Lighting	Aura RGB
Cable	ROG Paracord USB-C to USB-A
Color	Black
Dimensions (Approx.)	Length: 137mm (5.39"), Width: 89mm (3.5"), Height: 45mm (1.77")



Figure 8: Diagram illustrating the approximate dimensions of the ASUS ROG Spatha X Wireless Gaming Mouse.

WARRANTY AND SUPPORT





ASUS products are manufactured to the highest quality standards. For detailed warranty information, please refer to the warranty card included in your product package or visit the official ASUS support website. If you encounter issues not covered in this manual, please contact ASUS customer support for assistance.

ASUS Support Website: www.asus.com/support/



© 2023 ASUS. All rights reserved. ASUS is a registered trademark of ASUSTeK Computer Inc.

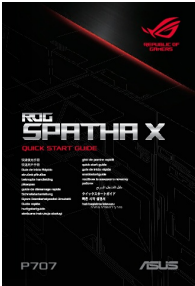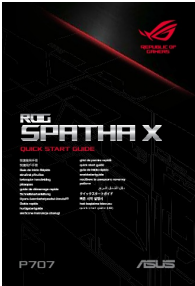
Related Documents - ROG Spatha X

	<p>ROG Spatha X Quick Start Guide - ASUS Gaming Mouse</p> <p>Get started with your ASUS ROG Spatha X gaming mouse (P707). This quick start guide provides essential setup, features, and connectivity information for optimal gaming performance.</p>
	<p>ASUS ROG Spatha X Gaming Mouse Quick Start Guide</p> <p>This guide provides essential information for setting up and using the ASUS ROG Spatha X gaming mouse, including package contents, device features, connection methods, specifications, and important notices.</p>
	<p>Asus ROG Harpe Ace Aim Lab Edition Gaming Mouse User Manual</p> <p>User manual for the Asus ROG Harpe Ace Aim Lab Edition gaming mouse, detailing its features, specifications, setup, usage, and safety information. Includes information on DPI settings, connectivity options, and warranty.</p>
	<p>Ръководство на потребителя за безжична геймърска мишка ASUS ROG Harpe II Ace</p> <p>Подробно ръководство за потребителя на безжичната геймърска мишка ASUS ROG Harpe II Ace. Включва спецификации, настройки, инструкции за безопасност, регулаторна информация и гаранционни условия.</p>



[ROG Keris Wireless Aimpoint Gaming Mouse Quick Start Guide](#)

Get started quickly with the ASUS ROG Keris Wireless Aimpoint gaming mouse. This guide covers wired, RF wireless, and Bluetooth connections, firmware updates via Armoury Crate, DPI customization, and battery status for optimal performance.



[ASUS ROG KERIS P509 Gaming Mouse Quick Start Guide](#)

This document provides quick start instructions for the ASUS ROG KERIS P509 gaming mouse, covering setup, customization with ROG Armoury Crate software, and technical specifications.