

## Spigen PA2001

# Spigen 3in1 10000mAh Wireless Charging Power Bank User Manual

Model: PA2001 | Brand: Spigen

## 1. INTRODUCTION

The Spigen 3in1 10000mAh Wireless Charging Power Bank is a versatile device designed to meet your charging needs on the go and at home. It functions as a wireless charger, a portable power bank, and a convenient mobile phone stand. With its 10000mAh capacity and fast charging capabilities via USB-A, USB-C, and wireless charging, it ensures your devices stay powered throughout the day.



Image: The Spigen 3in1 Power Bank with its charging dock and included USB-A to USB-C cable.

## 2. WHAT'S IN THE BOX

Upon unboxing your Spigen 3in1 Power Bank, please ensure all the following components are present:

- Wireless Powerbank
- Charging Dock
- TPU Deck
- USB-A to USB-C Cable (1m)

Note: A USB-Power Adapter is not included and must be purchased separately. For optimal performance, a 20W charger is recommended.



Image: All components included in the package: Wireless Power Bank, TPU Deck, Charging Dock, and USB-A to USB-C Cable.

### 3. SETUP AND INITIAL CHARGING

Before first use, it is recommended to fully charge your Spigen 3in1 Power Bank.

1. Connect the provided USB-A to USB-C cable to the charging dock.
2. Plug the USB-A end into a compatible USB power adapter (not included).
3. Place the Wireless Powerbank onto the charging dock. The LED indicators on the power bank will illuminate to show charging progress.
4. Allow the power bank to charge until all LED indicators are solid white, indicating a full charge.



※ USB-Power Adapter is not included

Image: The power bank placed on its charging dock, connected to a wall adapter for charging.

## 4. OPERATING INSTRUCTIONS

### 4.1. Wireless Charging

The Spigen 3in1 Power Bank supports wireless charging for compatible mobile devices. It can be used in both vertical and horizontal orientations when placed on the charging dock, or as a portable wireless charger.

- **Vertical Wireless Charging:** Place your wireless charging compatible phone vertically on the power bank while it is seated in the charging dock. Ensure the phone is centered for optimal charging.
- **Horizontal Wireless Charging:** Attach the included TPU Deck to the charging dock. Place your phone horizontally on the power bank, ensuring it is centered for optimal charging. This is ideal for media consumption.
- **Portable Wireless Charging:** Detach the power bank from the dock. Simply place your wireless charging compatible phone on the power bank's wireless charging surface. Press the power button on

the side of the power bank to initiate wireless charging.



Image: The 3-in-1 functionality of the power bank, showing it as a wireless charger, power bank, and mobile stand.

# Convenient Use at Any Position

※ Include Horizontal Deck



**Anti-Slip ring**  
Prevents the device  
from slipping

※ Anti-Slip Ring is NOT Magnetic

Image: Demonstrates convenient use in both vertical and horizontal positions with the included TPU deck.



## Informative & Soft LED Light

Dim LED lights ensure  
no interruption of sleep



\*White Light is for battery level

Image: Close-up of the anti-slip ring designed to prevent the device from slipping. Note: The anti-slip ring is not magnetic.

### 4.2. Wired Charging

The power bank features both USB-A (18W) and USB-C (20W) ports for fast wired charging. Wired charging is generally faster than wireless charging.

- Connect your device to the power bank using a compatible USB-A or USB-C cable.
- The power bank will automatically begin charging your device.

# Frequently Asked Questions

**Q. Is It Normal for Wireless Charger or Phone to become Hot while Wireless Charging?**

**A.** Wireless chargers get slightly hotter than cable chargers because they transfer electricity using magnetic induction, which is normal.

**Q. Wireless charging has turned on and off. Is it defective?**

**A.** If the device is not in the center position or heat increases, charging may be temporarily stopped to protect the device. Please note that this is a normal function to protect the device.

Image: The power bank being used for both wireless charging on the dock and wired charging while portable.

## 4.3. LED Indicators

The power bank is equipped with informative and soft LED lights to indicate battery level and charging status. White lights indicate the battery level.



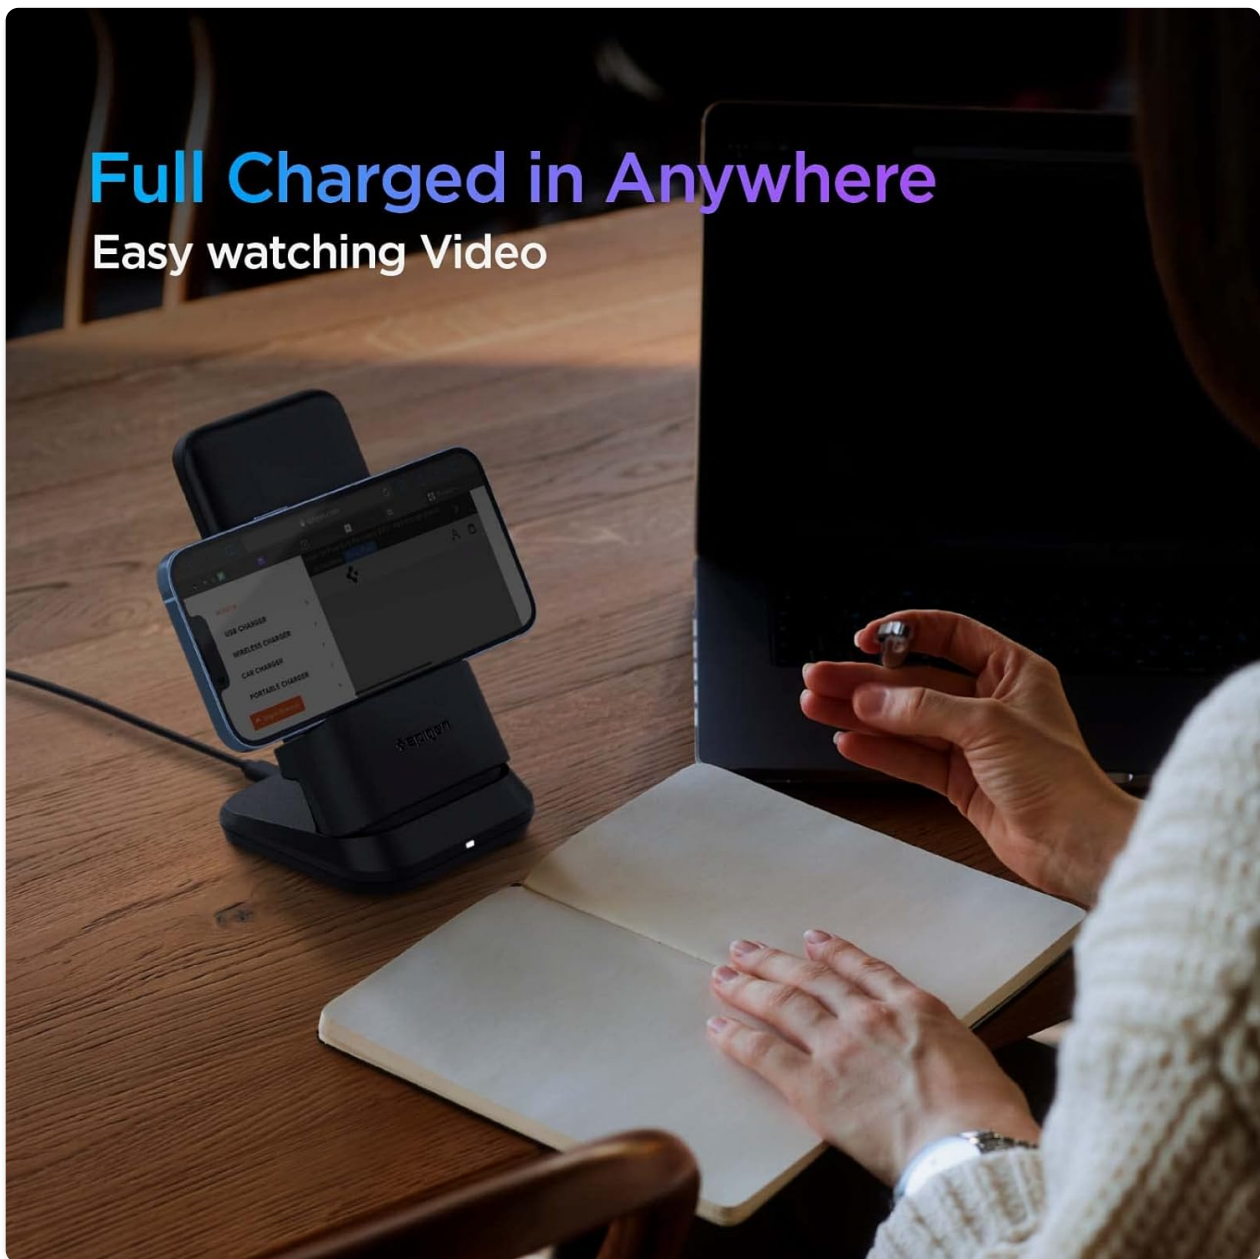


Image: Diagram showing the LED indicator patterns for battery levels (0-25%, 26-50%, 51-74%, 75-99%, 100%).

#### 4.4. Official Product Videos

Video: Spigen Wireless Power Bank 10000mAh. This video demonstrates the wireless charging capabilities and different orientations.

Video: Spigen 3in1 10000mAh Wireless Charging Power Bank with USB-A | USB-C 20W Fast Charging, Included. This video provides a comprehensive overview of the product's features and charging methods.

## 5. MAINTENANCE

To ensure the longevity and optimal performance of your Spigen 3in1 Power Bank, follow these maintenance guidelines:

- **Cleaning:** Use a soft, dry cloth to clean the surface of the power bank and charging dock. Avoid using harsh chemicals or abrasive materials.

- **Storage:** Store the device in a cool, dry place away from direct sunlight and extreme temperatures.
- **Battery Optimization:** If you experience any unusual behavior or wish to optimize the power bank's performance, you can reset it by pressing the power button for more than 10 seconds. This helps the power bank adapt to the mobile device.

## 6. TROUBLESHOOTING

Here are some common issues and their solutions:

**Q: Is it normal for the wireless charger or phone to become hot while wireless charging?**

A: Wireless chargers get slightly hotter than cable chargers because they transfer electricity using magnetic induction, which is normal. The power bank is designed to discharge at 65°C and restart at 45°C according to its Over Temperature Protection (OTP) function.

**Q: Wireless charging has turned on and off. Is it defective?**

A: If the device is not in the center position or if heat increases, charging may be temporarily stopped to protect the device. This is a normal function to protect the device and is not indicative of a defect.

**Q: My device is not charging or charging slowly.**

A: Ensure the power bank is sufficiently charged. For wireless charging, make sure your device is properly aligned on the charging surface. For wired charging, ensure the cable is securely connected to both the power bank and your device. Remember that wired charging is faster than wireless charging. Also, ensure your power adapter (not included) provides sufficient wattage (20W recommended).

A graphic with a dark blue background showing a close-up, slightly blurred view of a circuit board with various components and traces. The text "Beyond Expectation" is overlaid in a large, white, sans-serif font.

**Beyond Expectation**

Image: Common questions and answers regarding the power bank's operation and safety features.

# Completely passed Over Temperature Protection test.

※Discharge at 65°C, restart at 45°C



IntelligentSafety™



Airboost™



OverheatProtection™



PowerQuality  
Technology™



Image: Information on the power bank's safety features, including Intelligent Safety, Airboost, Overheat Protection, and Power Quality Technology.

## 7. SPECIFICATIONS

Feature	Detail
Model Number	PA2001
Battery Type	Lithium Polymer
Battery Capacity	10000 Milliamp Hours
Product Dimensions	15 x 9 x 9 cm
Item Weight	370 g

Input Voltage	12 Volts
Wireless Charging Output	Up to 15W (Fast wireless charge when used with only power bank or QC 3.0 adapter)
USB-C Output	20W Fast Charging
USB-A Output	18W Fast Charging
Special Features	LED Indicator Lights, Fast Charging, Wireless Charging
Compatible Devices	Universal for all devices under 6.9 inches, all mobile devices supporting Wireless Charging
Color	3IN1 - A to C cable (Black)

## 8. WARRANTY AND SUPPORT

Your Spigen 3in1 10000mAh Wireless Charging Power Bank comes with a standard brand warranty to ensure your peace of mind.

- **Warranty Period:** 12-Month Limited Warranty.
- **Manufacturer:** Spigen, Topband India Private Limited.
- **Packer:** Spigen India Private Limited.

For warranty claims, technical support, or any product-related inquiries, please refer to the contact information provided on the official Spigen India website or your purchase documentation.






Image: Highlights the 12-Month Limited Warranty and 'Made in India' certification.

© 2025 Spigen. All rights reserved.

Related Documents - PA2001

	<p><a href="#">Spigen ArcDock GaN 1204 4-Port USB Charging Station User Manual - PD2100</a></p> <p>User manual for the Spigen ArcDock GaN 1204 4-Port USB Charging Station (Model PD2100). Provides instructions, safety warnings, specifications, and regulatory compliance information for this 120W GaN charger.</p>
	<p><a href="#">Spigen ArcStation Pro GaN 1402 Wall Charger User Manual</a></p> <p>User manual for the Spigen ArcStation Pro GaN 1402 Wall Charger, providing instructions, safety guidelines, specifications, and warranty information for this 140W dual USB-C power adapter.</p>



	<p><a href="#">Spigen ArcStation Pro GaN 651 Wall Charger User Manual - Fast Charging Guide</a></p> <p>User manual for the Spigen ArcStation Pro GaN 651 Wall Charger. Learn how to use, safety guidelines, specifications, and warranty information for this 65W USB-C PD charger.</p>
	<p><a href="#">Spigen H3 Bluetooth Headset User Manual</a></p> <p>User manual for the Spigen H3 Bluetooth headset, detailing features, connectivity, and specifications. Includes instructions for pairing, multi-point connection, and factory reset.</p>
	<p><a href="#">Spigen ArcField Dual Wireless Charger PF2100 User Manual</a></p> <p>Official user manual for the Spigen ArcField Dual Wireless Charger PF2100, detailing setup, safety instructions, specifications, and warranty information.</p>

[illegible]

- Die meisten Tiere überwintern durch Aufspeicherung von Fett
- Die meisten Vögel überwintern durch Zugverhalten (Zugvögel) oder durch andere Strategien (z.B. Winterruhe, Verstecken, etc.)
- Die meisten Insekten überwintern durch Verstecken (z.B. in Blättern, unter Rinde, etc.)
- Die meisten Pflanzen überwintern durch Verstecken (z.B. in Blättern, unter Rinde, etc.)
- Die meisten Tiere überwintern durch Verstecken (z.B. in Blättern, unter Rinde, etc.)
- Die meisten Vögel überwintern durch Zugverhalten (Zugvögel) oder durch andere Strategien (z.B. Winterruhe, Verstecken, etc.)
- Die meisten Insekten überwintern durch Verstecken (z.B. in Blättern, unter Rinde, etc.)
- Die meisten Pflanzen überwintern durch Verstecken (z.B. in Blättern, unter Rinde, etc.)
- Die meisten Tiere überwintern durch Verstecken (z.B. in Blättern, unter Rinde, etc.)
- Die meisten Vögel überwintern durch Zugverhalten (Zugvögel) oder durch andere Strategien (z.B. Winterruhe, Verstecken, etc.)
- Die meisten Insekten überwintern durch Verstecken (z.B. in Blättern, unter Rinde, etc.)
- Die meisten Pflanzen überwintern durch Verstecken (z.B. in Blättern, unter Rinde, etc.)

[illegible]

### Attenzione

- 1) **Non** usare mai la lavatrice a vuoto.
- 2) **Non** lavare i tessuti in acqua fredda o troppo calda.
- 3) **Non** lavare i tessuti in acqua sporca o con molto sapone.
- 4) **Non** lavare i tessuti in acqua con molto sapone.
- 5) **Non** lavare i tessuti in acqua con molto sapone.
- 6) **Non** lavare i tessuti in acqua con molto sapone.
- 7) **Non** lavare i tessuti in acqua con molto sapone.
- 8) **Non** lavare i tessuti in acqua con molto sapone.
- 9) **Non** lavare i tessuti in acqua con molto sapone.
- 10) **Non** lavare i tessuti in acqua con molto sapone.

[illegible][illegible][illegible][illegible][illegible]

### Hinweise zur Bräut- und Verleugungsprüfung im 1. Abg. Scheinvernehmungs

Die folgenden Hinweise sind für die Teilnehmerinnen und Teilnehmer der Bräut- und Verleugungsprüfung im 1. Abg. Scheinvernehmungs zu beachten:

1. Die Teilnehmerinnen und Teilnehmer der Bräut- und Verleugungsprüfung im 1. Abg. Scheinvernehmungs sind verpflichtet, die folgenden Hinweise zu befolgen:
2. Die Teilnehmerinnen und Teilnehmer der Bräut- und Verleugungsprüfung im 1. Abg. Scheinvernehmungs sind verpflichtet, die folgenden Hinweise zu befolgen:
3. Die Teilnehmerinnen und Teilnehmer der Bräut- und Verleugungsprüfung im 1. Abg. Scheinvernehmungs sind verpflichtet, die folgenden Hinweise zu befolgen:
4. Die Teilnehmerinnen und Teilnehmer der Bräut- und Verleugungsprüfung im 1. Abg. Scheinvernehmungs sind verpflichtet, die folgenden Hinweise zu befolgen:
5. Die Teilnehmerinnen und Teilnehmer der Bräut- und Verleugungsprüfung im 1. Abg. Scheinvernehmungs sind verpflichtet, die folgenden Hinweise zu befolgen:
6. Die Teilnehmerinnen und Teilnehmer der Bräut- und Verleugungsprüfung im 1. Abg. Scheinvernehmungs sind verpflichtet, die folgenden Hinweise zu befolgen:
7. Die Teilnehmerinnen und Teilnehmer der Bräut- und Verleugungsprüfung im 1. Abg. Scheinvernehmungs sind verpflichtet, die folgenden Hinweise zu befolgen:
8. Die Teilnehmerinnen und Teilnehmer der Bräut- und Verleugungsprüfung im 1. Abg. Scheinvernehmungs sind verpflichtet, die folgenden Hinweise zu befolgen:
9. Die Teilnehmerinnen und Teilnehmer der Bräut- und Verleugungsprüfung im 1. Abg. Scheinvernehmungs sind verpflichtet, die folgenden Hinweise zu befolgen:
10. Die Teilnehmerinnen und Teilnehmer der Bräut- und Verleugungsprüfung im 1. Abg. Scheinvernehmungs sind verpflichtet, die folgenden Hinweise zu befolgen:

Die Teilnehmerinnen und Teilnehmer der Bräut- und Verleugungsprüfung im 1. Abg. Scheinvernehmungs sind verpflichtet, die folgenden Hinweise zu befolgen:

[illegible][illegible][illegible][illegible][illegible]

User manual and safety instructions for the Spigen ArcHybrid Mag Wireless Portable Charger PH2100, a 5000mAh magnetic charging power bank with fast wireless charging capabilities for iPhones.