

Speakman S-2251-PN

Speakman S-2251-PN Signature Icon Anystream Shower Head User Manual

Model: S-2251-PN | Brand: Speakman

PRODUCT OVERVIEW

Our signature silhouette, designed and engineered to deliver the greatest experience imaginable. The Speakman Icon S-2251 Multi-Function Shower Head is equipped with 8 patented plungers that transform water into 64 high pressure sprays. By simply rotating the Anystream handle in either direction, you can transition between Intense, Rain and Flood spray patterns. The Icon's modern, timeless frame is constructed entirely of remarkably durable solid brass.

- **TIMELESS SILHOUETTE:** Made of solid brass, this premium, high flow shower head has clean lines and a contemporary faucet design to enhance any modern bathroom's fixtures and accessories.
- **ANYSTREAM SYSTEM:** The adjustable shower head's patented Anystream 360° system effortlessly transitions through Intense, Rain and Flood settings, evenly distributing water.
- **HIGH PRESSURE:** Shower heads control the spread of water as it leaves the nozzle with patented plungers to intensify performance, making it an ideal low water pressure shower head.
- **SELF CLEAN:** The replacement showerhead features self-clean plungers which resist hard-water buildup and sediment keeping the shower head cleaner for a truly low maintenance shower fixture.



Figure 1: Speakman S-2251-PN Shower Head, Polished Nickel finish.

SETUP AND INSTALLATION

Installation of the Speakman S-2251-PN shower head is straightforward. Please follow these steps carefully:

1. **Preparation:** Ensure water supply to the shower is turned off. Gather necessary tools: thread seal tape (Teflon tape) and an adjustable wrench.
2. **Remove Old Shower Head:** Unscrew the existing shower head from the shower arm. Clean any old sealant or debris from the shower arm threads.
3. **Apply Thread Seal Tape:** Apply thread seal tape clockwise to the outlet side of the shower arm. This helps create a watertight seal and prevents leaks.
4. **Install New Shower Head:** Thread the Speakman S-2251-PN shower head onto the shower arm by turning it in a clockwise direction. Tighten with an adjustable wrench. Do not overtighten to avoid damaging connections or the shower head.
5. **Test for Leaks:** Turn on the water supply and check for any leaks. If leaks occur, tighten slightly or reapply thread seal tape.

Safety Tips: Cover your drain to prevent loss of parts during installation. Ensure all connections are tight to prevent leaks. This showerhead is designed for optimal operating range of 20-80 PSI.

FIND THE RIGHT SPEAKMAN SHOWERHEAD

Allowed flow rate by state:

California.....	1.5, 1.75 GPM
Colorado.....	1.5, 1.75, 2.0 GPM
Hawaii.....	1.5, 1.75 GPM
Maine.....	1.5, 1.75 GPM
Massachusetts.....	1.5, 1.75, 2.0 GPM
New Jersey.....	1.5, 1.75, 2.0 GPM
New York.....	1.5, 1.75, 2.0 GPM
Oregon.....	1.5, 1.75 GPM
Rhode Island.....	1.5, 1.75, 2.0 GPM
Vermont.....	1.5, 1.75, 2.0 GPM
Washington.....	1.5, 1.75 GPM
All other.....	1.5, 1.75, 2.0, 2.5 GPM

SPEAKMAN®

Figure 2: Detailed installation steps and tools required.

OPERATING INSTRUCTIONS

The Speakman S-2251-PN features the patented Anystream 360° technology, allowing you to easily adjust the spray pattern to your preference.

- **Adjusting Spray Pattern:** Locate the small lever on the side of the shower head. Rotate this lever to transition between the three distinct spray patterns: Intense, Rain, and Flood.
- **Intense Spray:** Provides a powerful, focused stream for deep rinsing and invigoration.
- **Rain Spray:** Offers a wide, gentle coverage, mimicking a natural rain shower.
- **Flood Spray:** Delivers a broad, drenching flow for maximum coverage.



Figure 3: Shower head in action, showing a powerful spray.

Your browser does not support the video tag.

Video 1: A 360-degree view of the Speakman S-2251-PN shower head, showcasing its design and features.

Your browser does not support the video tag.

Video 2: Demonstration of the Speakman Icon Anystream high-pressure adjustable shower head in use, showing various spray patterns and water flow.

MAINTENANCE

Proper maintenance will ensure the longevity and optimal performance of your Speakman shower head.

- **Periodic Cleaning:** Use a mild soap and warm water to clean the shower head. This helps maintain its appearance and prevents buildup.
- **Drying:** For best results, dry the shower head immediately after cleaning with a soft, clean cloth.
- **Avoid Harsh Cleaners:** Do not use harsh and/or abrasive cleaners on the shower head, as these can damage the finish.
- **Self-Clean Plungers:** The shower head features self-clean plungers designed to resist hard-water buildup and sediment. To clear any accumulated minerals, turn the handle to the FLOOD position to let the water drain out after every use.

- **Chrome Finish Care:** For chrome finished shower heads, a solution of one part vinegar to one part water can be used to remove hard water deposits. Soak the shower head in this solution for about 15 minutes, then rinse thoroughly. Dry immediately with a soft, clean cloth. **DO NOT USE** vinegar/water treatment on any finish other than Chrome.

TROUBLESHOOTING

If you experience issues with your Speakman shower head, consider the following common solutions:

- **Low Water Pressure:**
 - Check your home's main water pressure control valve. A slight adjustment can significantly impact shower pressure.
 - Ensure the shower head's internal components are free from mineral buildup. Refer to the "Self-Clean Plungers" and "Chrome Finish Care" sections under Maintenance.
 - Verify that the flow restrictor, if present, is not obstructed. Some users choose to remove the flow restrictor for increased water flow, but this may impact water consumption.
- **Leaking:**
 - Ensure the shower head is securely tightened to the shower arm.
 - Check the thread seal tape application. Reapply if necessary, ensuring it is wrapped clockwise and covers all threads.
- **Inconsistent Spray Patterns:**
 - Rotate the Anystream handle fully through all settings to dislodge any debris from the plungers.
 - Perform a thorough cleaning as described in the Maintenance section to remove any internal mineral deposits affecting spray consistency.

SPECIFICATIONS

Brand	Speakman
Model Number	S-2251-PN
Material	Brass
Finish Type	Polished Nickel
Product Dimensions	4.5"L x 4.5"W
Number of Settings	3 (Intense, Rain, Flood)
Number of Jets	8 (patented plungers)
Flow Rate	2.5 Gallons Per Minute (GPM)
Item Weight	1.25 pounds
Special Feature	Anystream technology, Self-cleaning plungers






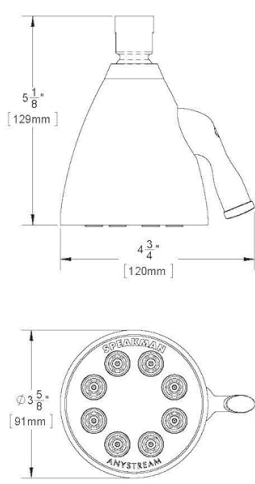
<p>INSTRUCTIONS FOR MODELS</p> <p>S-2251</p>  <p>NEED HELP?</p> <p>For additional assistance or service please contact</p> <p>SPEAKMAN® Company 400 Anchor Mill Road New Castle, DE 19720</p> <p>800-537-2107 customerservice@speakman.com www.speakman.com 92-S-2251-R6</p>	<p>TOOLS AND SUPPLIES</p> <p>Thread Seal Tape Adjustable Wrench</p>  <p>IMPORTANT</p> <p>Be sure to read instructions thoroughly before beginning installation. Do not overtighten any connections or damage may occur. This showerhead has an optimal operating range of 20-80 psi.</p> <p>SAFETY TIPS</p> <p>Cover your drain to prevent loss of parts.</p> <p>MAINTENANCE</p> <p>Periodic cleaning using a mild soap and warm water will help keep your Showerhead's appearance in its original condition.</p> <p>For best results, dry immediately with a soft, clean cloth. DO NOT USE harsh and/or abrasive cleaners.</p> <p>To help restore the finish, occasionally apply a non-abrasive wax to your showerhead body (follow manufacturer's instructions).</p> <p>On CHROME PLATED SHOWER HEADS, a two (2) part white vinegar, one (1) part water solution can be used to break down excessive mineral deposits on the nozzles. Let the showerhead soak in the solution for about 1/2 hour then rinse thoroughly. Brush off any remaining mineral deposits if necessary.</p> <p>DO NOT USE the vinegar/water treatment on any finish other than Chrome.</p> <p>To reduce mineral build-up, turn the handle to FLOOD position to let the water drain out after every use.</p> <p>WARRANTY</p> <p>Additional warranty information can be found at: www.speakman.com</p>	<p>1 Apply Teflon Tape to the outlet side of shower arm in a clockwise direction.</p>  <p>2 Thread Showerhead onto shower arm by turning it in a clockwise direction. Tighten with adjustable wrench. Turn water supply on and check for leaks.</p>  <p>3 Adjust spray pattern by rotating side handle to preferred Anystream® position.</p> 	<p>ROUGH IN DIMENSIONS</p>  <p>Specifications: Inlet: 1/2" NPT FEMALE</p>
--	---	--	---

Figure 4: Technical drawing with key dimensions of the shower head.

WARRANTY AND SUPPORT

Speakman products are known for their quality and durability. This product comes with a Lifetime Limited Warranty.

For additional assistance or service, please contact Speakman Company:

400 Anchor Mill Road
New Castle, DE 19720

Phone: 800-537-2107

Email: customerservice@speakman.com

Website: www.speakman.com

You can also find the official installation manual in PDF format [here](#).