

Grohe 20203000

GROHE Wall-Mounted Toilet Faucet 20203000 User Manual

Model: 20203000

1. INTRODUCTION

Thank you for choosing the GROHE Wall-Mounted Toilet Faucet, model 20203000. This manual provides essential information for the safe installation, proper operation, and effective maintenance of your new faucet. Please read these instructions carefully before installation and retain them for future reference.



Image 1.1: The GROHE Wall-Mounted Toilet Faucet 20203000, showcasing its chrome finish.

2. SAFETY INFORMATION

- Always turn off the main water supply before beginning any installation or maintenance work.
- Ensure all connections are secure to prevent leaks.
- If you are unsure about any part of the installation process, consult a qualified plumber.
- Do not use abrasive cleaners or solvents on the faucet's surface, as this may damage the finish.

3. PACKAGE CONTENTS

Verify that all components are present before starting the installation:

- GROHE 20203000 - Grifo Mural Universal, Cromo (Chrome), 1/2" (Wall-Mounted Universal Faucet, Chrome, 1/2")

4. SETUP AND INSTALLATION

The GROHE Toilet Faucet 20203000 is designed for wall mounting with a single hole installation. Follow these general steps for installation:

1. **Prepare the Installation Area:** Ensure the wall surface is clean, dry, and structurally sound. Turn off the main water supply.
2. **Mount the Faucet Body:** Secure the faucet body to the wall according to the technical specifications. Ensure proper alignment and a watertight seal.
3. **Connect Water Lines:** Connect the 1/2" water supply lines to the faucet. Use appropriate sealing materials (e.g., PTFE tape) to prevent leaks.
4. **Test for Leaks:** Slowly turn on the main water supply and check all connections for any signs of leakage. Tighten connections as necessary.
5. **Final Adjustments:** Ensure the faucet is firmly mounted and operates smoothly.

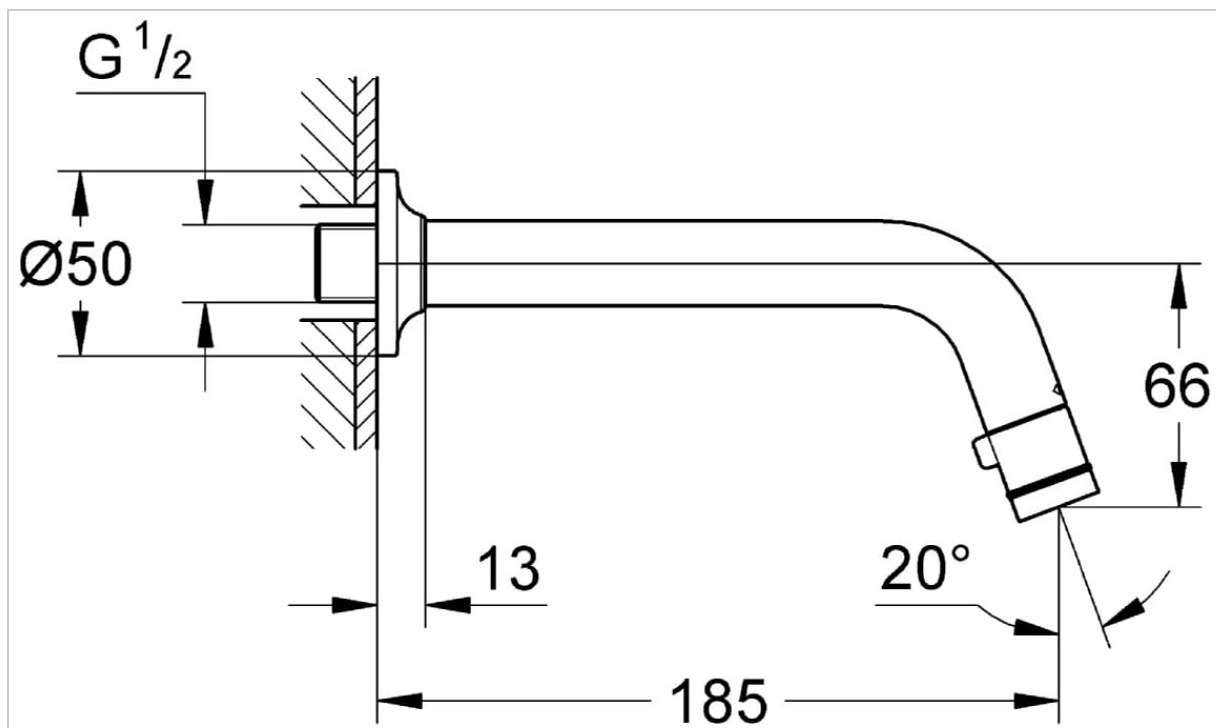


Image 4.1: Technical drawing illustrating the dimensions and wall mounting details of the GROHE 20203000 faucet. Key dimensions include a G 1/2 connection, a 50mm diameter, a 13mm wall clearance, a 185mm spout reach, and a 20-degree spout angle.

5. OPERATING INSTRUCTIONS

The GROHE Wall-Mounted Toilet Faucet 20203000 features a single lever handle for easy operation and precise control of water flow.

- **Water Flow Control:** The central lever handle controls the water flow. Move the handle to the desired position to start or stop the water.
- **Special Features:** This faucet includes a pneumatic trigger and an aerator with a start/stop function, enhancing water efficiency and user convenience.

6. MAINTENANCE

To ensure the longevity and pristine appearance of your GROHE faucet, follow these maintenance guidelines:

- **Cleaning:** The faucet features GROHE StarLight chrome finish, which is highly durable and scratch-resistant. Clean the surface regularly with a soft cloth and mild soap or a non-abrasive liquid cleaner specifically designed for chrome finishes.
- **Avoid Harsh Chemicals:** Do not use abrasive sponges, scouring agents, or cleaners containing alcohol, acids, or ammonia, as these can damage the finish.
- **Aerator Cleaning:** Periodically unscrew and clean the aerator to remove any mineral deposits that may affect water flow.

7. TROUBLESHOOTING

If you encounter issues with your faucet, refer to the following common troubleshooting steps:

- **Low Water Flow:** Check if the main water supply is fully open. Inspect the aerator for clogs and clean it if necessary.
- **Leaks:** Ensure all connections are tightly secured. If leaks persist, check the seals and O-rings for damage and replace if needed.
- **Stiff Handle:** If the handle is stiff or difficult to move, it may indicate mineral buildup. Consult a professional for servicing the internal cartridge.

8. SPECIFICATIONS

Brand	GROHE
Model Name	20203000
Mounting Type	Wall Mount, Single Hole
Finish Type	Chrome (GROHE StarLight)
Material	Ceramic (for valve), Stainless Steel (handle)
Color	Silver
Number of Handles	1
Special Features	Pneumatic Trigger, Aerator with Start/Stop Function
Maximum Flow Rate	6 Liters Per Minute
Spout Reach	185 Millimeters
Item Weight	1.19 Pounds
Recommended Use	Bathroom

9. WARRANTY

GROHE products are manufactured to the highest quality standards and are covered by a manufacturer's warranty. Please refer to the official GROHE website or your purchase documentation for specific warranty terms and conditions applicable to your region and product.

10. SUPPORT

For technical assistance, spare parts, or further information, please contact GROHE customer service. You can find contact details on the official GROHE website or through your local distributor.

Website: www.grohe.com

