



Manuals.plus /

- › YISHU /
- › YISHU 6 Ft Surge Protector Power Strip User Manual

## YISHU AHR-803

# YISHU 6 Ft Surge Protector Power Strip User Manual

Model: AHR-803 | Brand: YISHU

## INTRODUCTION

---

Thank you for choosing the YISHU 6 Ft Surge Protector Power Strip. This device is designed to provide convenient power distribution and surge protection for your electronic devices. Featuring 8 widely spaced AC outlets and 4 USB charging ports (3 USB-A, 1 USB-C), it allows you to power and charge multiple devices simultaneously. Its compact 3-side design, flat plug, and wall-mount capability offer versatile placement options for home, office, or dorm use. Please read this manual thoroughly before use to ensure safe and optimal performance.



Figure 1: YISHU 6 Ft Surge Protector Power Strip, showcasing its compact design and multiple outlets.

## IMPORTANT SAFETY INSTRUCTIONS

To reduce the risk of electric shock, fire, or injury, always follow basic safety precautions when using electrical appliances. Read all instructions before using this product.

- Do not use in humid environments, such as bathrooms or near sinks.
- Do not cover, disassemble, or modify the power strip. Unauthorized modifications can lead to electric shock or fire.
- Do not exceed the maximum power rating of 1250W. If the power rating of a single device is over 750W, it is recommended to plug it directly into a wall outlet rather than the power strip.
- Ensure the power strip is fully plugged into a grounded outlet.
- Keep children away from the power strip and connected devices.
- Do not use with extension cords that are not properly rated for the power strip.
- Unplug the power strip from the wall outlet when not in use or before cleaning.



Figure 2: Visual safety warnings against humid environments, disassembly, and overloading with high-wattage devices.

## PRODUCT OVERVIEW

---

The YISHU Surge Protector Power Strip is designed for maximum utility and safety. Key features include:

- **8 Widely Spaced AC Outlets:** Provides ample space for bulky power adapters without blocking adjacent outlets.
- **4 USB Charging Ports:** Includes 3 USB-A ports (5V/2.4A Max each) and 1 USB-C port (5V/3A Max), with a total output of 4.2A for all USB ports.
- **3-Side Design:** Optimizes space utilization, allowing plugs to extend from multiple directions.
- **6 Ft Extension Cord with Flat Plug:** The 45° flat plug design allows for easy installation in tight spaces, and the 6-foot cord offers flexible placement.
- **Multi-Safety Protection:** Features overload protection, short-circuit protection, over-current protection, over-voltage protection, and overheating protection. ETL certified.
- **600 Joules Surge Protection:** Protects connected devices from power surges and spikes.
- **Wall Mountable:** Two mounting holes on the back allow for secure installation on walls or under desks.

# 8 AC OUTLETS+3U1C



8 AC Outlets



3 USB Ports  
+USB C Port  
(Smart USB 4.2A total)



Fireproof shell



600J surge  
protection



Mounting Hole



ETL List

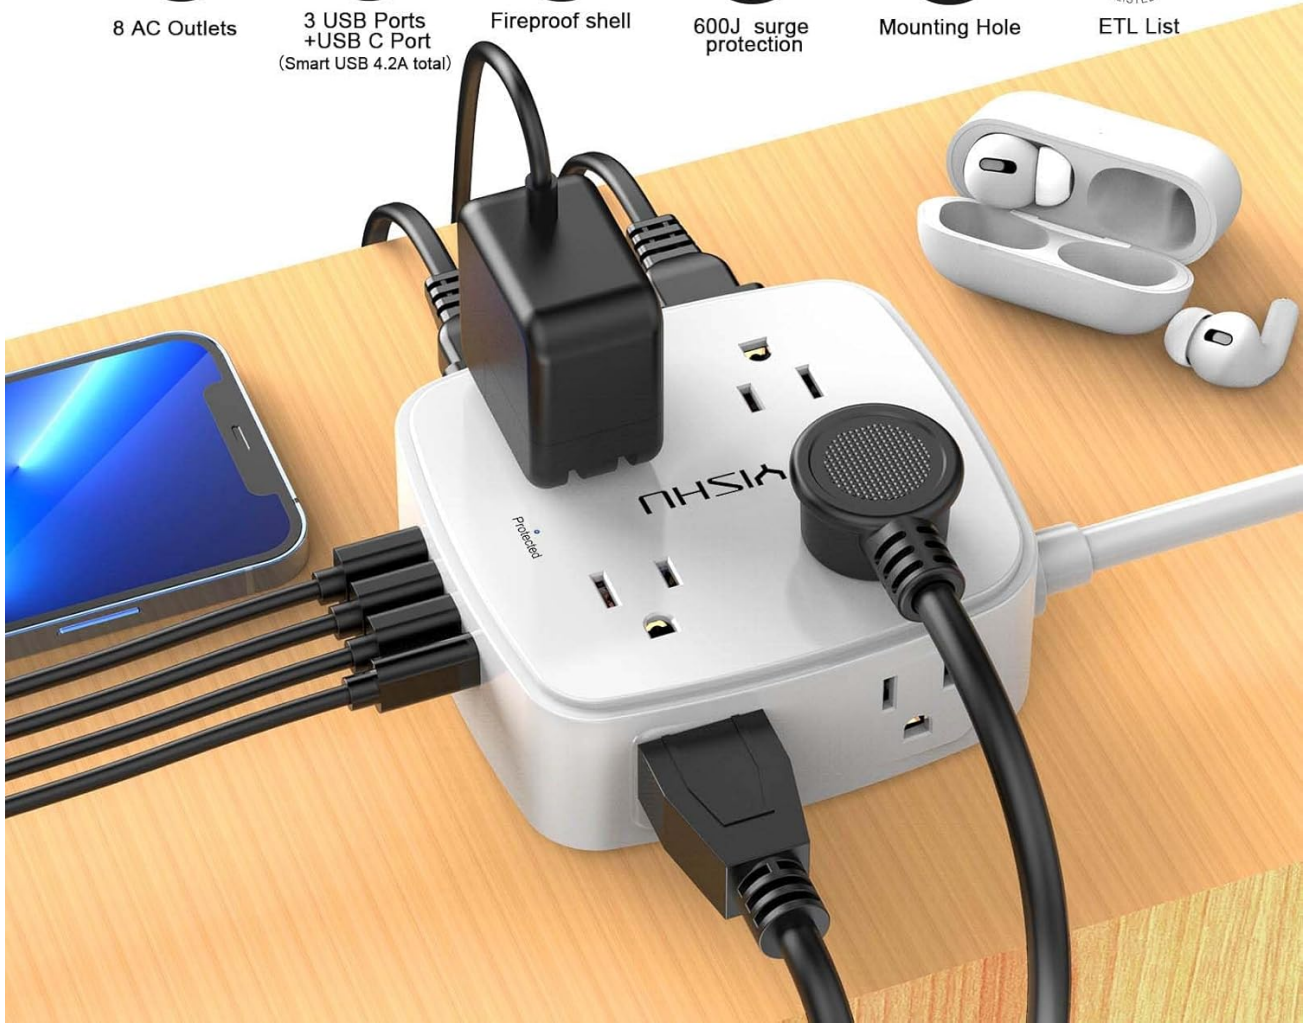


Figure 3: Overview of the 8 AC outlets and 4 USB ports (3 USB-A, 1 USB-C) for comprehensive device charging.

## 8 Widely Spaced Outlets

Widely spacing designed for big power adapter without blocking.



Figure 4: Detail showing the 1.78-inch wide spacing between AC outlets, accommodating larger power adapters.



Figure 5: Illustration of the USB-A and USB-C charging ports in use, compatible with various devices.

## SETUP

Setting up your YISHU Surge Protector is straightforward:

1. **Unpack:** Carefully remove the power strip from its packaging.
2. **Placement:** Choose a dry, indoor location away from heat sources and direct sunlight. The compact 3-side design is ideal for desks, nightstands, or behind furniture.
3. **Plug In:** Insert the flat plug of the power strip's 6-foot extension cord into a standard 3-prong grounded wall outlet. The flat plug allows for a low-profile connection, making it suitable for tight spaces.
4. **Wall Mounting (Optional):** For a more permanent setup, utilize the two mounting holes on the back of the power strip.
  - Measure the distance between the two keyhole slots on the back of the power strip.
  - Mark two corresponding spots on your desired mounting surface (wall or desk).
  - Install two screws (not included) into the marked spots, leaving a small portion of the screw head exposed.

- Align the keyhole slots on the back of the power strip with the screw heads and slide the power strip down to secure it.

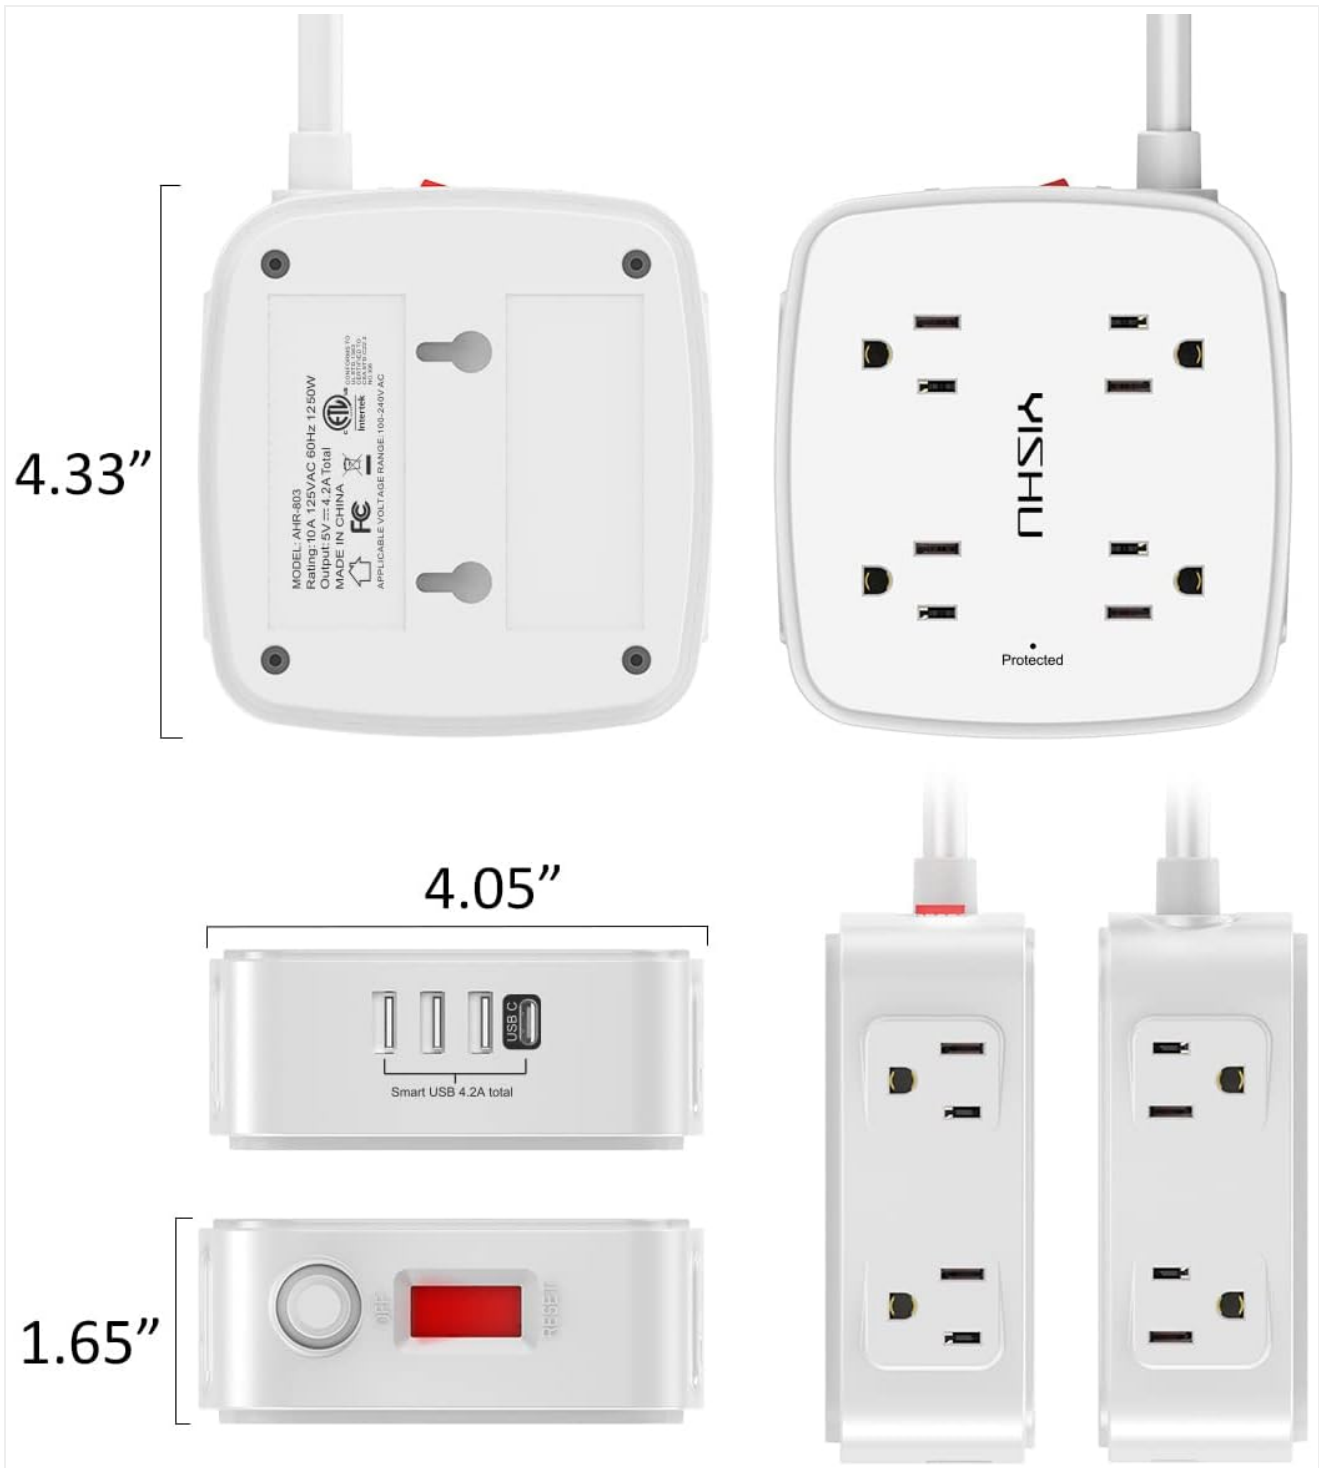


Figure 6: Product dimensions and location of wall mounting holes for secure installation.

## OPERATING INSTRUCTIONS

Using your YISHU Surge Protector is simple:

1. **Power On/Off:** Locate the red power switch on the side of the power strip. Press it to the "ON" position to supply power to the outlets and USB ports. Press it to the "OFF" position to cut power.
2. **Connect AC Devices:** Plug your electronic devices into any of the 8 widely spaced AC outlets. The wide spacing ensures that even large power adapters can be used simultaneously without obstruction.
3. **Charge USB Devices:** Connect your smartphones, tablets, smartwatches, or other USB-powered devices to the 3 USB-A ports or the 1 USB-C port. The smart USB technology automatically detects and delivers the

optimal charging current for your devices.

4. **Surge Protection Indicator:** A small blue LED light labeled "Protected" on the top surface of the power strip indicates that the surge protection function is active and your devices are protected. If this light is off, the surge protection may have been compromised, and the unit should be replaced.
5. **Overload Protection:** The power strip is equipped with an overload protection switch. In case of an overload (when connected devices draw too much power), the switch will automatically trip to protect your devices and the power strip. If this happens, unplug some devices, then press the red switch to reset it.



Figure 7: Close-up of the overload protection switch and the blue "Protected" indicator light.



Figure 8: Visual representation of the 600 Joules surge protection feature safeguarding connected electronics.

## MAINTENANCE

Proper maintenance ensures the longevity and safe operation of your power strip:

- **Cleaning:** Disconnect the power strip from the wall outlet before cleaning. Use a soft, dry cloth to wipe the exterior. Do not use liquid cleaners or aerosols.
- **Inspection:** Periodically inspect the power cord and the power strip for any signs of damage, such as frayed wires, cracks, or loose connections. If damage is found, discontinue use immediately and contact customer support.
- **Storage:** When not in use for extended periods, store the power strip in a cool, dry place away from direct sunlight and moisture.

## TROUBLESHOOTING

If you encounter issues with your YISHU Surge Protector, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
No power to outlets/USB ports.	Power switch is OFF, power strip is unplugged, or circuit breaker tripped.	Ensure power switch is ON. Check if the power strip is securely plugged into the wall outlet. Reset the overload protection switch if it has tripped. Check your home's circuit breaker.
USB ports not charging devices.	Device not compatible, faulty USB cable, or total USB current exceeded.	Try a different USB cable. Ensure your device is compatible with USB charging. Reduce the number of devices charging simultaneously if the total USB current (4.2A) is exceeded.
"Protected" indicator light is off.	Surge protection has been compromised due to a significant power surge.	The power strip may no longer provide surge protection. While the outlets may still function, it is recommended to replace the unit for continued surge protection.
Power strip feels hot.	Overload or poor ventilation.	Unplug some devices to reduce the load. Ensure the power strip is in a well-ventilated area and not covered. If overheating persists, discontinue use.

## SPECIFICATIONS

Feature	Detail
Model Number	AHR-803
Product Dimensions	4.33 x 4.05 x 0.04 inches
Item Weight	11.3 ounces
Total AC Outlets	8
USB Ports	3 USB-A, 1 USB-C
USB-A Output	5V/2.4A Max per port
USB-C Output	5V/3A Max
Total USB Output	4.2A
Voltage	125 Volts (Wide range voltage design: 100V to 240V circuit compatible)
Surge Protection	600 Joules minimum energy-absorbing capacity
Cord Length	6 Feet
Certifications	RoHS, FCC, ETL
Special Features	Mountable, On/Off Switch, Surge Protection, USB Slots, Flat Plug

## WARRANTY AND SUPPORT

YISHU is committed to providing quality products and excellent customer service.

- **Return Policy:** Enjoy a 30-day return period from the date of purchase.
- **Replacement Policy:** A 12-month replacement warranty is provided for product defects or malfunctions under normal use.
- **Customer Service:** For any questions, concerns, or support needs, please contact our friendly and reliable customer service team. We aim to respond within 24 hours.
- **Contact Information:** Please refer to the product packaging or the official YISHU website for the most current customer service contact details.