TOTO TS624E

TOTO Legato Wall Spout TS624E User Manual

Model: TS624E

Introduction

Thank you for choosing the TOTO Legato Wall Spout, model TS624E. This manual provides detailed instructions for the safe installation, operation, and maintenance of your new wall spout. Please read this manual thoroughly before beginning installation and retain it for future reference.

Package Contents

- Legato Wall Spout (TS624E)
- Mounting Hardware
- Installation Guide (this document)

Important Safety Information

Please observe the following safety precautions to prevent injury or property damage. Failure to follow these instructions may void the warranty.

- Always turn off the main water supply before beginning any installation or maintenance.
- Wear appropriate personal protective equipment, such as safety glasses, during installation.
- If you are unsure about any part of the installation process, consult a qualified professional plumber.
- Ensure all connections are secure and watertight to prevent leaks.
- Do not use harsh chemicals or abrasive cleaners on the spout's finish.

Setup and Installation

This section outlines the steps required to properly install your TOTO Legato Wall Spout. Ensure you have all necessary tools and materials before starting.

Tools Required

- Adjustable Wrench

- Pipe Thread Sealant Tape (Teflon Tape)
- Phillips Head Screwdriver
- Measuring Tape
- Level
- Drill (if new mounting holes are required)

Installation Steps

1. **Prepare the Wall:** Ensure the wall opening for the spout is clean and properly sized according to the rough-in specifications.
2. **Turn Off Water Supply:** Locate and turn off the main water supply to the installation area.
3. **Apply Sealant:** Apply pipe thread sealant tape to the threaded pipe extending from the wall.
4. **Attach Spout:** Carefully thread the wall spout onto the prepared pipe connection. Hand-tighten first, then use an adjustable wrench to secure it firmly. Do not overtighten.
5. **Align and Secure:** Ensure the spout is level and properly aligned. If applicable, use the provided mounting hardware to secure the spout to the wall, preventing rotation.
6. **Check for Leaks:** Slowly turn on the main water supply and inspect all connections for any signs of leakage. Tighten connections as necessary.
7. **Test Operation:** Once installed and checked for leaks, test the water flow from the spout.



Image 1: The TOTO Legato Wall Spout (TS624E) in Brushed Nickel finish, showcasing its sleek, rectangular design. This image illustrates the product as it appears when installed.

Operation

The TOTO Legato Wall Spout is designed for simple operation. Water flow is controlled by the associated faucet handle or valve (sold separately). Once the water supply is active and the valve is opened, water will flow from the spout. To stop the flow, close the valve.

Care and Maintenance

Proper care and maintenance will ensure the longevity and appearance of your TOTO Legato Wall Spout.

- **Cleaning:** Clean the spout regularly with a soft, damp cloth and mild soap. Rinse thoroughly with clean water and dry with a soft cloth to prevent water spots.
- **Avoid Harsh Cleaners:** Do not use abrasive cleaners, scouring pads, ammonia-based cleaners, or any products

containing bleach, acids, or alcohol, as these can damage the finish.

- **Prevent Mineral Buildup:** In areas with hard water, wipe the spout dry after each use to minimize mineral deposits.

Troubleshooting

This section addresses common issues you might encounter with your wall spout.

Problem	Possible Cause	Solution
Water leaks from spout connection.	Loose connection; insufficient thread sealant.	Turn off water supply, tighten connection, or reapply thread sealant tape.
Low water flow.	Partially closed water supply valve; debris in the line.	Ensure water supply valve is fully open. Consult a plumber if debris is suspected.
Spout is loose or rotates.	Mounting hardware not secured; spout not tightened sufficiently.	Tighten mounting screws or re-secure the spout connection to the wall.

Product Specifications

Detailed technical specifications for the TOTO Legato Wall Spout TS624E.

- **Model:** TS624E
- **Material:** Brass
- **Finish:** Brushed Nickel
- **Product Dimensions:** 8"L x 2.18"W (Spout body)
- **Spout Reach:** 10 Inches
- **Spout Height:** 2.75 Inches
- **Installation Method:** Single Hole, Wall Mount
- **Item Weight:** 0.01 Ounces
- **Country of Origin:** Japan

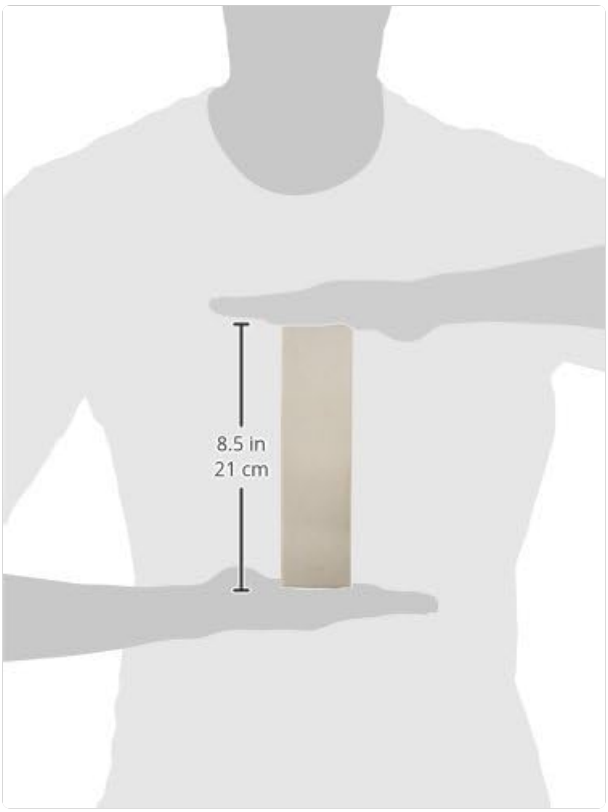


Image 2: A diagram illustrating the dimensions of a wall spout, showing a length of 8.5 inches (21 cm). This provides a visual reference for the product's size.

Warranty and Customer Support

TOTO products are manufactured to the highest quality standards and are backed by a limited warranty. For specific warranty details, please refer to the warranty card included with your purchase or visit the official TOTO website.
For technical assistance, replacement parts, or any other inquiries, please contact TOTO Customer Service:

- **Website:** www.totousa.com
- **Phone:** Refer to the TOTO website for regional contact numbers.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question