Manuals+

Q & A | Deep Search | Upload

manuals.plus /

- Casio /
- Casio Black Resin Watch Strap Instruction Manual for SGW-400H and SGW-300H Series

Casio CASIO_STRAP_10360816

Casio Black Resin Watch Strap Instruction Manual

For SGW-400H and SGW-300H Series Watches

1. Introduction

This document provides instructions for the installation, care, and maintenance of your genuine Casio Black Resin Watch Strap. This strap is designed as a direct replacement for specific Casio watch models, ensuring a secure and comfortable fit. It is crafted from high-quality resin material, known for its durability and flexibility.

2. COMPATIBILITY

This replacement watch strap is specifically designed for the following Casio watch models:

- SGW-400H-1BVH
- SGW-300H-1AVH

Please verify your watch's model number, typically found on the back casing, to ensure compatibility.

3. PACKAGE CONTENTS

The package includes:

• One (1) Casio Black Resin Watch Strap (two pieces)

Note: This product does not include spring bars (pins) or any other attachment hardware. You will need to reuse the existing spring bars from your original watch strap.

4. Installation Guide

Replacing your watch strap requires careful handling to avoid damage to your watch or the new strap. If you are unsure about any step, it is recommended to seek assistance from a professional watch technician.

4.1. Tools Required

· Spring bar tool (recommended) or a small, flat-head screwdriver

· Soft cloth or protective surface

4.2. Removing the Old Strap

- 1. Place your watch face down on a soft, clean cloth to prevent scratches.
- 2. Locate the spring bars that secure the strap to the watch lugs. These are small, spring-loaded pins.
- 3. Using a spring bar tool or a small screwdriver, gently compress one end of the spring bar and carefully pull the strap away from the watch lug.
- 4. Once one end is free, the spring bar can be removed. Repeat this process for the other side of the strap.
- 5. Keep the removed spring bars in a safe place, as they will be needed for the new strap.

4.3. Attaching the New Strap

The new strap consists of two pieces. Ensure you attach the longer piece (with more holes) to the 12 o'clock position and the shorter piece (with the buckle) to the 6 o'clock position.

- 1. Insert one end of a spring bar into one of the holes on the inside of a new strap piece.
- 2. Place the spring bar into one of the watch lugs, ensuring one end of the spring bar is seated in the lug hole.
- 3. Using the spring bar tool, compress the exposed end of the spring bar and guide it into the corresponding hole on the opposite side of the watch lug.
- 4. Gently tug on the strap to ensure both ends of the spring bar are securely seated in the lug holes. A slight click may be heard.
- 5. Repeat this process for the second piece of the strap.



Figure 1: The two pieces of the Casio Black Resin Watch Strap, ready for installation.



Figure 2: Detail of the strap ends, showing the design and where the spring bars are inserted.

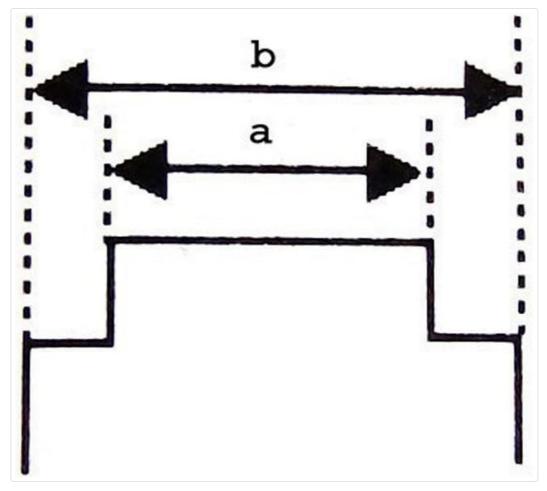


Figure 3: Diagram for measuring lug width (a) and overall strap width (b) for proper fitment.

5. USAGE AND ADJUSTMENT

Once installed, the strap can be adjusted to fit your wrist comfortably using the tang buckle. Insert the pin of the buckle into one of the strap holes that provides a snug yet comfortable fit. Ensure the strap is not too tight, which could restrict circulation, or too loose, which could cause the watch to move excessively.

6. MAINTENANCE AND CARE

To ensure the longevity and appearance of your Casio resin watch strap, follow these care guidelines:

- **Cleaning:** Wipe the strap regularly with a soft, damp cloth to remove dirt, sweat, and oils. For more thorough cleaning, use mild soap and water, then rinse thoroughly and air dry.
- Avoid Harsh Chemicals: Do not expose the strap to strong chemicals, solvents, or abrasive cleaners, as these can damage the resin material.
- **Storage:** Store your watch in a cool, dry place away from direct sunlight when not in use. Prolonged exposure to direct sunlight can cause the resin to degrade or discolor over time.
- Avoid Extreme Temperatures: While resin is durable, extreme hot or cold temperatures can affect its flexibility and lifespan.

7. TROUBLESHOOTING

7.1. Strap Does Not Fit

• Check Compatibility: Double-check your watch's model number against the compatible models

listed in Section 2.

- **Verify Spring Bars:** Ensure you are using the correct size and type of spring bars for your watch. The original spring bars are typically the best fit.
- **Proper Alignment:** Make sure the spring bar ends are correctly aligned with the lug holes before attempting to push them in.

7.2. Difficulty Installing Spring Bars

- **Use the Correct Tool:** A dedicated spring bar tool makes installation significantly easier and reduces the risk of scratching.
- **Apply Gentle Pressure:** Do not force the spring bar. If it's not going in smoothly, re-evaluate the alignment and ensure the spring bar is fully compressed.

8. SPECIFICATIONS



Figure 4: The watch strap measured for length.

Feature	Detail	
Product Model Number	CASIO_STRAP_10360816	
Material	Resin	
Color	Black	
Clasp Type	Tang Buckle	
Product Dimensions	7.68 x 1.97 x 0.59 inches	
Item Weight	0.35 ounces	

9. SUPPORT

For further assistance, questions regarding your Casio watch strap, or if you encounter issues not covered in this manual, please contact Casio customer support or visit the official Casio website for service

information.

© 2023 Casio. All rights reserved.

Related Documents - CASIO_STRAP_10360816

