

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

› [Bio Bidet](#) /

› [Bio Bidet BB1000 Warm Water Bidet Seat Instruction Manual \(Round Model\)](#)

Bio Bidet BB1000

Bio Bidet BB1000 Warm Water Bidet Seat Instruction Manual

Model: BB1000 (Round)

1. INTRODUCTION

This manual provides detailed instructions for the installation, operation, and maintenance of your Bio Bidet BB1000 Warm Water Bidet Seat. Please read this manual thoroughly before installation and use to ensure proper function and safety. The Bio Bidet BB1000 is designed to enhance your bathroom experience with features such as a heated seat, warm water wash, and warm air dryer.



Image 1.1: Top-down view of the Bio Bidet BB1000 bidet seat and its wireless remote control.

2. PRODUCT OVERVIEW AND FEATURES

The Bio Bidet BB1000 offers a range of features designed for comfort and hygiene:

- **Heated Seat:** Adjustable temperature settings for comfort.
- **Continuous Warm Water Wash:** Provides a consistent warm water stream.
- **Warm Air Dryer:** Reduces the need for toilet paper.
- **Wireless Remote Control:** Allows for personalized wash settings including water temperature, pressure, and nozzle position.
- **3-in-1 Nozzle System:** Features rear wash, front wash, and vortex wash options.
- **Slow Close Lid:** Prevents slamming and reduces wear.
- **Built-in Deodorizer:** Helps maintain a fresh bathroom environment.

- **Smart Seat Sensor:** Ensures the bidet functions only when occupied.
- **Energy Saving Mode:** Reduces electricity consumption.



Image 2.1: The BB1000 bidet seat installed on a toilet, illustrating key features like heated seat, heated water, and warm air dryer.



Image 2.2: Close-up view of the BB1000 bidet seat, pointing out features such as the slow-closing lid, deodorizer, and smart seat sensor.

3. SETUP AND INSTALLATION

Installation of the Bio Bidet BB1000 is designed for DIY setup and typically takes minutes. All necessary components are included. A standard 120-volt, 3-prong GFCI electrical outlet is required within reach of the bidet's power cord (approximately 3 feet from the right rear of the unit when facing the toilet). Ensure the outlet is not in an area prone to splashing.

Installation Steps:

1. **Turn off the water shut-off valve:** Locate the water supply valve for your toilet and turn it off to stop the water flow.
2. **Remove your existing toilet seat:** Unscrew and remove the bolts holding your current toilet seat in place.
3. **Install the catch plate and slide the bidet seat on:** Attach the provided catch plate to the toilet using the new bolts. Carefully slide the BB1000 bidet seat onto the catch plate until it clicks into place.
4. **Connect the toilet and bidet hoses:** Use the T-valve and bidet hose to connect the bidet to your toilet's water supply. Ensure all connections are secure but do not overtighten, especially the plastic

connections, to prevent damage.

5. **Plug the power cord into a GFCI outlet:** Once water connections are secure and checked for leaks, plug the bidet's power cord into a grounded GFCI electrical outlet.

Easy DIY Installation

Stress-free upgrade in minutes

Easy to follow video instructions

U.S.-based support ready for any questions



Image 3.1: A person performing the DIY installation of the bidet seat on a toilet.



Round Product Dimensions

Image 3.2: Detailed diagram illustrating the connection points for water supply and mounting hardware during installation.

Important Note: The bidet seat is designed for round toilets. Please verify your toilet's dimensions before installation. The power cord length is approximately 3 feet. An extension cord should not be used; ensure your GFCI outlet is appropriately located.

Warm Water

The water is pre-heated so you receive the perfect water temperature every time.



3-in-1 Nozzle

Rear Wash
Front Wash
Vortex Wash

Image 3.3: Visual guide for toilet seat sizing (round vs. elongated) and the requirement for an electrical outlet.

4. OPERATING INSTRUCTIONS

The Bio Bidet BB1000 is operated using the included wireless remote control. Ensure the remote has fresh AA batteries (included). The remote control panel should be mounted within approximately 20 inches of the bidet's left side for optimal signal reception.

Remote Control Functions:

Features

- Stops All Functions
- Adjustable Water Pressure
- Rear Wash
- Adjustable Nozzle Position
- Front Wash
- Pulsation
- Vortex Wash
- Nozzle Oscillation
- Warm Air Dryer
- Energy Saving Mode
- Adjustable Water Temp.
- Adjustable Seat Temp.

*Remote Wall Mount Included



Image 4.1: The wireless remote control for the BB1000, detailing buttons for various functions.

- **STOP:** Halts all active functions.
- **REAR:** Initiates the rear wash cycle.
- **FRONT:** Initiates the feminine wash cycle.
- **VORTEX:** Activates the high-pressure vortex wash.
- **DRY:** Starts the warm air drying cycle.
- **WATER TEMP (+/-):** Adjusts the water temperature.
- **WATER PRESSURE (+/-):** Adjusts the water spray intensity.
- **NOZZLE POSITION (Up/Down arrows):** Adjusts the nozzle's position.
- **SEAT TEMP (+/-):** Adjusts the heated seat temperature (Low, Medium, High).
- **PULSE:** Provides a pulsating water stream.
- **MOVE:** Activates nozzle oscillation for a wider cleaning area.
- **ECO:** Engages the energy-saving mode.



Image 4.2: Visual representation of the adjustable heated seat and the warm air dryer feature.



Image 4.3: Illustration of the warm water delivery system and the multi-function 3-in-1 nozzle.

5. MAINTENANCE

Regular cleaning and maintenance will ensure the longevity and optimal performance of your Bio Bidet BB1000.

Cleaning Instructions:

- **Exterior Cleaning:** Wipe the exterior surfaces of the bidet seat with a soft, damp cloth. For stubborn stains, use a mild, non-abrasive cleaner.
- **Nozzle Cleaning:** The 3-in-1 nozzle is self-cleaning. However, if manual cleaning is required, gently pull out the nozzle and wipe it with a soft cloth or brush. Do not use harsh chemicals.
- **Avoid Harsh Chemicals:** Do not use strong chemical cleaners, abrasive pads, or solvents (e.g., Lysol, Clorox type spray bathroom cleaners) on any part of the bidet seat, as these can damage the plastic and finish. Always wipe surfaces dry after cleaning.
- **Filter Maintenance:** Periodically check the water inlet filter for any debris and clean if necessary to maintain optimal water flow.

Removing the Bidet Seat for Servicing:

To remove the BB1000 for thorough cleaning or servicing, locate the tab on the right side bottom of the unit. Push this tab in and slide the bidet seat forward off the attachment point on the toilet.

6. TROUBLESHOOTING

If you encounter issues with your Bio Bidet BB1000, refer to the following common troubleshooting tips:

- **No Power:**
 - Ensure the power cord is securely plugged into a functional GFCI outlet.
 - Check your home's circuit breaker if the outlet is not receiving power.
- **No Water Spray or Weak Spray:**
 - Verify that the toilet's water shut-off valve is fully open.
 - Check for kinks in the water supply hose.
 - Inspect the water inlet filter for clogs and clean if necessary.
 - Ensure the seat sensor is engaged (you must be seated for functions to activate).
- **Remote Control Not Responding:**
 - Replace the AA batteries in the remote control.
 - Ensure the remote is within close proximity (approx. 20 inches) to the bidet's left side for optimal signal.
- **Water Leaks:**
 - Check all water connections for tightness. Do not overtighten plastic fittings.
 - Ensure rubber washers are properly seated in all connections.
- **Heated Seat Not Working:**
 - Confirm the heated seat function is enabled and set to a desired temperature via the remote control.
 - Ensure the seat sensor is engaged.

If issues persist after troubleshooting, please contact Bio Bidet customer support.



7. SPECIFICATIONS

Feature	Specification
Brand	Bio Bidet
Model Number	BB1000
Shape	Round
Color	White
Material	Plastic
Product Dimensions	19.4"L x 17.9"W
Item Weight	15 Pounds

Feature	Specification
Voltage	120 Volts
Wattage	660 watts
Amperage Capacity	5 Amps
Temperature Range (Water)	75-104 Degrees Fahrenheit
Water Consumption	0.32 Gallons per Minute
Batteries (Remote)	2 AA batteries (included)
UPC	088595200609

Installation Guide

1. Turn off the water shut-off valve.
2. Remove your existing toilet seat.
3. Install the catch plate and slide the bidet seat on.
4. Connect the toilet and bidet hoses.
5. Plug the power cord into a GFCI outlet.

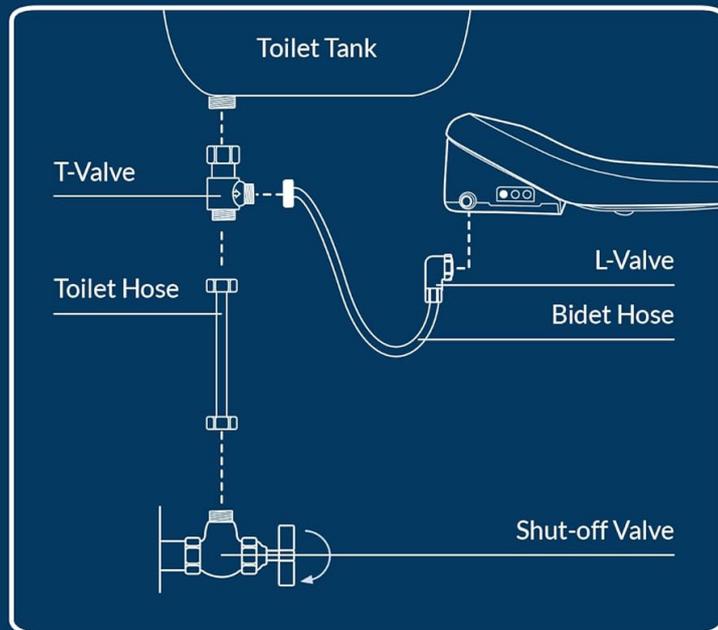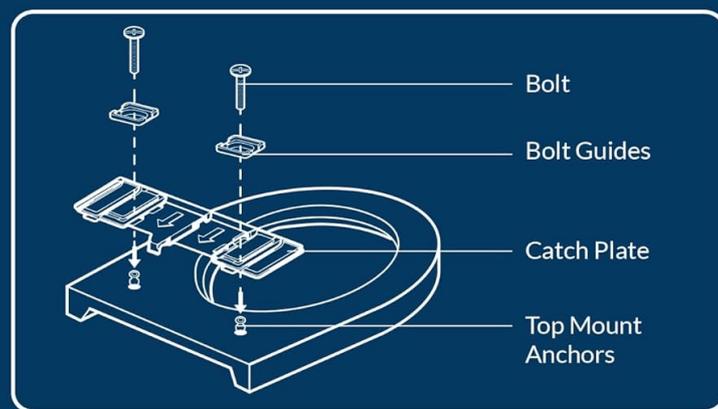

U.S.-based Support Team
available for any questions

Image 7.1: Dimensional drawing of the BB1000 Round bidet seat, showing length, width, and height.

8. WARRANTY AND SUPPORT

Warranty Information:

The Bio Bidet BB1000 is covered by a manufacturer's limited warranty for 3 years. This warranty applies to purchases made by customers in the US and Canada. Please retain your proof of purchase for warranty claims.

Customer Support:

For any questions, installation assistance, or troubleshooting not covered in this manual, please contact Bio Bidet's U.S.-based customer support. Refer to the product packaging or the official Bio Bidet website for current contact information.