

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [Oraimo](#) /

› [Oraimo 30000mAh Li-Polymer Power Bank \(Model OPB-P300Q\) User Manual](#)

Oraimo OPB-P300Q

Oraimo 30000mAh Li-Polymer Power Bank (Model OPB-P300Q) User Manual

Model: OPB-P300Q

1. INTRODUCTION

Thank you for choosing the Oraimo 30000mAh Li-Polymer Power Bank, Model OPB-P300Q. This device is designed to provide reliable and fast charging for your electronic devices on the go. Please read this manual carefully to ensure proper use and maintenance of your power bank.

Package Contents:

- 1x Oraimo 30000mAh 15W Fast Charging Power Bank
- 1x Type-C Cable
- 1x User Manual

2. PRODUCT OVERVIEW

The Oraimo OPB-P300Q Power Bank features a high-capacity battery, multiple charging ports, and an integrated LED torch for convenience. Its robust design ensures multi-layer protection for safe operation.

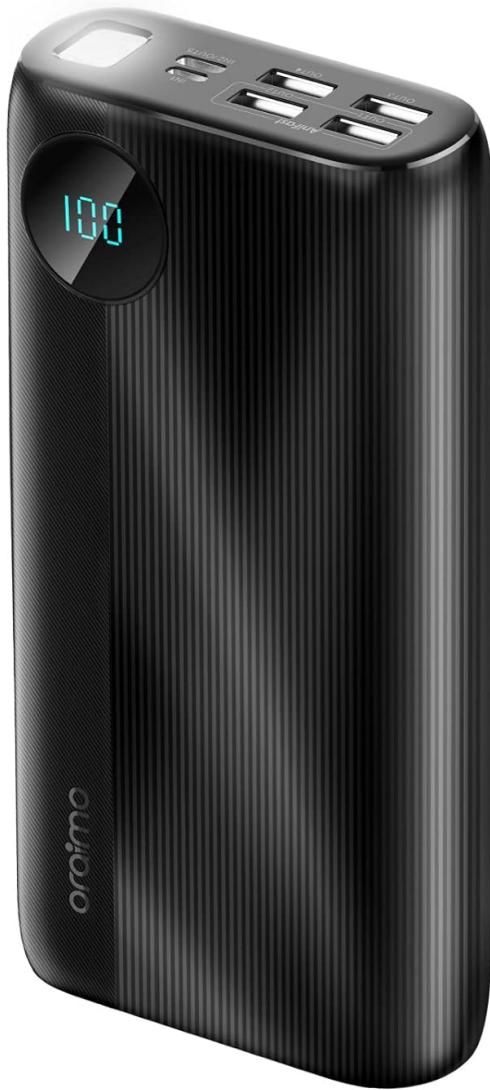


Figure 2.1: Front view of the Oraimo 30000mAh Power Bank, showcasing the LED digital display and textured surface.

Key Features:

- **30000mAh High Capacity:** Provides extended power for multiple device charges.
- **15W Two-Way Fast Charging:** Supports fast charging for both input and output via Type-C.
- **5 Output Ports:** Includes 1 Type-C port and 4 USB-A ports for simultaneous charging of up to five devices.
- **LED Digital Display:** Shows the remaining battery percentage.
- **Integrated LED Torch & SOS Alarm:** Provides illumination and an emergency signal function.
- **AniFast™ Technology:** Intelligently identifies fast-charging protocols for optimal charging speed.
- **Low-Current Device Protection:** Automatically adjusts charging for small devices like earphones and smartwatches.

Widely Compatible

Smart and Powerful

Equipped with oraimo's exclusive chip, AniFast™ power bank can intelligently identify the fast-charging protocol of your device to deliver the speediest possible charge.



Compatible Models

iOS: iPhone 13/13 Pro /13 Pro Max; SE2; iPad Pro 11/mini5; AirPods, etc.
Android: Samsung Galaxy S22+/S22/Note 9/A9s/S9; TECNO; Infinix, etc.
Others: TWS; Bluetooth speaker, etc.



*Doesn't support fast charging protocols such as Qualcomm and PD. oraimo Lab test result.

Figure 2.2: Top view of the power bank showing all input/output ports and the LED torch. AniFast Technology ensures smart and powerful charging.

3. SETUP

Initial Charging:

1. Upon first use, it is recommended to fully charge your Oraimo power bank.
2. Connect the provided Type-C cable to the Type-C input port (IN2/OUT5) on the power bank.
3. Connect the other end of the cable to a compatible 15W (or higher) USB wall adapter (not included).
4. The LED digital display will show the charging progress. The power bank is fully charged when the display shows "100".

You can also use the Micro-USB input port (IN1) for recharging, but the Type-C port supports faster input.

4. OPERATING INSTRUCTIONS

Charging Your Devices:

1. Connect your device's charging cable to one of the power bank's output ports (OUT1, OUT2, OUT3, OUT4, or Type-C OUT5).
2. Connect the other end of the cable to your device.
3. The power bank will automatically begin charging your device. The LED display will show the remaining battery percentage.
4. To charge low-current devices (e.g., wireless earphones, smartwatches), the power bank will automatically switch to a low-current charging mode to prevent damage.



Figure 4.1: The power bank simultaneously charging a smartwatch, earbuds, and a tablet, demonstrating its multi-device charging capability.

Two Way Fast-charging

Charge and Recharge in One Cable

Recharging your power bank with Micro-USB and USB-C ports. What's more, you can also use USB-C to lightning or USB-C to USB-C cables to charge your iOS devices.



*Cable is not included in the product.

Figure 4.2: Illustration of the power bank's two-way fast charging feature, capable of both charging devices and being recharged at 15W.

Using the LED Torch and SOS Alarm:

The power bank is equipped with an LED torch and an SOS lighting alarm for emergencies.

- **To turn on/off the torch:** Double-press the power button.
- **To activate SOS lighting:** While the torch is on, double-press the power button again. The light will flash in an SOS pattern.
- **To turn off SOS lighting:** Double-press the power button.

LED Torch and SOS Alarm

Not Afraid of Darkness Anymore

Equipped with durable LED torch and SOS alarm, helping you deal with all unexpected emergencies.



Figure 4.3: The power bank's LED torch in operation, with visual instructions for switching it on/off and activating the SOS alarm.

5. MAINTENANCE

- Keep the power bank away from water, moisture, and extreme temperatures.
- Avoid dropping or subjecting the power bank to strong impacts.
- Clean the surface with a soft, dry cloth. Do not use harsh chemicals or abrasive materials.
- Store the power bank in a cool, dry place when not in use. For long-term storage, ensure it is charged to approximately 50-75% capacity.
- Do not attempt to disassemble, repair, or modify the power bank yourself. This will void the warranty and may cause safety hazards.

6. TROUBLESHOOTING

Problem	Possible Cause	Solution
---------	----------------	----------

Problem	Possible Cause	Solution
Power bank not charging devices.	<ul style="list-style-type: none"> Power bank battery is depleted. Loose cable connection. Incompatible charging cable or device. 	<ul style="list-style-type: none"> Recharge the power bank fully. Ensure cables are securely connected. Try a different cable or device to isolate the issue.
Power bank not recharging.	<ul style="list-style-type: none"> Charging adapter is not working or insufficient power. Charging cable is faulty. Input port is damaged. 	<ul style="list-style-type: none"> Use a 15W or higher power adapter. Try a different charging cable. Ensure the input port is clean and undamaged.
Slow charging speed.	<ul style="list-style-type: none"> Using a non-fast charging cable or adapter. Device does not support fast charging. Multiple devices charging simultaneously. 	<ul style="list-style-type: none"> Ensure both cable and adapter support 15W fast charging. Check your device's charging specifications. Charging fewer devices may increase speed for individual devices.
LED torch not working.	<ul style="list-style-type: none"> Incorrect operation. Power bank battery is too low. 	<ul style="list-style-type: none"> Double-press the power button to activate. Recharge the power bank.

7. SPECIFICATIONS

Feature	Detail
Model Number	OPB-P300Q
Battery Type	Li-Polymer
Battery Capacity	30000mAh
Micro-USB Input (IN1)	5V/2A
Type-C Input/Output (IN2/OUT5)	5V/3A (Max 15W)
USB-A Outputs (OUT1, OUT2, OUT3, OUT4)	5V/3A (Max 15W per port, Total Max 15W)
Total Output	5V/3A (Max 15W)
Special Features	15W Two-way Fast-charging, LED Digital Display, SOS Lighting Alarm, Low-current Device Protection
Dimensions	20 x 12 x 4 cm
Weight	200 g
Color	Black

8. SAFETY INFORMATION

- Do not expose the power bank to fire or extreme heat.
- Do not use the power bank in environments with high humidity or near water.
- Keep out of reach of children.
- Do not short-circuit the power bank.
- If the power bank swells, leaks, or emits an unusual odor, discontinue use immediately and contact customer support.
- Dispose of the power bank according to local regulations for electronic waste.

9. WARRANTY AND SUPPORT


Your Oraimo 30000mAh Li-Polymer Power Bank is covered by a **1-Year Warranty** from the date of purchase. This warranty covers manufacturing defects and workmanship under normal use. The warranty does not cover damage caused by misuse, accidents, unauthorized modifications, or natural disasters.

For warranty claims, technical support, or any inquiries, please contact Oraimo customer service through their official channels or visit the [Oraimo Store on Amazon](#).

© 2024 Oraimo. All rights reserved.


Related Documents - OPB-P300Q

	<p>oraimo Watch 3 Lite OSW-800N: User Manual, Setup Guide, and Specifications</p> <p>Get detailed instructions for your oraimo Watch 3 Lite (OSW-800N). This guide covers setup, pairing, features, troubleshooting, product specifications, and warranty information.</p>
	

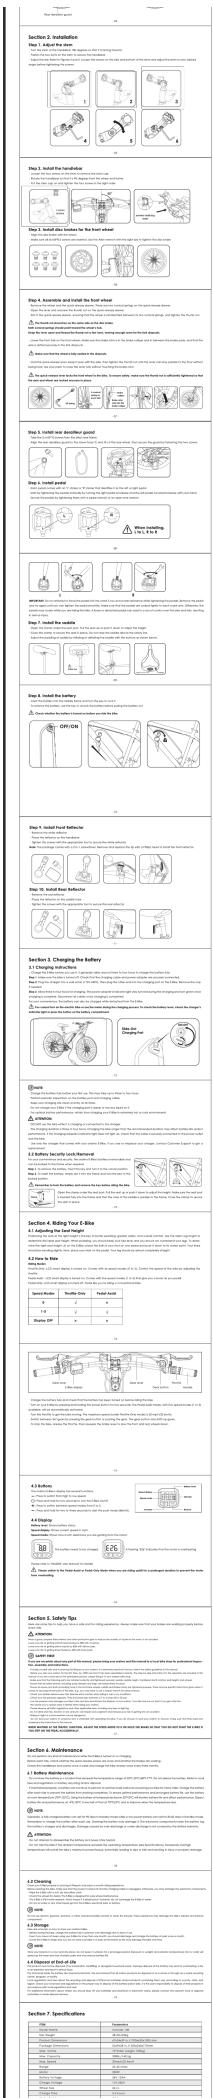

Oraimo Electric Bike for Adults User Manual - Flat Iron Bike

Comprehensive user manual for the Oraimo Electric Bike for Adults, featuring a 350W BAFANG motor, 4A 3H fast charge, UL certified battery, 26" mountain ebike design with Shimano 21-speed gears, and an air saddle. Includes specifications, operation, safety, and maintenance guidelines.

 <p>One-Year Limited Hardware Warranty</p> <p>Keep Exploring</p> <p>View Details</p>	
	<p>Oraimo OHM-H01 Ultrasonic Warm & Cool Mist Humidifier User Manual</p> <p>Comprehensive user manual for the Oraimo OHM-H01 Ultrasonic Warm & Cool Mist Humidifier, covering safety instructions, product overview, control functions, troubleshooting, and warranty information.</p>
	<p>Oraimo FreePods 3C True Wireless Earbuds User Manual and Guide</p> <p>Comprehensive guide for Oraimo FreePods 3C true wireless earbuds, covering setup, usage, controls, troubleshooting, warranty, and safety information.</p>
	<p>Oraimo OSW-803N Smartwatch User Manual and Specifications</p> <p>Comprehensive user guide for the Oraimo OSW-803N smartwatch, detailing setup, features, app integration, troubleshooting, technical specifications, and warranty information.</p>
	<p>Oraimo OBS-75D Portable Wireless Speaker: User Manual, Specifications, and Warranty</p> <p>Comprehensive user guide for the Oraimo OBS-75D portable wireless speaker, covering setup instructions, product specifications, control functions, troubleshooting tips, and warranty information.</p>

Documents - Oraimo – OPB-P300Q

[pdf]

Libro3 Stock Cyber Oraimo CCSS ORAIMO v 1664762274 cdn shopify s files 1 0589 8308 8280 |||
SKU PRODUCTO OV-GHS1 OV-TPW1 OF-KK10 OGG-MKD71 OEP-E25 OEB-E95D OEB-E11D OEB-E02D-N OEB-E02D-B OEB-H89D OEB-E108D OPB-P113D-N OPB-P113D-B OPB-P115D-B OPB-P115D-N OPB-P204DQ **OPB-P300Q** OPB-P400Q OCD-C12 OCD-L12 OCC-21Dultra OCW-E101D OBS-03S OBS-31S OBS-72D OBS-04S-N OBS-04S-G OBS-04S-R OSW-11 OSW-2...
lang:en **score:35** filesize: 50.9 K page_count: 2 document_date: 2022-09-30