

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

- › [KERUI](#) /
- › [KERUI Wireless Doorbell Kit Instruction Manual](#)

## KERUI M525+F15

# KERUI Wireless Doorbell Kit Instruction Manual

Model: M525+F15

## PRODUCT OVERVIEW

---

The KERUI Wireless Doorbell Kit provides a reliable and convenient solution for home and office security. It features a waterproof push button transmitter and two plug-in receivers, offering a wide range of customizable melodies and adjustable volume levels. Designed for easy installation, this kit ensures you never miss a visitor.



Image: The complete KERUI Wireless Doorbell Kit, including the outdoor push button and two indoor plug-in receivers.

## SETUP AND INSTALLATION

---

The KERUI Wireless Doorbell Kit is designed for quick and easy setup. The units are pre-paired from the factory, allowing for immediate use upon receipt.

## Components:

- 1 x Wireless Push Button Transmitter
- 2 x Plug-In Receivers
- Mounting Accessories (Adhesive tape, screws, anchors)
- 1 x CR2032 Battery (pre-installed in transmitter)

## Installation Steps:

1. **Choose Location:** Select a suitable location for the push button transmitter, typically near your front door. Ensure the plug-in receivers are placed within the effective wireless range (up to 1000 feet in open space).



Image: Illustration of the doorbell's 1000ft long-range capability, suitable for various home layouts.

### 2. Mount the Push Button:

- **Adhesive Method:** Clean the mounting surface thoroughly. Peel off the protective film from the adhesive tape provided and firmly press the push button onto the desired location on your wall or door frame.

- **Screw Method:** For a more secure installation, use the included screws and anchors. Mark the drilling points, drill pilot holes, insert anchors, and then screw the push button into place.

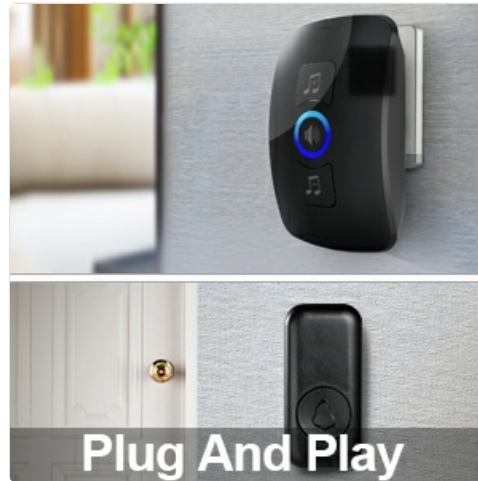


Image: The plug-in receiver ready for use in a standard wall outlet.

3. **Plug In Receivers:** Insert the plug-in receivers into standard electrical outlets in locations where you want to hear the chime, such as your living room, bedroom, or office.



Image: The doorbell system is versatile and can be used in various settings like homes, apartments, warehouses, and offices.

## OPERATING INSTRUCTIONS

---

The KERUI Wireless Doorbell offers customizable settings for melodies and volume to suit your preferences.

### Changing Melodies:

The doorbell features 60 different chimes. To change the melody:

1. On the receiver, press the **"Song+"** button to cycle through the available melodies.
2. Press the **"Song-"** button to go back to the previous melody.
3. The receiver will play a preview of each melody as you press the button.

### Adjusting Volume:

There are 5 levels of adjustable volume, ranging from 25 dB to 120 dB.

1. Press the **"Volume"** button (speaker icon) on the receiver to adjust the volume level.
2. Each press will cycle through the 5 volume settings.

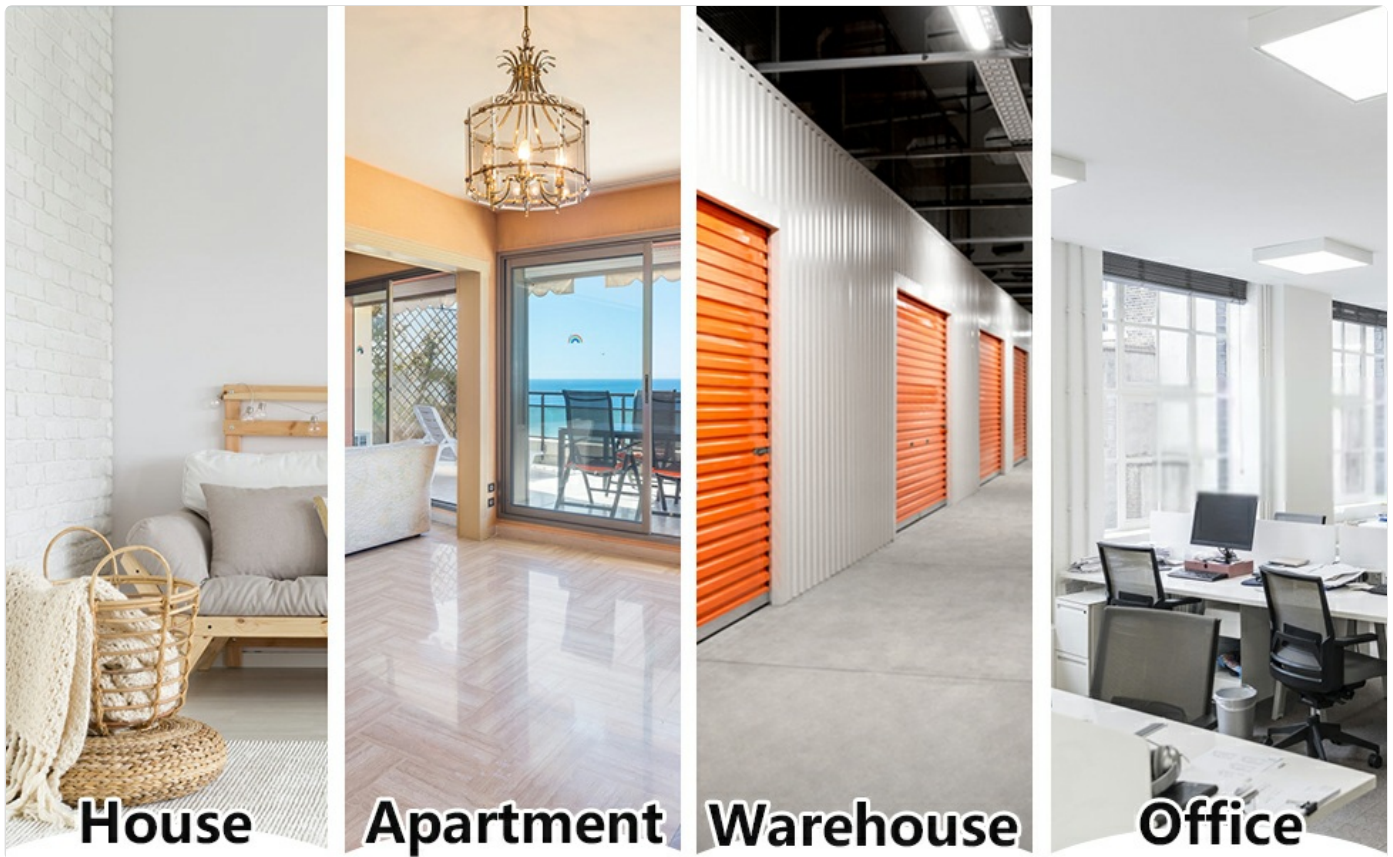


Image: Controls on the receiver for selecting from 60 melodies and adjusting 5 volume levels.

### LED Flash Indicator:

In addition to the audible chime, the receivers feature an LED flash indicator. This visual alert is particularly useful for the elderly, in noisy environments, or for individuals with hearing impairments.



Image: The receiver's LED flash light provides a visual alert when the doorbell is pressed.

## MAINTENANCE

---

Proper maintenance ensures the longevity and optimal performance of your KERUI Wireless Doorbell Kit.

### Waterproof Design:

The doorbell push button is IP55 waterproof and dustproof, designed to withstand various severe weather conditions. It can operate effectively in temperatures ranging from -10 °C to 50 °C.

# IP55 Waterproof



**3-Year**  
Maximum Lifespan



Image: The IP55 waterproof push button is built to endure outdoor elements, ensuring durability.

## Battery Replacement (Push Button):

The push button transmitter is powered by a CR2032 battery, which typically lasts up to 3 years. When the battery is low, the transmitter's LED indicator may dim or the signal range may decrease.

1. Carefully open the back cover of the push button transmitter.
2. Remove the old CR2032 battery.
3. Insert a new CR2032 battery, ensuring the positive (+) side is facing up.
4. Securely close the back cover.



Image: Visual guide for replacing the CR2032 battery in the wireless push button.

## TROUBLESHOOTING

---

If you encounter issues with your KERUI Wireless Doorbell Kit, please refer to the following common solutions:

- **No Sound from Receiver:**

- Ensure the receiver is properly plugged into a live electrical outlet.
- Check the volume level on the receiver; it might be set to the lowest setting or muted.
- Verify the push button battery is not depleted. Replace if necessary.
- Re-pair the transmitter and receiver if they have lost connection (refer to pairing instructions in the full manual, if available).

- **Limited Range:**

- Obstacles like thick walls, metal structures, or other electronic devices can interfere with the signal. Try relocating the receiver or push button.
- Ensure the push button battery is not low.

- **False Alarms:**

- Ensure the push button is securely mounted and not exposed to excessive vibration or direct impact.
- Check for any external interference from other wireless devices.

For persistent issues, please contact customer service.

## SPECIFICATIONS

---

Feature	Detail
Brand	KERUI
Model Number	M525+F15
Item Weight	0.634 ounces
Product Dimensions	4 x 3.5 x 3.5 inches
Color	Black-2 Receivers+1 Button
Power Source (Transmitter)	1 CR2032 battery (included)
Battery Cell Type	Lithium Ion
Waterproof Rating	IP55 (for push button)
Wireless Range	Up to 1000 feet (in open space)
Melodies	60 selectable chimes
Volume Levels	5 levels (25 dB to 120 dB)
Certifications	FCC, CE

## WARRANTY AND SUPPORT

---

KERUI offers a **12-month warranty** for this wireless doorbell kit. If you experience any problems or have questions regarding your doorbell chime, please do not hesitate to contact our dedicated customer service team for assistance. For support, please visit the [KERUI Store on Amazon](#) or refer to the contact information provided with your product

packaging.

© 2023 KERUI. All rights reserved.