Duravit 006588

Duravit Starck Stainless Steel Hinge Seat and Cover User Manual

Model: 006588 | Brand: Duravit

Introduction

This manual provides essential information for the installation, operation, and maintenance of your Duravit Starck Stainless Steel Hinge Seat and Cover. Designed for durability and comfort, this product features a white finish, robust stainless steel hinges, and a soft-close mechanism for quiet and gentle closing. Please read these instructions carefully before installation and retain them for future reference.

Safety Information

Always observe the following safety precautions:

- Ensure all components are present and undamaged before beginning installation.
- Do not use abrasive cleaners or harsh chemicals on the seat and cover, as this may damage the finish and material.
- Avoid excessive force when closing the seat or cover, even with the soft-close feature, to prevent damage to the hinges.
- Keep small parts out of reach of children to prevent choking hazards.
- If you are unsure about any step of the installation process, consult a qualified professional.

Package Contents

Verify that all the following items are included in your package:

- 1 x Duravit Starck Toilet Seat
- 1 x Duravit Starck Toilet Cover
- 2 x Stainless Steel Hinge Assemblies (with soft-close mechanism)
- Mounting Hardware (screws, washers, nuts)

Setup and Installation

Follow these steps for proper installation of your toilet seat and cover:

1. **Prepare the Toilet:** Ensure the toilet bowl is clean and dry. Remove any old toilet seat and hardware.
2. **Attach Hinges to Seat:** Insert the stainless steel hinge assemblies into the designated slots on the underside of the toilet seat. Ensure they are securely fitted.
3. **Position the Seat:** Place the assembled seat and cover onto the toilet bowl, aligning the hinge posts with the mounting holes on the toilet.
4. **Secure the Hardware:** From underneath the toilet bowl, thread the mounting screws through the holes and onto the hinge posts. Hand-tighten the nuts initially.
5. **Adjust and Tighten:** Adjust the seat position to ensure it is centered and aligned with the toilet bowl. Once satisfied, fully tighten the nuts using a suitable wrench, being careful not to overtighten.
6. **Test Soft-Close:** Gently lower the seat and cover to verify the soft-close mechanism operates smoothly and quietly.





Image: The Duravit Starck toilet seat in an open position, revealing the stainless steel hinges and the toilet bowl, illustrating the product's design and how it sits on the toilet.





Image: A side profile of the Duravit Starck toilet seat and cover, shown in an open position on a toilet, highlighting the sleek design and hinge mechanism from a different angle.

Operating Instructions

The Duravit Starck Stainless Steel Hinge Seat and Cover is designed for simple and quiet operation, primarily featuring a soft-close mechanism.

- **Opening:** Lift the toilet cover and/or seat manually to the desired open position.
- **Closing (Soft-Close):** To close, gently push the toilet cover and/or seat downwards. The integrated soft-close mechanism will engage, allowing the seat and cover to lower slowly and quietly without slamming. This feature prevents noise and reduces wear on the product.



Image: The Duravit Starck toilet seat and cover in a closed position, showcasing its clean, smooth white surface and minimalist design.

Maintenance and Care

Proper care will ensure the longevity and appearance of your Duravit toilet seat and cover:

- **Cleaning:** Use only mild soap and water with a soft cloth or sponge. Wipe the entire surface, including the hinges.
- **Drying:** Always dry the seat and cover thoroughly after cleaning to prevent water spots and maintain hygiene.
- **Avoid Harsh Cleaners:** Do not use abrasive cleaners, scouring pads, strong acids, alkalis, or solvents, as these can damage the finish and material of the seat and hinges.
- **Hinge Care:** Periodically check the hinge connections to ensure they remain tight. If they become loose, gently retighten the mounting hardware.

Troubleshooting

If you encounter any issues with your Duravit toilet seat and cover, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Seat is loose or wobbly.	Mounting hardware is not tight enough.	Tighten the nuts underneath the toilet bowl that secure the seat to the mounting holes. Do not overtighten.
Soft-close mechanism not working properly (slams).	Hinges may be damaged or obstructed.	Check hinges for any visible damage or debris. Ensure the seat is properly aligned. If the issue persists, the hinges may need replacement.

Problem	Possible Cause	Solution
Seat or cover appears discolored or stained.	Use of harsh cleaning agents or prolonged exposure to moisture.	Clean immediately with mild soap and water. Avoid using abrasive or chemical cleaners. Ensure surfaces are dried after cleaning.

Specifications

Detailed specifications for the Duravit Starck Stainless Steel Hinge Seat and Cover:

Brand: Duravit

Model Number: 006588

Color: White

Material: Stainless Steel (hinges), other materials for seat and cover

Style: Traditional

Shape: Oval

Product Dimensions: 16.54"L x 17.83"W (420mm L x 453mm W)

Item Weight: Approximately 5.06 pounds (2.3 Kilograms)

Features: Soft-close mechanism

GTIN: 04021534843365

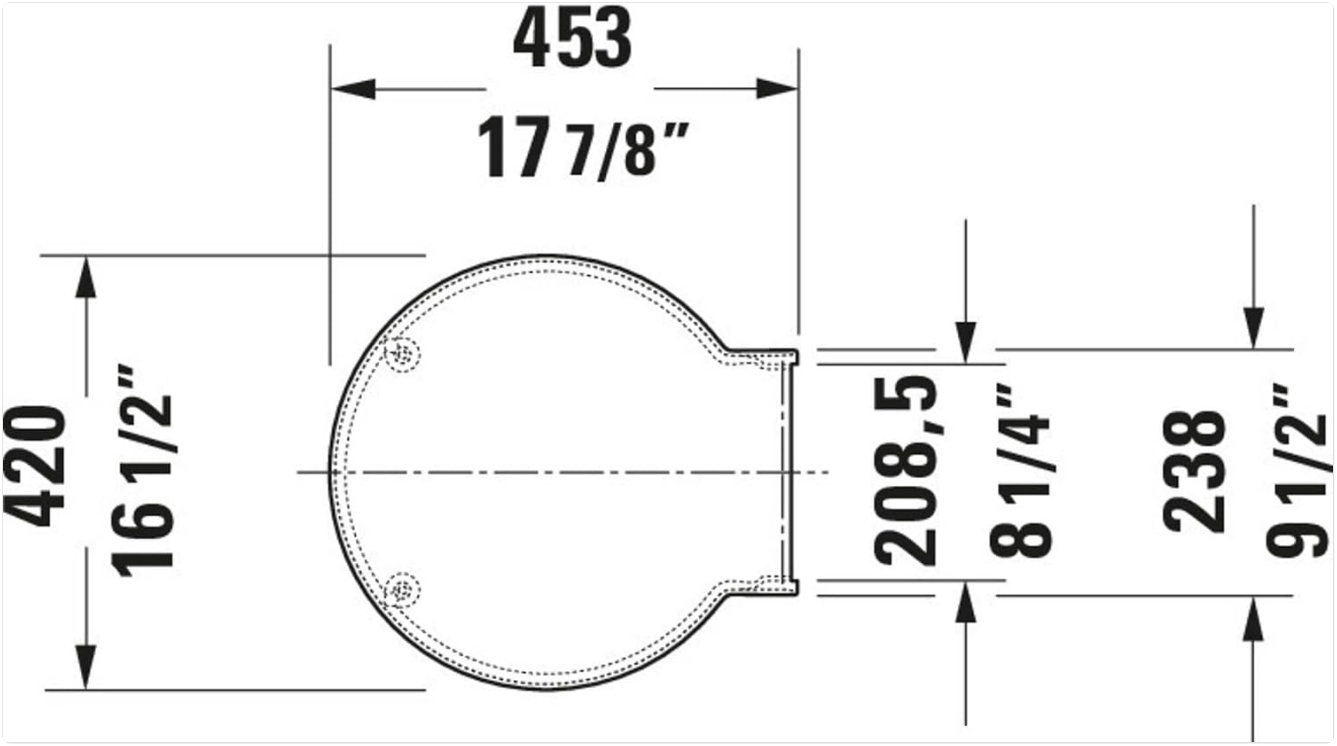


Image: A technical drawing providing precise dimensions of the Duravit Starck toilet seat, including length and width measurements in both inches and millimeters, crucial for fitment.

Warranty and Support

Specific warranty details for the Duravit Starck Stainless Steel Hinge Seat and Cover are not provided in the product data. For information regarding warranty coverage, claims, or technical support, please contact Duravit customer service directly or refer to the official Duravit website. Keep your purchase receipt as proof of purchase.

© 2025 Duravit. All rights reserved.