

[Manuals.plus](#) /

› [Standard Motor Products](#) /

› Standard Motor Products DS-3113 Convertible Top Switch User Manual

Standard Motor Products DS-3113

Standard Motor Products DS-3113 Convertible Top Switch User Manual

Model: DS-3113 | **Brand:** Standard Motor Products

INTRODUCTION

This manual provides essential information for the proper installation, operation, and maintenance of your Standard Motor Products DS-3113 Convertible Top Switch. Designed for consistent performance and durability, this switch is manufactured to meet or exceed strict quality requirements, ensuring it is the right fit for your vehicle and lifestyle.

The DS-3113 switch is engineered to deliver trouble-free operation, providing reliable control over your vehicle's convertible top mechanism.

PRODUCT OVERVIEW

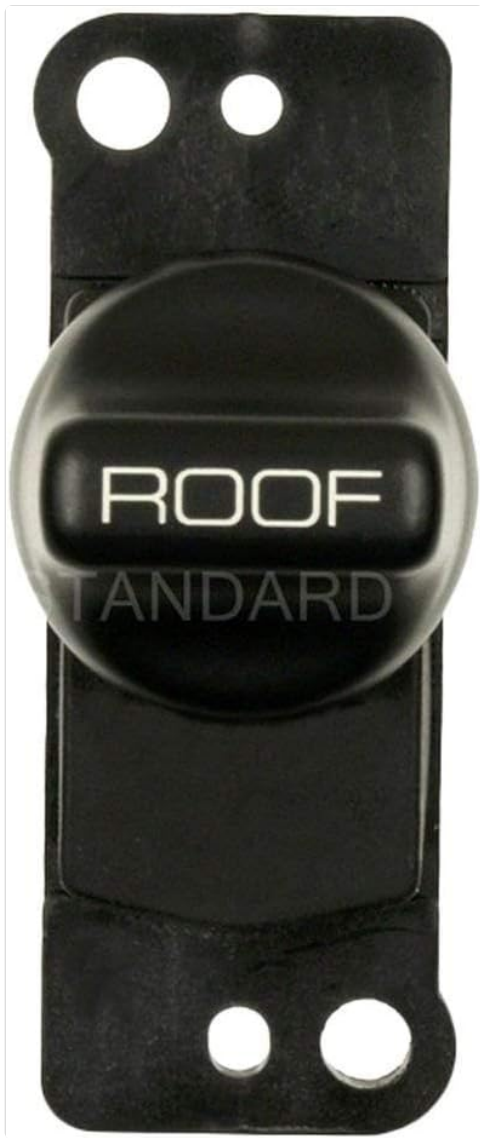


Figure 1: Front view of the DS-3113 Convertible Top Switch. This image shows the primary face of the switch, typically visible when installed, with the "ROOF" label indicating its function.



Figure 2: Rear view of the DS-3113 Convertible Top Switch. This view displays the electrical connector with 5 blade male terminals, essential for proper wiring and connection to the vehicle's electrical system.

SETUP AND INSTALLATION

The Standard Motor Products DS-3113 Convertible Top Switch is designed for specific vehicle applications. Proper installation is crucial for its functionality and safety. It is highly recommended that installation be performed by a qualified automotive technician.

Pre-Installation Checklist:

- Ensure the vehicle's battery is disconnected before beginning any electrical work.
- Verify that the DS-3113 switch is the correct part for your vehicle's make, model, and year.
- Gather necessary tools (e.g., screwdrivers, wire strippers, multimeter).
- Familiarize yourself with the vehicle's specific wiring diagrams for the convertible top system.

Installation Steps (General Guidance):

1. Locate the existing convertible top switch in your vehicle. This is typically found in the center console or dashboard.
2. Carefully remove any trim panels or fasteners securing the old switch.
3. Disconnect the electrical connector from the old switch. Note the orientation and wiring. The DS-3113 features a 5 blade male terminal connector.
4. Remove the old switch from its mounting location.
5. Connect the vehicle's electrical harness to the new DS-3113 switch, ensuring a secure and proper fit.
6. Mount the new switch into its designated location, securing it with any original fasteners or clips.
7. Reinstall any removed trim panels.
8. Reconnect the vehicle's battery.
9. Test the functionality of the new switch to ensure the convertible top operates correctly.

Note: Always refer to your vehicle's specific service manual for detailed installation instructions and safety precautions.

OPERATING INSTRUCTIONS

The Standard Motor Products DS-3113 Convertible Top Switch provides intuitive control over your vehicle's convertible roof system. Its operation is designed to be straightforward.

Basic Operation:

- To **lower** the convertible top, typically press and hold the switch in one direction (e.g., down or forward).
- To **raise** the convertible top, typically press and hold the switch in the opposite direction (e.g., up or backward).
- Release the switch once the convertible top has reached its fully open or closed position, or if you wish to stop it mid-cycle.

Important: Always ensure the vehicle is stationary and in a safe location before operating the convertible top. Refer to your vehicle's owner's manual for specific operational requirements, such as parking brake engagement or speed limitations.

MAINTENANCE

The DS-3113 Convertible Top Switch is a durable component designed for long-term reliability. Minimal maintenance is required, but adhering to these guidelines can help ensure its longevity and proper function.

General Maintenance Tips:

- **Keep Clean:** Periodically wipe the visible surface of the switch with a soft, dry cloth to remove dust and debris. Avoid using harsh chemicals or abrasive cleaners.
- **Avoid Moisture:** Protect the switch from excessive moisture or liquid spills, which can damage internal electrical components.

- **Inspect Connections:** If accessible during other vehicle maintenance, ensure the electrical connector remains securely attached and free from corrosion.
- **Gentle Operation:** Operate the switch with gentle, firm presses. Avoid excessive force or rapid, repeated toggling.

No user-serviceable parts are inside the switch. Do not attempt to disassemble the unit.

TROUBLESHOOTING

If you experience issues with your convertible top operation after installing the DS-3113 switch, consider the following common troubleshooting steps. For complex issues, professional diagnosis is recommended.

Common Issues and Solutions:

Problem	Possible Cause	Solution
Convertible top does not respond to switch.	◦ Loose or disconnected electrical connector. ◦ Blown fuse in the convertible top circuit. ◦ Vehicle conditions not met (e.g., parking brake, speed). ◦ Faulty wiring or relay in the vehicle's system. ◦ Faulty switch (less likely if new).	◦ Check and secure the electrical connection to the switch. ◦ Inspect and replace any blown fuses related to the convertible top. ◦ Refer to your vehicle's owner's manual for specific operating conditions. ◦ Consult a professional technician to diagnose electrical system issues. ◦ If all else fails, re-verify the switch installation and consider professional testing.
Convertible top operates intermittently.	◦ Poor electrical connection. ◦ Corrosion on terminals. ◦ Underlying issue with the convertible top motor or hydraulic system.	◦ Ensure connections are clean and tight. ◦ Inspect terminals for corrosion and clean if necessary (with battery disconnected). ◦ Seek professional automotive service for system diagnosis.

If troubleshooting steps do not resolve the issue, it is advisable to consult a certified automotive technician for further diagnosis and repair.

SPECIFICATIONS

Attribute	Detail
Brand	Standard Motor Products
Model Number	DS-3113
Manufacturer Part Number	DS-3113
UPC	025623752143
Item Weight	1 pounds

Attribute	Detail
Product Dimensions (L x W x H)	2 x 3 x 1 inches
Connectivity Protocol	Other
Unit Count	1.0 Count
Number of Items	1
Connector Type	5 Blade Male Terminals
Date First Available	September 8, 2012

WARRANTY AND SUPPORT

For specific warranty information regarding your Standard Motor Products DS-3113 Convertible Top Switch, please refer to the documentation provided with your purchase or contact Standard Motor Products directly. Warranty terms typically cover manufacturing defects.

If you have any questions, require fitment information for your vehicle, or need technical assistance, please contact the manufacturer or the seller from whom you purchased the product. Providing your product model number (DS-3113) and vehicle details will help expedite support.

You can often find contact information on the manufacturer's official website or through your product's retailer.

© 2024 Standard Motor Products. All rights reserved. This manual is for informational purposes only.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

<https://manuals.plus/asin/B0097W6JWA>

More documents and user manuals: <https://manuals.plus/>