

LEREKAM C2

LEREKAM Solar Spot Lights Outdoor (Model C2) - Instruction Manual

[Overview](#) [What's in the](#)[Box](#)[Setup](#)[Operation](#)[Maintenance](#)[Troubleshooting](#)[Specifications](#)[Warranty & Support](#)

1. PRODUCT OVERVIEW

The LEREKAM Solar Spot Lights Outdoor (Model C2) are designed to provide versatile and efficient outdoor lighting. These spotlights feature 40 bright LEDs, offering three distinct brightness modes to suit various lighting needs. They are equipped with dual charging capabilities, allowing them to be powered by solar energy during the day or via a USB cable for consistent performance, especially during periods of low sunlight. The lights are engineered for automatic operation, activating at dusk and deactivating at dawn. With an IP65 waterproof rating and a wide operating temperature range, they are built to withstand diverse weather conditions. Their 2-in-1 installation design allows for both ground staking and wall mounting, making them suitable for illuminating gardens, yards, patios, porches, pools, driveways, and more.

LEREKAM

SOLAR LANDSCAPE LIGHTS 4 PACK

Lighten your way home & brighten up your life



Image: LEREKAM Solar Spot Lights highlighting their IP65 waterproof, frost-resistant, and heat-resistant capabilities, suitable for various weather conditions.

OPTIMUM BRIGHT WHITE LIGHT, LANDSCAPE GARDEN LIGHT(DUSK TILL DAWN)

perfect for creating the right ambience for your front yard



Image: Examples of LEREKAM Solar Spot Lights used to illuminate palm trees, patios, porches, pools, yards, gardens, garages, driveways, pathways, and signposts.

2. WHAT'S IN THE BOX

Upon unboxing your LEREKAM Solar Spot Lights, you should find the following components:

- LEREKAM Solar Spot Lights (4 units)
- Ground Stakes (4 units)
- Wall Brackets (4 units)
- Mounting Screws and Wall Plugs
- USB Charging Cables (for optional charging)
- User Manual
- Batteries (pre-installed)

3. SETUP AND INSTALLATION

3.1 Initial Charging

Before first use, it is recommended to fully charge the solar lights. You can do this in two ways:

- **Solar Charging:** Place the lights in direct sunlight for at least 2 days to ensure a full charge.
- **USB Charging:** Use the provided USB cable to charge the lights for approximately 8 hours. The USB charging port is located on the backside of the solar panel.

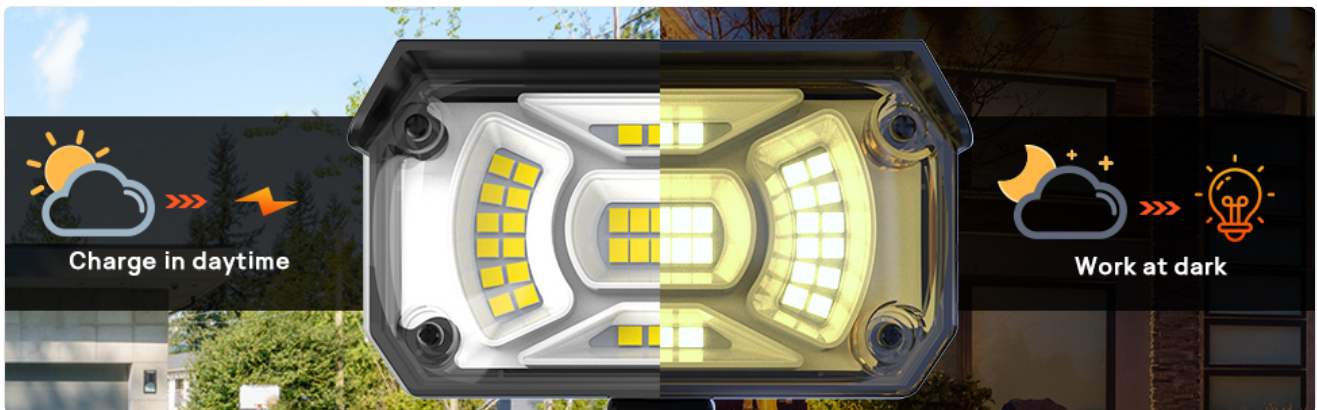


Image: Diagram illustrating the automatic daytime charging and nighttime illumination cycle of the solar spot lights.

3.2 Ground Stake Installation

For ground installation, follow these steps:

1. Attach the ground stake to the main light unit. Ensure it is securely fastened.
2. Select a location in your yard that receives ample direct sunlight throughout the day.
3. Gently push the assembled light into the ground. Avoid excessive force to prevent damage.
4. Adjust the angle of the solar panel to maximize sun exposure and the light head to direct illumination as desired.



Image: Detailed view of the ground stake component, used for inserting the light into soft ground.

3.3 Wall Mount Installation

For wall mounting, follow these steps:


1. Attach the wall bracket to the main light unit.
2. Choose a wall location that receives sufficient direct sunlight for the solar panel.
3. Mark the positions for drilling using the bracket as a guide.
4. Drill holes and insert the provided wall plugs.
5. Secure the light to the wall using the provided screws.
6. Adjust the angle of the solar panel and light head for optimal performance and illumination.



Image: Detailed view of the wall mount bracket, used for securing the light to a vertical surface.

A NIGHTLY LIGHT SHOW!

2 Installation Options

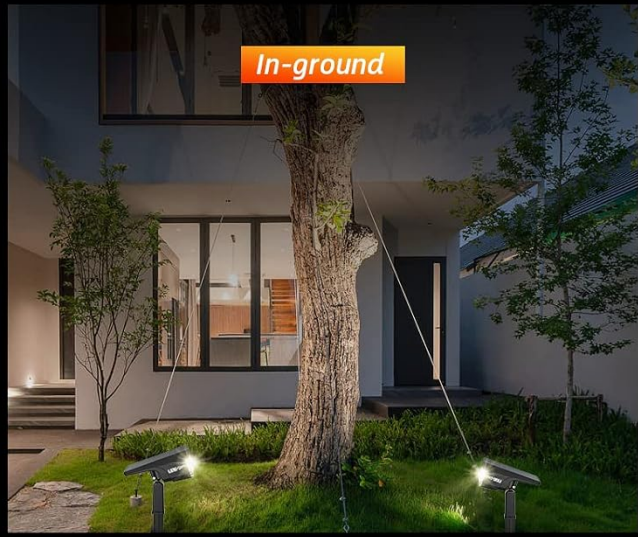

Optimum for Porch, Path, Pool, Yard, Garden, Garage, Driveway, Pathway, etc.

Image: Visual representation of the two installation options: wall-mounted and in-ground, showcasing their versatility in different outdoor settings.

4. OPERATING INSTRUCTIONS

4.1 Power Button and Brightness Modes

The LEREKAM Solar Spot Lights feature a power button on the back of the unit to control its operation and switch between brightness modes. Ensure the light is turned on before initial use.

- **Press once:** Strong Light Mode (100% Brightness, up to 8 hours)
- **Press twice:** Medium Light Mode (60% Brightness, up to 15 hours)
- **Press three times:** Low Light Mode (30% Brightness, up to 25 hours)
- **Press four times:** Turn off the light.



Image: Illustration of the three brightness modes (Strong, Medium, Low) and their respective maximum operating hours, along with the power button location.

4.2 Automatic Operation

The solar lights are designed to automatically detect ambient light conditions:

- During daylight hours, the solar panel absorbs sunlight and converts it into electrical energy, storing it in the internal battery. The light will remain off.
- At night or in dark conditions, the light will automatically switch from energy storage mode to illumination mode, turning on at your selected brightness setting.

5. MAINTENANCE

To ensure optimal performance and longevity of your LEREKAM Solar Spot Lights, consider the following maintenance tips:

- **Clean Solar Panel:** Regularly wipe the solar panel with a soft, damp cloth to remove dust, dirt, and debris. A clean panel ensures maximum sunlight absorption and efficient charging.
- **Positioning:** Periodically check the position of the solar panel to ensure it receives direct sunlight for the longest possible duration each day. Adjust as needed, especially with seasonal changes.
- **Weather Resistance:** The lights are IP65 waterproof and designed to withstand various weather conditions, including rain, snow, frost, and heat (operating temperature range from -20°C to 50°C). However, extreme weather events may temporarily affect performance.
- **Battery Life:** The internal batteries are designed for long-term use. If you notice a significant decrease in illumination time, ensure the lights are receiving adequate sunlight or consider using the USB charging option.

6. TROUBLESHOOTING

If your LEREKAM Solar Spot Lights are not functioning as expected, try the following:

- **Light does not turn on at night:**
 - Ensure the power button is pressed to an ON mode.
 - Verify the solar panel is receiving sufficient direct sunlight during the day. Relocate the light if

necessary.

- Check for any obstructions (e.g., leaves, dirt) on the solar panel and clean it.
- Perform an initial USB charge to ensure the battery has enough power.

• **Light duration is short:**

- The solar panel may not be receiving enough sunlight for a full charge. Ensure optimal placement.
- The selected brightness mode might be too high for the available charge. Try a lower brightness mode.
- Consider USB charging to fully replenish the battery.

• **Light flickers or is dim:**

- The battery charge may be low. Allow for more solar charging time or use USB charging.
- Ensure the solar panel is clean and free from obstructions.

7. SPECIFICATIONS

Feature	Detail
Brand	LEREKAM
Model Number	C2
Light Source	40 LEDs
Brightness Modes	3 (Strong, Medium, Low)
Charging Methods	Solar Powered, USB Charging
Water Resistance Level	IP65 Waterproof
Operating Temperature	-20°C to 50°C
Adjustability	360° Horizontal, 120° Vertical
Material	Plastic (Acrylonitrile Butadiene Styrene)
Item Dimensions (L x W x H)	4.8"L x 3.2"W x 1.8"H
Item Weight	7.36 ounces
Included Components	Batteries

8. WARRANTY & SUPPORT

For warranty information and customer support, please refer to the product packaging or contact the seller directly through your purchase platform. Keep your proof of purchase for any warranty claims.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question