

HANYCONY HN83T

HANYCONY Multi Plug Outlet Extender with USB C Ports (Model HN83T) - Instruction Manual

Model: HN83T | Brand: HANYCONY

1. INTRODUCTION

Thank you for choosing the HANYCONY Multi Plug Outlet Extender. This device is designed to expand your power options by converting a single wall outlet into multiple AC outlets and USB charging ports, while providing essential surge protection for your electronic devices. Please read this manual thoroughly before use to ensure safe and optimal operation.

2. PRODUCT FEATURES

- **11-in-1 Power Expansion:** Converts one wall socket into 8 AC outlets and 3 USB charging ports (2 USB-C, 1 USB-A), allowing simultaneous charging of up to 11 devices.
- **Widely Spaced Outlets:** Features 8 AC outlets strategically spaced on three sides to accommodate bulky power adapters without blocking adjacent ports.
- **Smart USB Charging:** Includes 2 USB-C ports (5V/3A Max) and 1 USB-A port (5V/2.4A Max) with intelligent detection to deliver optimal charging speed for various USB-powered devices like smartphones, tablets, and earphones.
- **900 Joule Surge Protection:** Protects your electronics from voltage spikes and power surges. A green "SURGE PROTECTED" indicator light confirms active protection.
- **Comprehensive Safety:** Built with fireproof PC shell (flame retardant at 1382°F) and equipped with overload, over-voltage, short circuit, over-current, and overheat protection mechanisms. ETL Listed, FCC, and RoHS certified for safety and quality assurance.
- **Space-Saving Design:** Compact wall-mounted design eliminates the need for long power cords, keeping your space tidy and organized.
- **Secure Installation:** Includes a stabilizing rod and screw for secure attachment to the wall outlet, preventing accidental dislodgement.

Multi Plug Outlet Extender

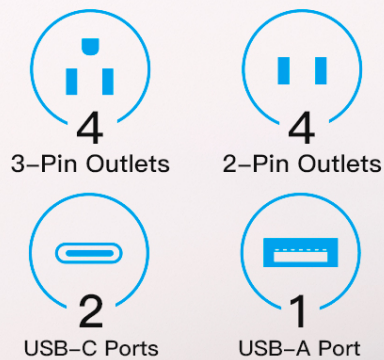


Figure 2.1: Overview of the HANYCONY Multi Plug Outlet Extender showing 8 AC outlets and 3 USB ports.

3. SAFETY INSTRUCTIONS

To prevent fire, electric shock, or injury, please follow these safety guidelines:

- Do not exceed the electrical ratings of 125V, 15A, 1875W.
- Do not use in wet or damp conditions. This product is for indoor use only.
- Keep away from children and pets.
- Do not disassemble or modify the product.
- Ensure the product is securely plugged into a grounded wall outlet.
- If the "SURGE PROTECTED" indicator light is off, the surge protection feature is no longer active. Replace the unit to maintain protection.
- Avoid plugging in high-power appliances that exceed the maximum wattage.

900J

Surge Protection

Protect devices from power surges



Figure 3.1: The green "SURGE PROTECTED" light indicates active surge protection.

4. SETUP INSTRUCTIONS

Follow these steps to properly install your HANYCONY Multi Plug Outlet Extender:

1. **Identify a Wall Outlet:** Choose a standard duplex wall outlet (125V) that you wish to expand. Ensure the outlet is in good condition and properly grounded.
2. **Prepare the Extender:** The extender features a stabilizing rod on the back. If your wall outlet has a central screw, you can use the provided screw to secure the extender. If your outlet does not have a central screw or is a GFCI/USB receptacle, the stabilizing rod can be carefully cut off to ensure a flush fit.
3. **Plug In:** Align the prongs of the extender with the bottom receptacle of your wall outlet and push firmly until it is fully seated.
4. **Secure (Optional):** If using the screw, insert it into the central hole of the extender and tighten it into the wall outlet's screw hole. This provides additional stability and prevents the extender from pulling out when unplugging devices.

Easy to Install

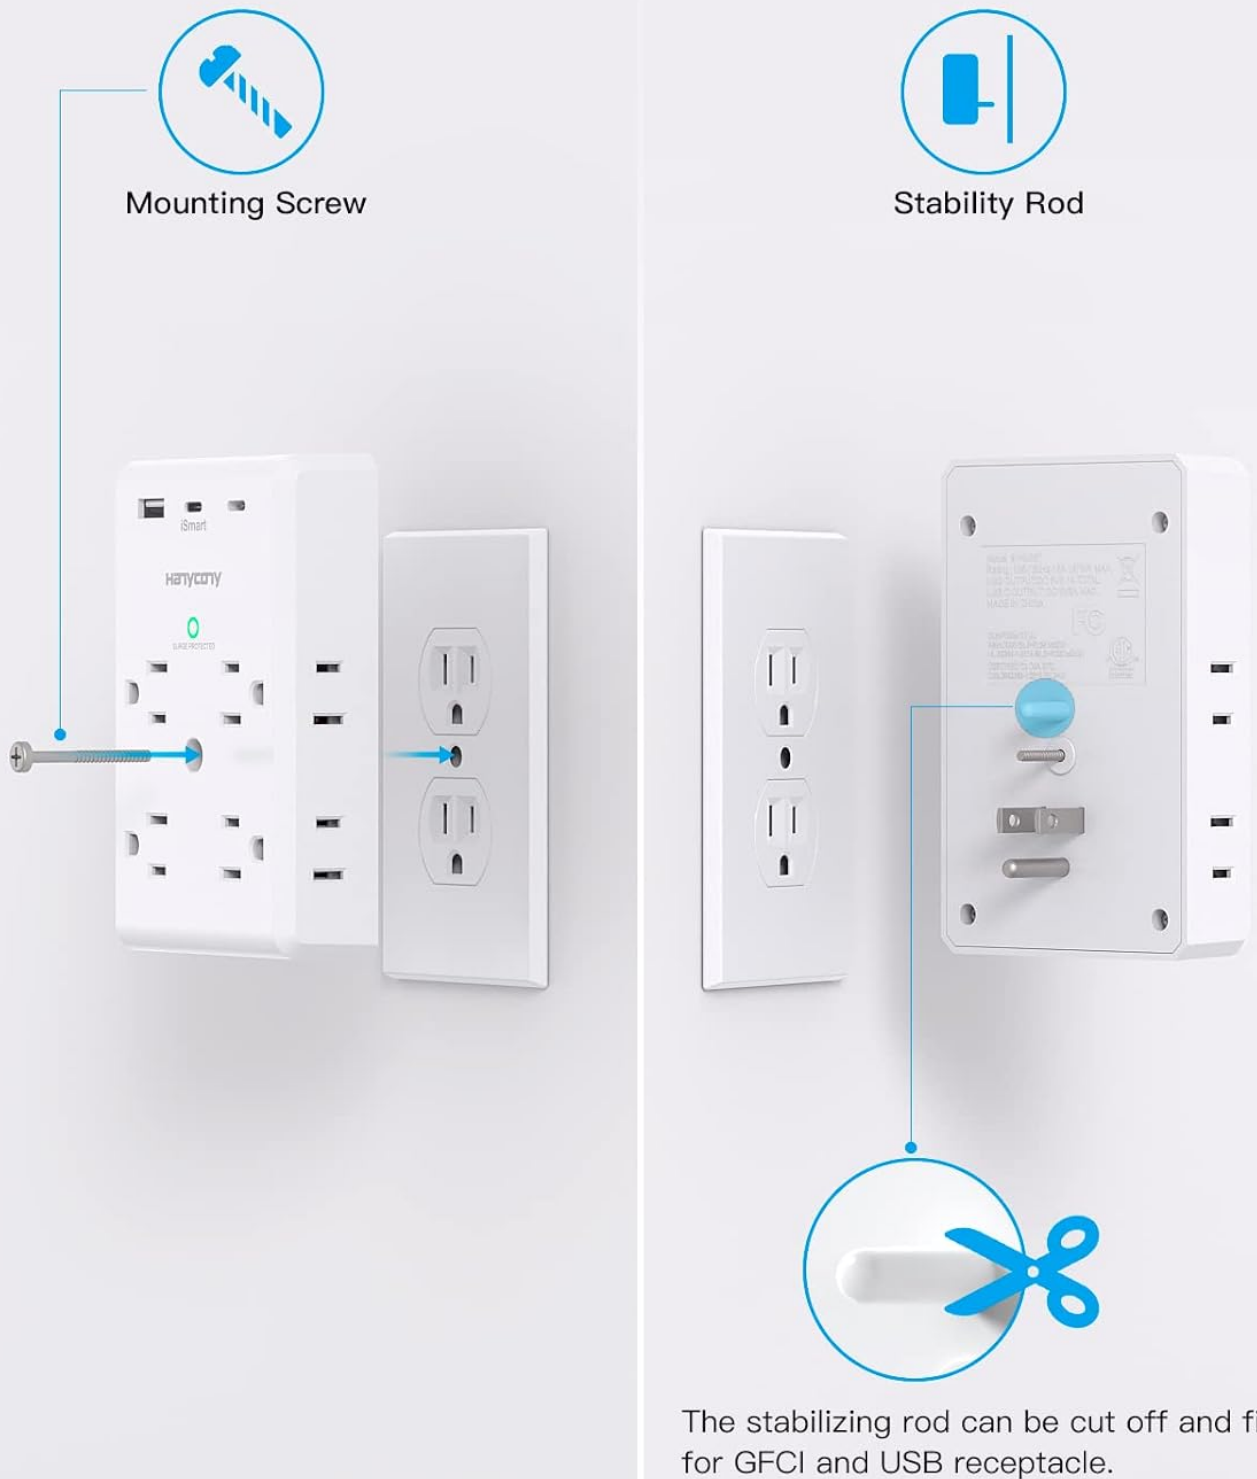


Figure 4.1: Installation guide for the HANYCONY Multi Plug Outlet Extender, illustrating the mounting screw and removable stability rod.

Your browser does not support the video tag.

Video 4.1: A user demonstrates the installation of the HANYCONY Multi Plug Outlet Extender, highlighting the secure screw attachment and multiple outlets.

5. OPERATING INSTRUCTIONS

Once installed, your HANYCONY Multi Plug Outlet Extender is ready for use:

- **AC Outlets:** Plug your standard 2-prong or 3-prong AC devices into any of the 8 available outlets. The wide spacing ensures that larger adapters can be used simultaneously.
- **USB Charging:** Connect your USB-powered devices to the USB-A (5V/2.4A Max) or USB-C (5V/3A Max) ports. The intelligent charging technology will automatically detect your device and deliver the optimal charging current.
- **Surge Protection Indicator:** The green "SURGE PROTECTED" light on the front of the unit indicates that your devices are protected from power surges. If this light is off, the surge protection has been compromised, and the unit should be replaced.

USB Wall Charger

Compatible with most USB devices



USB-C

5V/3.0A

USB-A

5V/2.4A



Figure 5.1: The USB-C and USB-A ports are compatible with most USB devices, providing efficient charging.

Your browser does not support the video tag.

Video 5.1: An official HANYCONY video showcasing the smart power strip's features and ease of use.

6. MAINTENANCE

To ensure the longevity and proper functioning of your outlet extender:

- **Cleaning:** Unplug the extender from the wall before cleaning. Use a dry, soft cloth to wipe the surface. Do not use liquid cleaners or aerosols.
- **Storage:** If not in use for an extended period, unplug the unit and store it in a cool, dry place away from direct sunlight.
- **Inspection:** Periodically inspect the unit for any signs of damage, such as cracks, frayed wires, or loose connections. Discontinue use if any damage is found.

7. TROUBLESHOOTING

If you encounter issues with your HANYCONY Multi Plug Outlet Extender, refer to the following common problems and solutions:

- **No Power to Devices:**
 - Ensure the extender is firmly plugged into a working wall outlet.
 - Check if the "SURGE PROTECTED" indicator light is on. If it's off, the surge protection may have expired, or an overload has occurred.
 - Verify that the devices plugged into the extender are functioning correctly when plugged directly into a wall outlet.
- **"SURGE PROTECTED" Light is Off:**
 - This indicates that the surge protection components have absorbed a power surge and can no longer provide protection. The AC outlets may still function, but your devices are no longer protected. It is recommended to replace the unit.
- **USB Ports Not Charging:**
 - Ensure your USB cable is securely connected to both the extender and your device.
 - Try a different USB cable or device to rule out cable or device issues.
 - Confirm that the total current draw from all USB ports does not exceed the maximum output (USB-C: 5V/3A Max, USB-A: 5V/2.4A Max).

8. SPECIFICATIONS

Feature	Detail
Model Number	HN83T
AC Outlets	8 (3-prong and 2-prong compatible)
USB-C Output	5V/3A Max (per port)
USB-A Output	5V/2.4A Max (per port)
Total USB Output	5V/3.1A Total

Surge Protection Rating	900 Joules
Electrical Rating	125V, 15A, 1875W Max
Product Dimensions	4.72 x 3.15 x 1.06 inches
Item Weight	6.7 ounces
Safety Certifications	ETL Listed, FCC, RoHS
Material	Fireproof PC Shell

9. WARRANTY AND SUPPORT

For warranty information, technical support, or any product-related inquiries, please refer to the official HANYCONY website or contact their customer service directly. Contact details are typically found on the product packaging or the manufacturer's official online channels.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page’s manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

