

[Manuals.plus](#) /

› [Miktver](#) /

› Miktver 10.1-inch Security Monitor (Model MK10-6) Instruction Manual

## Miktver MK10-6

# Miktver 10.1-inch Security Monitor (Model MK10-6) Instruction Manual

Comprehensive guide for setup, operation, and maintenance.

[Introduction](#)

[What's in the Box](#)

[Setup](#)

[Operation](#)

[Maintenance](#)

[Troubleshooting](#)

[Specifications](#)

[Warranty & Support](#)

## 1. INTRODUCTION

---

The Miktver 10.1-inch Security Monitor (Model MK10-6) is a versatile and compact display designed for various applications, including CCTV surveillance systems, home and office monitoring, and as a secondary display for computers or gaming consoles. Its high-quality 1024x600 resolution screen and multiple input options ensure clear visuals and broad compatibility.

This manual provides essential information for the proper installation, operation, and maintenance of your Miktver monitor. Please read it thoroughly before use to ensure optimal performance and longevity of the product.

## 2. WHAT'S IN THE BOX

---

Upon unpacking, please verify that all the following items are included:

- 1 x Miktver 10.1-inch Monitor
- 1 x Adjustable Stand
- 1 x DC Power Adapter
- 1 x User Manual

- 1 x Stand-Sticker (for stand stability)
- 1 x HDMI Cable
- 1 x VGA Cable



1x10.1 inch monitor




Adjustable Stand



DC Adapter



User Manual



Stand-Sticker



HDMI Cable

Figure 2.1: Contents of the Miktver 10.1-inch Monitor package. Includes the monitor, stand, power adapter, cables, and manual.

## 3. SETUP

### 3.1 Assembling the Stand

1. Carefully remove the monitor and adjustable stand from the packaging.
2. Attach the adjustable stand to the back of the monitor. Ensure it clicks securely into place or is fastened with the provided screws/knobs.

3. Place the monitor on a stable, flat surface. If desired, use the included stand-sticker for additional stability.

## Multi-Interface Support



Figure 3.1: The Miktver 10.1-inch Monitor with its adjustable stand, ready for desktop use.

# Built-in Dual Speaker



Sound Channel:  
HDMI/AV

Figure 3.2: Rear view of the monitor, highlighting VESA mount points for alternative wall installation (mounting bracket not included).

## 3.2 Connecting to a Power Source

- Connect the DC Power Adapter to the "DC 12V" port on the monitor.
- Plug the power adapter into a standard electrical outlet. The monitor should power on or enter standby mode.

## 3.3 Connecting Input Devices

The Miktver monitor supports multiple input types. Choose the appropriate cable and port for your device:

- **HDMI:** Use the HDMI cable to connect to devices such as computers, laptops, gaming consoles (e.g., Nintendo Switch), TV boxes, or DSLR cameras.
- **VGA:** Use the VGA cable to connect to older computers or laptops.
- **BNC:** Connect CCTV cameras or NVR systems using a BNC cable.
- **AV (RCA):** Use RCA cables (yellow for video, red/white for audio) to connect to devices like DVD players or older surveillance equipment.

# Multi Interface & Applications

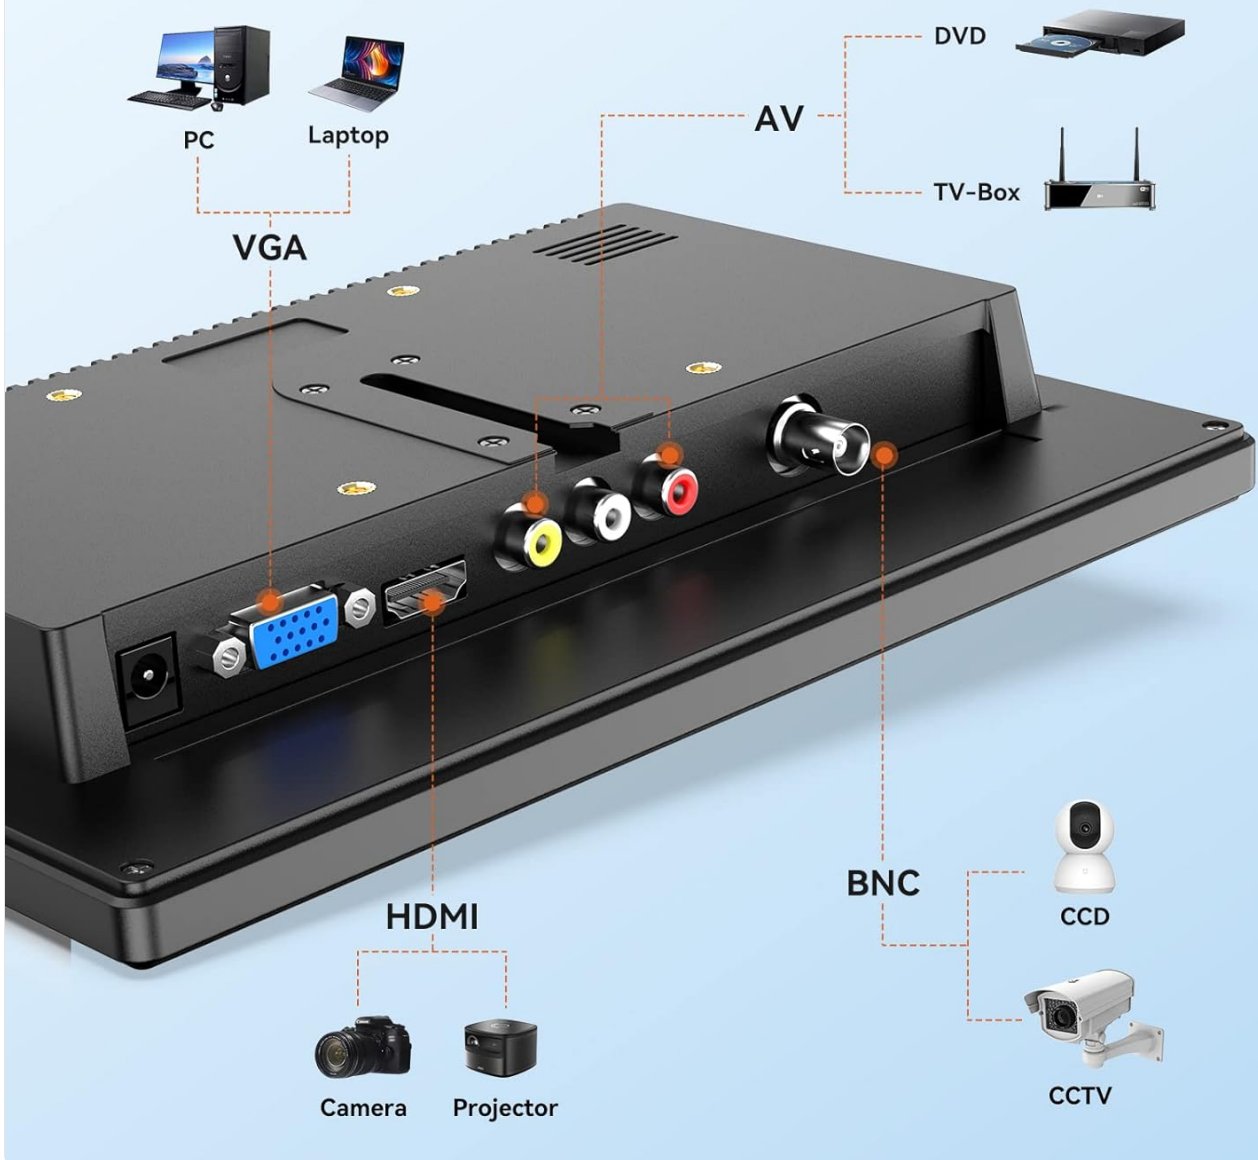


Figure 3.3: Rear view of the monitor displaying its multiple input interfaces for diverse connectivity options.

# Two-way Installation



Figure 3.4: Illustration of the monitor's multi-interface support, showing connections to various devices.

## 4. OPERATING INSTRUCTIONS

---

### 4.1 Power On/Off

Press the **Power** button located on the front panel or use the remote control to turn the monitor on or off.

### 4.2 Selecting Input Source

Press the **Input/Source** button on the front panel or the remote control to cycle through available input sources (HDMI, VGA, BNC, AV). The monitor will automatically detect an active signal.

### 4.3 Menu Navigation

Use the **Menu** button to access the on-screen display (OSD) menu. Navigate through options using the arrow buttons and confirm selections with the **Enter/OK** button. Adjust settings such as brightness, contrast, color, and aspect ratio.

## 4.4 Volume Control

The monitor features built-in dual speakers. Adjust the volume using the **Volume Up (+)** and **Volume Down (-)** buttons on the front panel or the remote control.

# 10.1 inch 1024x600 Security Monitor



**1024x600**  
Display



**16 : 9**  
Aspect Ratio



**Built-in**  
Speakers



Figure 4.1: The monitor's display quality and integrated dual speakers for audio output.

# Built-in Dual Speaker



Figure 4.2: Rear view of the monitor, illustrating the position of the dual speakers and various input ports.

## 4.5 Using as a Secondary Monitor

Connect the monitor to your computer or laptop via HDMI or VGA. You can configure it as an extended display or duplicate your main screen through your operating system's display settings.

# Multi-Interface Support



Figure 4.3: The monitor functioning as a secondary display alongside a laptop, enhancing workspace.

## 4.6 Surveillance Applications

The monitor is ideal for CCTV and NVR systems. Connect your surveillance equipment using BNC or AV inputs to monitor your home, office, or warehouse with its clear 1024x600 display and wide viewing angle.

# Two-way Installation



Figure 4.4: The monitor displaying multiple camera feeds, demonstrating its utility in surveillance setups.

## 4.7 Viewing Angle

The monitor features a 178° wide viewing angle, ensuring consistent image quality and color from various perspectives.

Your browser does not support the video tag.

Video 4.5: Miktver 10.5 inch Small Monitor overview. This video demonstrates the monitor's features and various uses, including its wide viewing angle and multiple input options.

## 5. MAINTENANCE

---

- **Cleaning:** Use a soft, lint-free cloth to gently wipe the screen and exterior. Avoid abrasive cleaners or solvents.
- **Storage:** When not in use for extended periods, store the monitor in a cool, dry place, away from direct sunlight and extreme temperatures.

- **Handling:** Avoid dropping or subjecting the monitor to strong impacts.

## 6. TROUBLESHOOTING

Problem	Possible Cause	Solution
No Power	Power adapter not connected or faulty.	Ensure the power adapter is securely connected to the monitor and a working power outlet.
No Signal	Incorrect input source selected or cable not connected.	Press the Input/Source button to select the correct input. Check that the video cable is securely connected to both the monitor and the source device.
No Sound	Volume too low or muted; audio cable not connected (for AV/VGA).	Increase volume. Ensure audio cables are connected for AV/VGA sources. HDMI carries audio automatically.
Poor Picture Quality	Incorrect resolution or display settings.	Adjust brightness, contrast, and color settings via the OSD menu. Ensure your source device is outputting a compatible resolution (e.g., 1024x600).

## 7. SPECIFICATIONS

Feature	Detail
Brand	Miktver
Model Number	MK10-6
Screen Size	10.1 Inches
Resolution	1024 x 600 (SVGA Wide)
Aspect Ratio	16:9
Image Brightness	200 Candela
Viewing Angle	178° (IPS Panel)
Input Interfaces	HDMI, VGA, BNC, AV (RCA)
Audio	Built-in Dual Speakers
Voltage	12 Volts
Product Dimensions	13.97 x 10.03 x 2.75 inches
Item Weight	2.57 pounds

Feature	Detail
Screen Surface	Glossy

## 8. WARRANTY AND SUPPORT

---

Miktver offers a **one-year warranty** for the 10.1-inch Security Monitor (Model MK10-6) from the date of purchase. Additionally, a **one-month free exchange** service is provided for any manufacturing defects. For technical support, warranty claims, or any inquiries regarding your product, please contact Miktver customer service through the official channels provided at the time of purchase or on the product packaging.