

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

› [SMALLRIG](#) /

› [SmallRig Super Clamp Mount with Mini Ball Head Mount \(Model WV01RCA08403\) Instruction Manual](#)

## SMALLRIG WV01RCA08403

# SmallRig Super Clamp Mount with Mini Ball Head Mount (Model WV01RCA08403)

Instruction Manual

## INTRODUCTION


The SmallRig Super Clamp Mount with Mini Ball Head Mount is a versatile accessory designed for attaching various photographic and videographic equipment to a wide range of surfaces. Constructed from durable aluminum alloy and stainless steel, this clamp kit provides a secure mounting solution for devices weighing up to 1.5kg (3.3lbs). Its adjustable jaw and 360-degree articulating ball head offer flexibility for optimal positioning of your gear.

## WHAT'S INCLUDED

- 1 x Clamp Mount
- 1 x 1/4"-20 Screw with Cold Shoe Ball Head Mount
- 1 x Hex Spanner

# Package Includes

- 1 x Hex Spanner
- 1 x Ball Head Mount
- 1 x Super Clamp Mount
- 1 x 1/4"-20 Screw with Cold Shoe

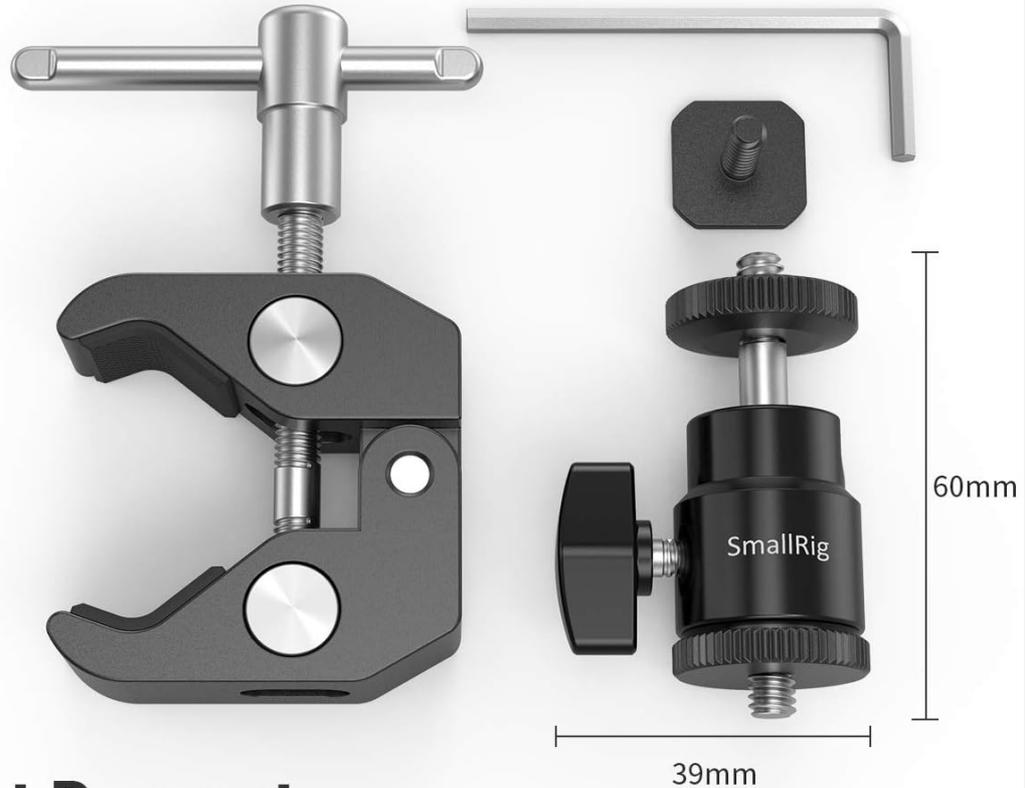

## Product Parameter

ID	Material(s)	Net Weight
1124	Aluminum Alloy	200g

Image: The package includes the clamp mount, 1/4"-20 screw with cold shoe ball head mount, and a hex spanner. Product dimensions and weight are also shown.

### SETUP


- Assemble the Ball Head Mount:** The ball head mount comes with a 1/4"-20 screw. If you intend to use it with the cold shoe adapter, ensure it is securely attached. If you need to remove the cold shoe adapter, unscrew it from the base of the ball head.
- Attach Ball Head to Clamp:** The clamp features a 1/4"-20 threaded hole. Screw the ball head mount onto this threaded hole on the clamp. Use the provided hex spanner to tighten the screw for a secure connection.
- Adjust the Clamp Jaw:** The clamp jaw can be adjusted from 15mm (0.6") to 40mm (1.57") using the T-shape bar. Rotate the T-shape bar to open or close the jaws to fit your desired mounting surface. The jaws are equipped with protective rubber padding to prevent damage.

# Two Ways to Use



Cold Shoe Ballhead

Clamp

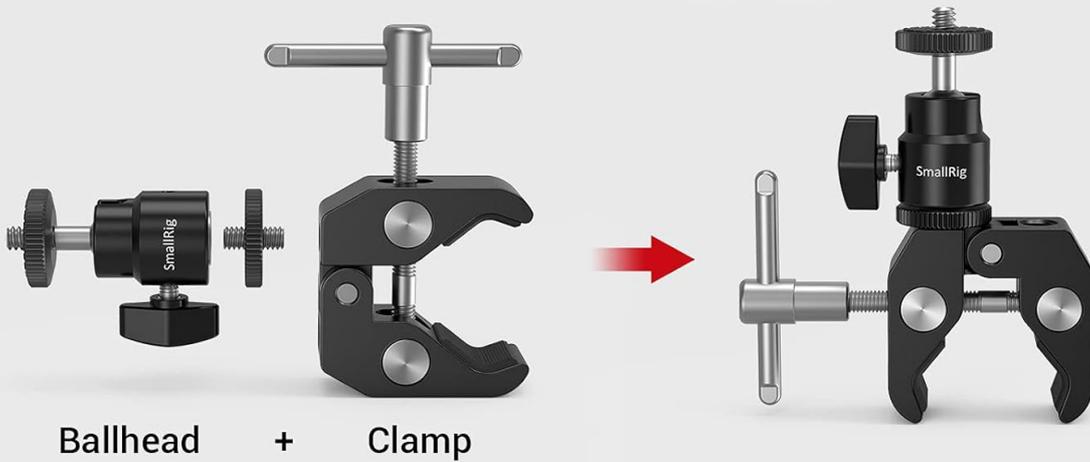

Ballhead

+

Clamp

Image: This illustration shows the two primary components: the cold shoe ball head and the clamp. It also demonstrates how to combine them by screwing the ball head onto the clamp.

## Soft Rubber



Features the soft rubber to protect your accessories from scratching

## 1/4"-20 Screw



You could mounts the monitor or the LED Lights via 1/4"-20 screw

## Adjusted with Ease



Flexible adjustment of the clamp and ball head by two knobs

Image: A detailed view highlighting the soft rubber padding for protection, the 1/4"-20 screw for device attachment, and the adjustable knobs for flexible positioning.


<p><b>Best Load &lt; 3kg</b></p> 	<p><b>Opening Range: 15 - 40mm</b></p> 	<p><b>Two Ways to Use</b></p> 
<p>The best load of this super clamp mount is 3kg (6.6lb)</p>	<p>The opening of this super clamp can adjust from 15mm to 40mm</p>	<p>Two ways to use: The base can be switched to a cold shoe mount or a 1/4"-20 screw.</p>

Image: This graphic displays the maximum load capacity of 3kg (6.6lbs), the adjustable jaw opening from 15mm to 40mm, and two usage methods: with a cold shoe base or a 1/4"-20 screw.

## OPERATING

- 1. Mount Your Device:** Attach your monitor, action camera, LED light, microphone, flash, or any other gear with a 1/4" thread to the 1/4"-20 screw on the ball head mount. Ensure it is tightened securely.
- 2. Secure the Clamp:** Position the clamp on your desired surface (e.g., table, desk, rod, tripod leg). Rotate the T-shape bar to tighten the clamp jaws firmly around the surface. The protective rubber pads will help prevent slippage and damage.
- 3. Adjust Viewing Angle:** Use the wing nut on the ball head to loosen or tighten the articulation. This allows for 360-degree rotation and tilt, enabling you to achieve the perfect viewing or recording angle. Once adjusted, tighten the wing nut to lock the position.

# Usage Scenarios

You could mount the monitor or LED Lights via 1/4" screw on the top and attach the rod by using the clamp on the bottom



Image: This image demonstrates wide application scenarios, showing the clamp securely holding a GoPro on a tripod leg and an LCD monitor on a bicycle handlebar, highlighting its versatility.

# 360° Rotation Ball Head

It could attach and detach from a monitor quickly and the position of the monitor is adjustable as per your needs during



Image: This visual emphasizes the 360-degree rotation capability of the ball head, allowing users to quickly adjust the monitor's position as needed.

Your browser does not support the video tag.

Video: An official SmallRig video demonstrating the Super Clamp Mount in action, showing its ease of use and stability when mounting accessories.

- **Cleaning:** Wipe the clamp and ball head with a soft, dry cloth to remove dust and debris. Avoid using harsh chemicals or abrasive materials that could damage the finish or rubber padding.
- **Inspection:** Periodically check all screws and moving parts to ensure they are tight and functioning correctly. If any part feels loose, tighten it with the provided hex spanner or appropriate tool.
- **Storage:** Store the clamp in a dry, clean environment away from extreme temperatures and humidity to prolong its lifespan.

## TROUBLESHOOTING

- **Clamp not holding securely:** Ensure the T-shape bar is fully tightened. Check that the surface you are clamping to is within the 15mm-40mm jaw range. The rubber padding should be intact and clean for optimal grip.
- **Ball head not staying in position:** Tighten the wing nut on the ball head firmly. If the issue persists, ensure the 1/4"-20 screw connecting the ball head to the clamp is also tight.
- **Device wobbles on ball head:** Verify that your device is securely screwed onto the 1/4"-20 thread of the ball head.

## SPECIFICATIONS

<b>Product Dimensions</b>	3.74 x 3.35 x 0.98 inches (9.5 x 8.5 x 2.5 cm)
<b>Item Weight</b>	0.704 ounces (0.02 kg)
<b>Material</b>	Aluminum Alloy, Stainless Steel
<b>Max Load Capacity</b>	1.5 kg (3.3 lbs)
<b>Clamp Opening Range</b>	15mm - 40mm (0.6" - 1.57")
<b>Mounting Points</b>	1/4"-20 Screw, Cold Shoe Mount
<b>Model Number</b>	WV01RCA08403
<b>UPC</b>	692833209912

## WARRANTY & SUPPORT

For warranty information and customer support, please refer to the official SmallRig website or contact their customer service directly. Keep your purchase receipt for any warranty claims.