

UPBRIGHT Audio Centron Eclipse ACM-24 Power Cord

UpBright AC Adapter for Audio Centron Eclipse ACM-24, GE-215, GE-131, FXP Processors - Instruction Manual

INTRODUCTION

This manual provides essential instructions for the safe and efficient use of your UpBright AC Adapter. This power supply is designed to provide reliable power to compatible Audio Centron Eclipse devices, including the ACM-24 Mixing Console, GE-215 and GE-131 Octave Equalizers, and FXP Advanced Multi-Editor Effects Processor. Please read this manual thoroughly before use and retain it for future reference.

SAFETY INFORMATION

To prevent electric shock, fire, or damage to the product and connected devices, always follow these safety precautions:

- Ensure the adapter's voltage and current ratings match the requirements of your device.
- Do not expose the adapter to water, moisture, or extreme temperatures.
- Avoid dropping or subjecting the adapter to severe impact.
- Do not attempt to open or modify the adapter. There are no user-serviceable parts inside.
- Always unplug the adapter from the wall outlet before disconnecting it from your device.
- Keep the adapter away from children.
- If the adapter or its cord is damaged, discontinue use immediately and replace it.

PACKAGE CONTENTS

Your package should contain the following item:

- 1 x UpBright AC Adapter (Model: Audio Centron Eclipse ACM-24 Power Cord)



Image: The UpBright AC Adapter, showing the main unit and attached power cord.

SETUP

Follow these steps to properly set up your UpBright AC Adapter:

1. **Verify Compatibility:** Ensure your Audio Centron Eclipse device requires a 9-10VAC power input with a current draw between 1.3A and 2A. This adapter is specifically designed for models such as the ACM-24 Mixing Console, GE-215/GE-131 Octave Equalizers, and FXP Advanced Multi-Editor Effects Processor.
2. **Connect to Device:** Insert the barrel connector end of the AC adapter cable firmly into the power input jack of your Audio Centron Eclipse device.
3. **Connect to Power Outlet:** Plug the AC adapter's two-prong plug into a standard 120VAC wall outlet. If you received an international outlet adapter for your region (e.g., AU, EU, UK), attach it to the main adapter plug before inserting into the wall outlet. Ensure the outlet is easily accessible.
4. **Power On:** Once connected, you can power on your Audio Centron Eclipse device according to its own instruction manual.




THIS PRODUCT COMES WITH A UPBRIGHT®

LIMITED WARRANTY CERTIFICATE
+ UpBright® LIMITED WARRANTY



Image: The UpBright AC Adapter, highlighting the barrel connector for device connection.

Come With A Suitable Outlet Adapter (Only One) to Fit
Your Country/Area For International Order

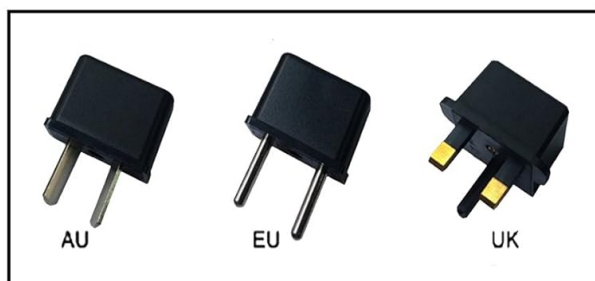

THIS PRODUCT COMES WITH A UPBRIGHT®

LIMITED WARRANTY CERTIFICATE
+ UpBright® LIMITED WARRANTY



Image: Examples of international outlet adapters (AU, EU, UK) that may be included for international orders.

OPERATING INSTRUCTIONS

The UpBright AC Adapter operates automatically once connected to a power source and a compatible device. It converts the incoming AC voltage to the required 9-10VAC for your Audio Centron Eclipse equipment.

- Ensure all connections are secure before powering on your Audio Centron device.
- The adapter is designed for continuous operation within its specified limits.
- To disconnect power, always unplug the adapter from the wall outlet first, then from the device.

MAINTENANCE

The UpBright AC Adapter requires minimal maintenance to ensure long-term performance:

- **Cleaning:** Disconnect the adapter from all power sources before cleaning. Use a soft, dry cloth to wipe the exterior. Do not use liquid cleaners or solvents.
- **Storage:** When not in use, store the adapter in a cool, dry place, away from direct sunlight and moisture. Avoid tightly coiling the cable to prevent damage.
- **Inspection:** Periodically inspect the adapter and its cable for any signs of damage, such as cuts, fraying, or bent prongs. If damage is found, replace the adapter immediately.

TROUBLESHOOTING

If you encounter issues with your UpBright AC Adapter, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Device does not power on.	Adapter not properly plugged in.	Ensure both ends of the adapter are securely connected.
	Wall outlet is not functioning.	Test the wall outlet with another device.
	Adapter or cable is damaged.	Inspect the adapter and cable for visible damage. Replace if damaged.
	Device power input issue.	Consult your device's manual or manufacturer for further troubleshooting.
Adapter feels excessively hot.	Overload or short circuit.	Immediately unplug the adapter. Verify device compatibility and current draw.
	Poor ventilation.	Ensure the adapter is in a well-ventilated area. If overheating persists, discontinue use and replace.

SPECIFICATIONS

Brand	UPBRIGHT
Model Number	Audio Centron Eclipse ACM-24 Power Cord
Input Voltage	120VAC (for US market, as per product description)
Output Voltage	9-10VAC
Current Rating	1.3A - 2A (1300mA - 2000mA)
Connector Type	Barrel Connector
UPC	608415827207
ASIN	B00DN8OLPQ



Image: The UpBright AC Adapter, showing the product label with model and electrical specifications.

WARRANTY INFORMATION

This UpBright AC Adapter comes with a limited warranty. Please refer to the warranty certificate included with your purchase for specific terms, conditions, and duration of coverage. The warranty typically covers manufacturing defects under normal use.



THIS PRODUCT COMES WITH A UPBRIGHT®

LIMITED WARRANTY CERTIFICATE
+ UPBRIGHT® LIMITED WARRANTY



Image: A visual representation indicating that the product includes a limited warranty certificate.

SUPPORT

For technical assistance, warranty claims, or further inquiries regarding your UpBright AC Adapter, please contact the manufacturer directly. Refer to the contact information provided on your product packaging or the official UpBright website.

For general information about UpBright products, you may visit the [UPBRIGHT Store on Amazon](#).