

[Manuals.plus](#) /

› [Comtec](#) /

› Comtec Pure Crystal Film CPF92VS LCD Protective Film for ZERO 92VS/FX-07 Radar Detectors

Comtec CPF92VS

Comtec Pure Crystal Film CPF92VS Instruction Manual

For ZERO 92VS / FX-07 Radar Detectors

Model: CPF92VS | Brand: Comtec

1. PRODUCT OVERVIEW

The Comtec Pure Crystal Film CPF92VS is an LCD protective film specifically designed for the Comtec ZERO 92VS and FX-07 radar detectors. This film is engineered to enhance screen clarity, protect against scratches, and resist fingerprints, ensuring optimal visibility and durability for your device's display.



レーダー探知機専用 液晶保護フィルム

ピッタリ
サイズ



対応機種: ZERO92VS / FX-07

特長

- 専用フィルムだからピッタリサイズ!
- 高光沢!
- 指紋防止!
- ハードコート
- なんどでも貼り直しOK
- 気泡押し出し簡単
- クリーニングクロス入

COMTEC

Image 1: Comtec Pure Crystal Film packaging and key features overview.

2. PACKAGE CONTENTS

Verify that all items are present in the package:

- 1 x LCD Protective Film
- 1 x Cleaning Cloth

3. FEATURES

The Pure Crystal Film offers several key features:

- **High Gloss:** A newly developed special surface treatment makes the LCD clearer. It boasts a front light transmittance of 92% and a haze value (cloudiness) of 0.7%, ensuring high brightness without

white blur.

- **Fingerprint and Sebum Stain Prevention:** The film's surface is designed so that fingerprints and sebum spread thinly, making them less noticeable. Any attached stains can also be easily wiped off.
- **2H Pencil Hardness Hard Coat:** This hard coating prevents fine scratches, helping to maintain the clarity and integrity of the LCD screen over time.
- **Special Silicone Layer (Patented) on Adhesive Surface:** The film uses a special silicone layer for adhesion, not traditional glue. This allows for multiple re-applications. Additionally, because it adheres by vacuum suction, pushing out air bubbles during application is simple.

自然な触り心地

透明感

保護フィルムをつけていないときの
なめらかな操作性と透明感を実現!



高光沢
新開発の特殊表面加工

高光沢で液晶をより鮮明に。全光線透過率91%、ヘイズ(曇り度)値も0.39%と明度が高く白ボケすることはありません。



指紋や皮脂などの
汚れ防止

指紋や皮脂などが薄く広がり目立ちにくくなります。また、付着した指紋や皮脂の汚れなども簡単に拭きとれます。



鉛筆硬度3Hの
ハードコート

細かな擦りキズなどを防ぎ液晶画面の鮮明度を保ちます。



なんどでも
貼り直しOK

接着面にのりを使用していないので、なんどでも貼り直すことができます。また、真空吸着で貼るため、貼り付け時の気泡の押し出しも簡単です。


Image 2: Detailed explanation of the film's high gloss, fingerprint resistance, hard coat, and re-applicability features.

4. INSTALLATION GUIDE

Follow these steps to correctly apply the LCD protective film:


1. **Clean the LCD Screen:** Use the included cleaning cloth to thoroughly wipe away any dust, dirt, or oil from the LCD screen. Ensure the screen is completely clean and dry before proceeding.
2. **Peel off the Adhesive Surface Protective Sheet (A) and Apply to the LCD Screen:** Determine the application position. Slowly peel off the protective sheet labeled 'A' from the adhesive side of the film. Carefully align the film and apply it to the LCD screen, ensuring no air bubbles are trapped. If bubbles appear, gently push them out towards the edges. *Do not touch the adhesive surface.*
3. **Peel off the Surface Protective Sheet (C):** Once the film is applied, peel off the protective sheet labeled 'C' (the top layer with the tag) from the surface of the film.

液晶保護フィルムの貼り方

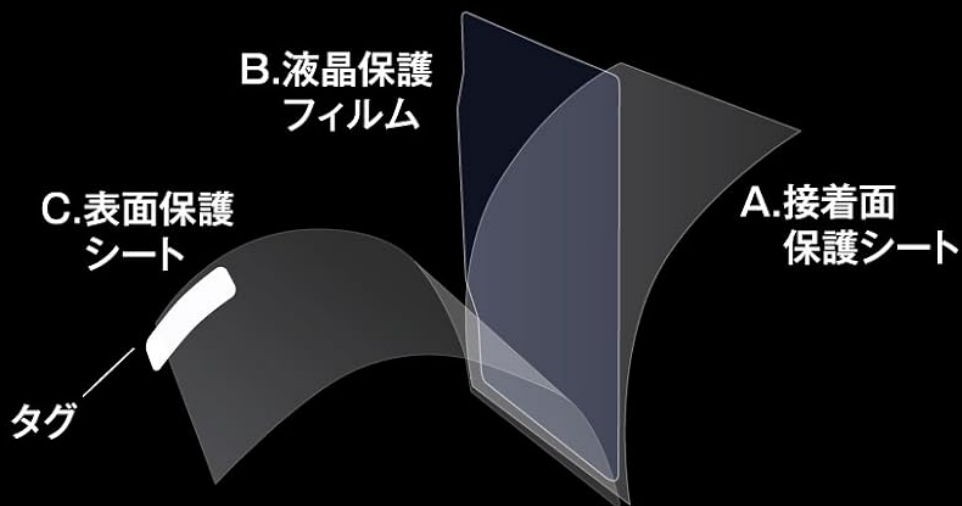

①液晶画面をきれいにする

同梱のクリーニングクロスで、表面に付着しているほこりや皮脂油などを丁寧に拭きとってください。

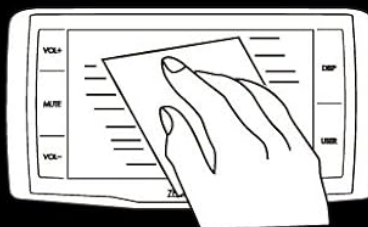

②接着面の保護シートをはがして液晶画面に貼る

貼り位置を決め、A.接着面保護シートをはがしてください。
ゆっくりと空気が入らないように貼ります。気泡が入った場合は、外に押し出してください。
※接着面を触らないようにご注意ください。



③表面保護シートをはがす

貼り付け終わったら、タグのついたC.表面保護シートをはがしてください。

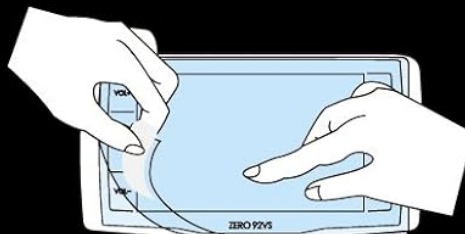


Image 3: Visual guide illustrating the three steps for applying the LCD protective film.

5. MAINTENANCE

To maintain the clarity and effectiveness of your Pure Crystal Film:

- Gently wipe the film with a soft, lint-free cloth to remove dust or smudges.
- For stubborn stains, lightly dampen the cloth with water. Avoid harsh chemicals or abrasive materials.
- Do not use excessive force when cleaning, as this may damage the film or the device.

6. TROUBLESHOOTING

If you encounter issues during or after application:

- **Air Bubbles:** If air bubbles are present after application, gently push them towards the nearest edge using a soft cloth or a plastic card (like a credit card) wrapped in a cloth. The film's special silicone layer allows for easy re-application, so you can carefully lift a corner and re-apply if necessary.
- **Dust Particles:** If dust is trapped under the film, carefully lift the nearest corner of the film and use a piece of tape to gently dab and remove the dust particle from both the screen and the film's adhesive side. Then, re-apply the film.
- **Film Not Adhering:** Ensure the screen is completely clean and free of oil or moisture. If the film still does not adhere properly, it may be damaged or the screen may have an uneven surface.

7. SPECIFICATIONS

Specification	Detail
Manufacturer	Comtec
Brand	Comtec
Product Model Number	CPF92VS
Compatible Devices	Comtec ZERO 92VS, FX-07 Radar Detectors
Display Type	LCD
Item Weight	38 g
Package Dimensions	15.5 x 8.6 x 0.5 cm
Country of Origin	Japan
First Available Date on Amazon.co.jp	2013/07/01

8. WARRANTY AND SUPPORT

For warranty information or technical support regarding your Comtec Pure Crystal Film CPF92VS, please refer to the official Comtec website or contact their customer service directly. Specific warranty details are not provided in this manual.

