

Patlite BM-202H

Patlite BM-202H Signal Phone Instruction Manual

1. INTRODUCTION

This manual provides essential information for the safe and effective installation, operation, and maintenance of the Patlite BM-202H Signal Phone. Please read this manual thoroughly before using the product and retain it for future reference.

2. SAFETY INFORMATION

Always observe the following safety precautions to prevent injury to personnel and damage to the product or other equipment.

- Ensure that installation and wiring are performed by qualified personnel only.
- Disconnect all power sources before performing any installation, wiring, or maintenance work.
- Verify that the power supply voltage matches the product's specifications (24V AC/DC).
- Do not expose the product to excessive moisture, dust, or extreme temperatures.
- Do not attempt to modify or disassemble the product. Refer all servicing to authorized personnel.

3. PRODUCT OVERVIEW

The Patlite BM-202H is a compact signal phone designed for industrial applications, providing audio signaling capabilities. It operates on a 24V AC/DC power supply and consumes 0.4W.

3.1. Components

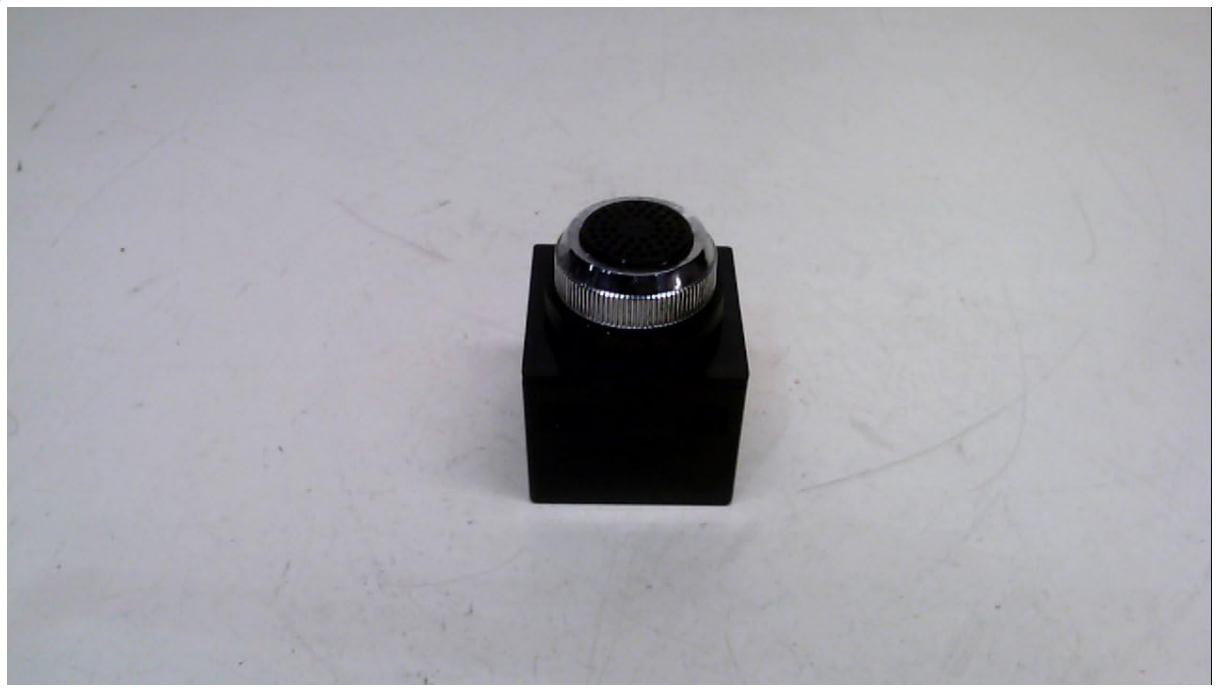


Figure 1: Front View of Patlite BM-202H Signal Phone. This image displays the compact, black cubic housing of the signal phone with a prominent circular speaker grille on the front face, surrounded by a silver, ribbed bezel.



Figure 2: Close-up of Speaker Grille. A detailed view of the signal phone's speaker grille, showing its textured surface and the metallic, finely ribbed bezel that secures it to the device housing.



Figure 3: Side View with Product Label. This image shows the side of the Patlite BM-202H, featuring a label that clearly indicates the model number (BM-202H), voltage (24V AC/DC), wattage (0.4W), and connection terminals (CH1, CH2, COM). The label also states 'PATLITE Corporation MADE IN JAPAN'.

4. SETUP AND INSTALLATION

4.1. Before Installation

- Unpack the BM-202H and inspect it for any visible damage.
- Ensure all necessary tools and wiring materials are available.
- Confirm the installation environment is suitable (e.g., away from excessive heat, moisture, or vibration).

4.2. Wiring

The BM-202H requires a 24V AC/DC power supply and features connection terminals labeled CH1, CH2, and COM. These terminals are typically used for signal input and common ground connections.

1. Ensure the power supply is disconnected before beginning any wiring.
2. Connect the 24V AC or DC power supply to the appropriate power input terminals (refer to the product label for exact polarity if DC).
3. Connect the common (COM) terminal to the system's common ground.
4. Connect signal input lines to CH1 and CH2 as required by your application. These channels typically trigger different audio signals or functions.
5. Secure all wiring connections to prevent accidental disconnection.
6. Once wiring is complete, carefully restore power and test the unit's functionality.

5. OPERATING INSTRUCTIONS

The Patlite BM-202H Signal Phone is designed for straightforward operation, primarily functioning as an audio output device triggered by external signals.

- **Power On:** Once correctly wired and power is supplied, the unit is ready for operation.
- **Signal Input:** The unit will emit an audible signal when a trigger is received on its CH1 or CH2 input terminals. The specific audio pattern or message may vary based on the signal input configuration.
- **Audio Output:** Sound is emitted from the front speaker grille. Ensure the grille is not obstructed for optimal sound clarity.
- **Volume Adjustment:** If applicable, adjust the volume using any integrated controls. (Note: Specific volume controls are not detailed in product specifications; assume fixed volume unless otherwise indicated by the manufacturer).

6. MAINTENANCE

Regular maintenance helps ensure the longevity and reliable performance of your Patlite BM-202H Signal Phone.

- **Cleaning:** Gently wipe the exterior of the unit with a soft, dry cloth. Do not use abrasive cleaners, solvents, or excessive moisture.
- **Inspection:** Periodically inspect the wiring connections for any signs of wear, corrosion, or looseness. Ensure the unit is securely mounted.
- **Environmental Check:** Verify that the operating environment remains within specified conditions (temperature, humidity, dust levels).
- **Speaker Grille:** Ensure the speaker grille is free from dust and debris to maintain clear audio output.

7. TROUBLESHOOTING

If you encounter issues with your BM-202H, refer to the following table for common problems and solutions.

Problem	Possible Cause	Solution
No audio output	No power supply; Incorrect wiring; No signal input; Damaged unit.	Check power connections and voltage; Verify wiring to CH1/CH2/COM; Confirm signal source is active; Contact support if unit is damaged.
Distorted or low audio	Obstructed speaker grille; Incorrect signal level; Unit malfunction.	Clear any obstructions from the grille; Verify signal input levels; Contact support.
Unit does not respond to signal	Incorrect signal wiring; Signal source issue; Unit malfunction.	Check CH1/CH2 wiring; Test signal source; Contact support.

8. SPECIFICATIONS






- **Model:** BM-202H
- **Brand:** Patlite
- **Voltage:** 24V AC/DC
- **Wattage:** 0.4W
- **Product Dimensions (L x W x H):** 0.31 x 0.31 x 0.24 inches (0.79 x 0.79 x 0.61 cm)


- **Item Weight:** 1.67 pounds (0.76 kg)
- **Material:** Copper (internal components)
- **Manufacturer:** PATLITE

9. WARRANTY AND SUPPORT

For warranty information, technical support, or service inquiries, please contact your authorized Patlite distributor or visit the official Patlite website. Keep your purchase receipt as proof of purchase.

Related Documents - BM-202H


	<p>PATLITE NHB Series Network Signal Tower Installation Manual</p> <p>Comprehensive installation manual for the PATLITE NHB Series Network Signal Tower. Covers model configuration, names, dimensions, mounting methods, wiring, power connection, operation, and troubleshooting for industrial and commercial applications.</p>
	<p>PATLITE RT-100VFUL-R Instruction Manual: Voice Synthesized and Rotating Light</p> <p>Comprehensive instruction manual for the PATLITE RT-100VFUL-R, detailing installation, wiring, operation, specifications, maintenance, and troubleshooting for this voice synthesized and rotating light system.</p>
	<p>PATLITE RF-001 Technical Specifications and Installation Guide</p> <p>Detailed technical specifications, dimensions, and step-by-step installation instructions for the PATLITE RF-001 industrial signal light. Covers product features, operating conditions, mounting procedures, and parts list.</p>
	<p>PATLITE RFV Series LED Signal Tower User's Manual</p> <p>User's manual for the PATLITE RFV Series LED Signal Tower, detailing specifications, installation, troubleshooting, and safety guidelines. Includes product dimensions and model-specific information.</p>
	<p>EKA Electronic Black Mask Ovens Operating and Instruction Manual</p> <p>Comprehensive operating and instruction manual for EKA Electronic Black Mask Ovens, including models MKF 464 BM to MKF 2011 BM. This guide covers installation, safety, operation, cooking functions, recipe management, cleaning, troubleshooting, and warranty information for professional kitchen use.</p>

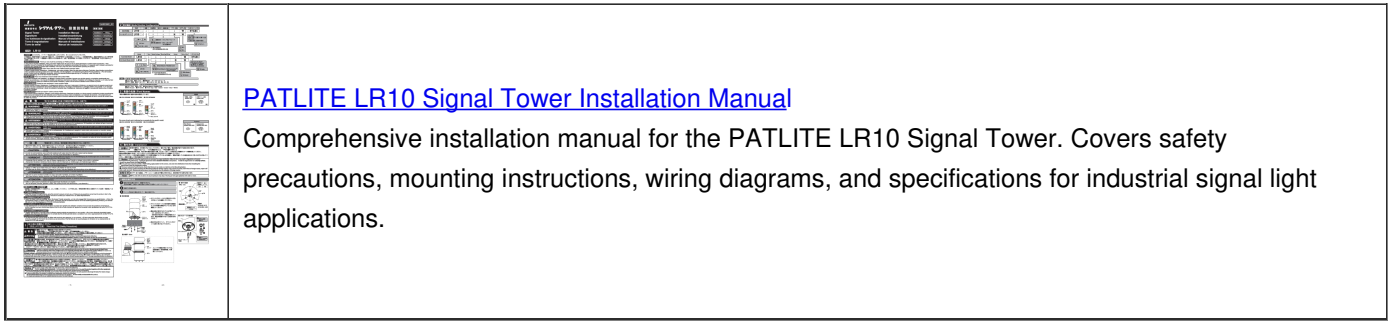

[PATLITE LR10 Signal Tower Installation Manual](#)


Comprehensive installation manual for the PATLITE LR10 Signal Tower. Covers safety precautions, mounting instructions, wiring diagrams, and specifications for industrial signal light applications.

Documents - Patlite – BM-202H

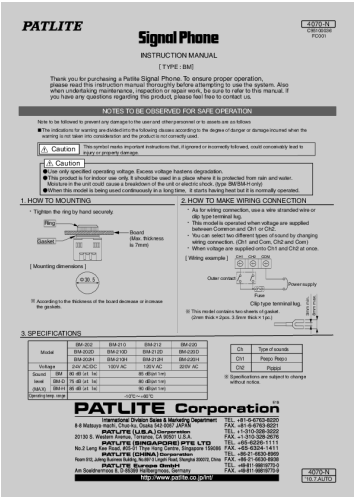


[\[pdf\] User Manual Instructions Datasheet](#)

FC001 27 216 346\$4070N BM ai PCC0294 Caution INSTRUCTION MANUAL Thank you for purchasing a Patlite Signal Phone To ensure proper operation please read this instruction manual thoroughly before attempting to use the 1766042 farnell datasheets
4070-N C95100036 FC001 INSTRUCTION MANUAL = TYPE : BM Thank you for purchasing a Patlite Signal Ph ... two sheets of gasket. 2mm thick2pcs. 3.5mm thick1pc. 3. SPECIFICATIONS BM-202 Model BM-202D **BM-202H** Voltage 24V AC/DC Sound BM 80 dB CVO level BM-D 75 dB CVO MAX BM-H 85 dB CVO Operati...
lang:en **score:46** filesize: 152.44 K page_count: 1 document date: 2013-10-31

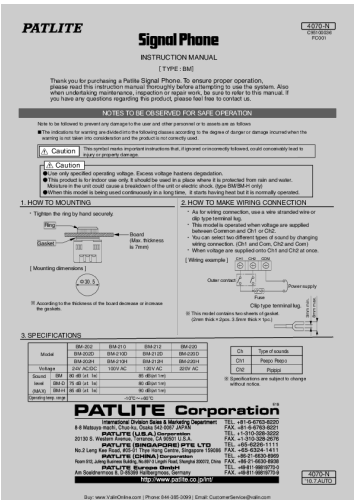

[\[pdf\] User Manual Instructions](#)

BM Series Signal Horn Installation Manual operation instruction manual Patlite Valin Phone 4070 N manuallib 2023 10 16 |||
4070-N C95100036 FC001 INSTRUCTION MANUAL = TYPE : BM Thank you for purchasing a Patlite Signal Ph ... two sheets of gasket. 2mm thick2pcs. 3.5mm thick1pc. 3. SPECIFICATIONS BM-202 Model BM-202D **BM-202H** Voltage 24V AC/DC Sound BM 80 dB CVO level BM-D 75 dB CVO MAX BM-H 85 dB CVO Operati...
lang:en **score:45** filesize: 176.77 K page_count: 1 document date: 2017-05-18

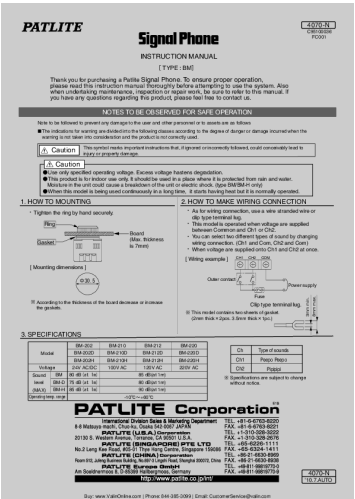

[\[pdf\] User Manual Instructions](#)

BM Series Signal Horn Installation Manual operation instruction manual Patlite Valin BigCommercelt should be used in a place where it is protected from rain and water Moisture the unit could cause breakdown of or electric shock type BM 202 FC001 Valinpatlite bm manualpatlite manualcdn11 bigcommerce s ca10qrhzok content documents patlite |||
4070-N C95100036 FC001 INSTRUCTION MANUAL = TYPE : BM Thank you for purchasing a Patlite Signal Ph ... two sheets of gasket. 2mm thick2pcs. 3.5mm thick1pc. 3. SPECIFICATIONS BM-202 Model BM-202D **BM-202H** Voltage 24V AC/DC Sound BM 80 dB CVO level BM-D 75 dB CVO MAX BM-H 85 dB CVO Operati...
lang:en **score:41** filesize: 136.77 K page_count: 1 document date: 2017-05-18

1-800-633-0405
PATLITE. Audible Signal Overview

Audible Signal Devices

Patlite offers a wide range of audible signal devices for either installation panel or surface mount applications with a variety of audible signal configurations. All audible devices are UL certified and digital audio tones with the ability to be heard over background noise at 150 feet.

- 150 ft. Audible Signal Horn
- Response (horned) typically 90° or 180° or 360° as noted
- Sound pressure level (continuous) ratings (other models as noted)
- Wide range of digital tones for installation
- Optional 90 volt can be used for field configurations
- Variety of models for both AC and DC applications
- Response time as per the connection

Audible Accessories

Accessories for Patlite audible signal devices

- Mounting plate
- 24V ac/dc 10 amp with 10 amp



www.automationdirect.com Patlite Devices IPL-301

[\[pdf\]](#) Specifications Accessories

Patlite Bracket Horns and Buzzer Pilot Devices AutomationDirect patliteaudible 2023 10 11 09 37 cdn

automationdirect static archive specs |||

1-800-633-0405 For the latest prices, please check AutomationDirect.com. Audible Signal Overview A ... 90dB volume Meets IP30 standards Designed to operate in temperatures from -10 to 60C 14 to 140F **BM-202H** BM Series Buzzer Specifications Part Number Price Drawing Link Description Rated Voltage O...

lang:en score:23 filesize: 1.39 M page_count: 5 document date: 2023-10-11

1-800-633-0405
PATLITE. Audible Signal Overview

Audible Signal Devices

Patlite offers a wide range of audible signal devices for either installation panel or surface mount applications with a variety of audible signal configurations. All audible devices are UL certified and digital audio tones with the ability to be heard over background noise at 150 feet.

- 150 ft. Audible Signal Horn
- Response (horned) typically 90° or 180° or 360° as noted
- Sound pressure level (continuous) ratings (other models as noted)
- Wide range of digital tones for installation
- Optional 90 volt can be used for field configurations
- Variety of models for both AC and DC applications
- Response time as per the connection

Audible Accessories

Accessories for Patlite audible signal devices

- Mounting plate
- 24V ac/dc 10 amp with 10 amp



www.automationdirect.com Patlite Devices IPL-301

[\[pdf\]](#) Specifications Accessories

Patlite Bracket Horns and Buzzer Pilot Devices AutomationDirect patliteaudible 2024 06 11 02 07 cdn

automationdirect static archive specs |||

1-800-633-0405 For the latest prices, please check AutomationDirect.com. Audible Signal Overview A ... 90dB volume Meets IP30 standards Designed to operate in temperatures from -10 to 60C 14 to 140F **BM-202H** BM Series Buzzer Specifications Part Number Price Drawing Link Description Rated Voltage O...

lang:en score:23 filesize: 1.39 M page_count: 5 document date: 2024-06-11

1-800-633-0405
PATLITE. Audible Signal Overview

Audible Signal Devices

Patlite offers a wide range of audible signal devices for either installation panel or surface mount applications with a variety of audible signal configurations. All audible devices are UL certified and digital audio tones with the ability to be heard over background noise at 150 feet.

- 150 ft. Audible Signal Horn
- Response (horned) typically 90° or 180° or 360° as noted
- Sound pressure level (continuous) ratings (other models as noted)
- Wide range of digital tones for installation
- Optional 90 volt can be used for field configurations
- Variety of models for both AC and DC applications
- Response time as per the connection

Audible Accessories

Accessories for Patlite audible signal devices

- Mounting plate
- 24V ac/dc 10 amp with 10 amp



www.automationdirect.com Patlite Devices IPL-327

[\[pdf\]](#) Specifications Accessories

Patlite Bracket Horns and Buzzer Pilot Devices AutomationDirect patliteaudible 2024 04 11 03 47 cdn

automationdirect static archive specs |||

1-800-633-0405 For the latest prices, please check AutomationDirect.com. Audible Signal Overview A ... 90dB volume Meets IP30 standards Designed to operate in temperatures from -10 to 60C 14 to 140F **BM-202H** BM Series Buzzer Specifications Part Number Price Drawing Link Description Rated Voltage O...

lang:en score:23 filesize: 703.31 K page_count: 5 document date: 2024-04-11



[\[pdf\]](#) Specifications Accessories

Patlite Bracket Horns and Buzzer Pilot Devices AutomationDirect patliteaudible 2023 10 24 04 19 12 cdn automationdirect static archive specs |||

1-800-633-0405 For the latest prices, please check AutomationDirect.com. Audible Signal Overview A ... 90dB volume Meets IP30 standards Designed to operate in temperatures from -10 to 60C 14 to 140F **BM-202H** BM Series Buzzer Specifications Part Number Price Drawing Link Description Rated Voltage O...

lang:en score:23 filesize: 1.39 M page_count: 5 document date: 2023-10-24



[\[pdf\]](#) Specifications Accessories

Patlite Bracket Horns and Buzzer Pilot Devices AutomationDirect patliteaudible 2023 06 21 04 25 17 cdn automationdirect static archive specs |||

1-800-633-0405 For the latest prices, please check AutomationDirect.com. Audio Signaling Overview ... 90dB volume Meets IP30 standards Designed to operate in temperatures from -10 to 60C 14 to 140F **BM-202H** BM Series Buzzer Specifications Part Number Price Drawing Link Description Rated Voltage O...

lang:en score:23 filesize: 1.39 M page_count: 5 document date: 2023-06-21



[\[pdf\]](#) Specifications Accessories

Patlite Bracket Horns and Buzzer Pilot Devices AutomationDirect patliteaudible 2024 02 23 12 27 55 cdn automationdirect static archive specs |||

1-800-633-0405 For the latest prices, please check AutomationDirect.com. Audible Signal Overview A ... 90dB volume Meets IP30 standards Designed to operate in temperatures from -10 to 60C 14 to 140F **BM-202H** BM Series Buzzer Specifications Part Number Price Drawing Link Description Rated Voltage O...

lang:en score:23 filesize: 1.39 M page_count: 5 document date: 2024-02-23

[illegible]

[\[pdf\]](#) Specifications Accessories

Patlite Bracket Horns and Buzzer Pilot Devices AutomationDirect patliteaudible 2023 11 27 05 02 10 cdn
automationdirect static archive specs |||

1-800-633-0405 For the latest prices, please check AutomationDirect.com. Audible
Signal Overview A ... 90dB volume Meets IP30 standards Designed to operate in
temperatures from -10 to 60C 14 to 140F **BM-202H** BM Series Buzzer Specifications
Part Number Price Drawing Link Description Rated Voltage O...

lang:en score:23 filesize: 1.39 M page_count: 5 document date: 2023-11-27

[illegible]

[\[pdf\]](#) Specifications Accessories

Patlite Bracket Horns and Buzzer Pilot Devices AutomationDirect patliteaudible 2024 04 15 09 29 20 cdn
automationdirect static archive specs |||

1-800-633-0405 For the latest prices, please check AutomationDirect.com. Audible
Signal Overview A ... 90dB volume Meets IP30 standards Designed to operate in
temperatures from -10 to 60C 14 to 140F **BM-202H** BM Series Buzzer Specifications
Part Number Price Drawing Link Description Rated Voltage O...

lang:en score:23 filesize: 1.39 M page_count: 5 document date: 2024-04-15

[illegible]

[\[pdf\]](#) Specifications Accessories

Patlite Bracket Horns and Buzzer Pilot Devices AutomationDirect patliteaudible 2024 02 29 12 47 36 cdn
automationdirect static archive specs |||

1-800-633-0405 For the latest prices, please check AutomationDirect.com. Audible
Signal Overview A ... 90dB volume Meets IP30 standards Designed to operate in
temperatures from -10 to 60C 14 to 140F **BM-202H** BM Series Buzzer Specifications
Part Number Price Drawing Link Description Rated Voltage O...

lang:en score:23 filesize: 1.39 M page_count: 5 document date: 2024-02-29

[illegible]

[\[pdf\]](#) Specifications Accessories

Patlite Bracket Horns and Buzzer Pilot Devices AutomationDirect patliteaudible 2024 02 20 01 09 53 cdn
automationdirect static archive specs |||

1-800-633-0405 For the latest prices, please check AutomationDirect.com. Audible
Signal Overview A ... 90dB volume Meets IP30 standards Designed to operate in
temperatures from -10 to 60C 14 to 140F **BM-202H** BM Series Buzzer Specifications
Part Number Price Drawing Link Description Rated Voltage O...

lang:en score:23 filesize: 1.39 M page count: 5 document date: 2024-02-20



[\[pdf\]](#) Specifications Accessories

Patlite Bracket Horns and Buzzer Pilot Devices AutomationDirect patliteaudible 2024 02 22 01 57 20 cdn automationdirect static archive specs |||

1-800-633-0405 For the latest prices, please check AutomationDirect.com. Audible Signal Overview A ... 90dB volume Meets IP30 standards Designed to operate in temperatures from -10 to 60C 14 to 140F **BM-202H** BM Series Buzzer Specifications Part Number Price Drawing Link Description Rated Voltage O... lang:en score:23 filesize: 1.39 M page_count: 5 document date: 2024-02-22



[\[pdf\]](#) Specifications Accessories

Patlite Bracket Horns and Buzzer Pilot Devices AutomationDirect patliteaudible 2024 01 11 03 53 05 cdn automationdirect static archive specs |||

1-800-633-0405 For the latest prices, please check AutomationDirect.com. Audible Signal Overview A ... 90dB volume Meets IP30 standards Designed to operate in temperatures from -10 to 60C 14 to 140F **BM-202H** BM Series Buzzer Specifications Part Number Price Drawing Link Description Rated Voltage O... lang:en score:23 filesize: 1.39 M page_count: 5 document date: 2024-01-11



[\[pdf\]](#) Specifications Accessories

Patlite Bracket Horns and Buzzer Pilot Devices AutomationDirect patliteaudible 2024 01 08 03 44 53 cdn automationdirect static archive specs |||

1-800-633-0405 For the latest prices, please check AutomationDirect.com. Audible Signal Overview A ... 90dB volume Meets IP30 standards Designed to operate in temperatures from -10 to 60C 14 to 140F **BM-202H** BM Series Buzzer Specifications Part Number Price Drawing Link Description Rated Voltage O... lang:en score:23 filesize: 1.39 M page_count: 5 document date: 2024-01-08



[\[pdf\]](#) Specifications Accessories

Patlite Bracket Horns and Buzzer Pilot Devices AutomationDirect patliteaudible 2024 01 11 02 36 30 cdn automationdirect static archive specs |||

1-800-633-0405 For the latest prices, please check AutomationDirect.com. Audible Signal Overview A ... 90dB volume Meets IP30 standards Designed to operate in temperatures from -10 to 60C 14 to 140F **BM-202H** BM Series Buzzer Specifications Part Number Price Drawing Link Description Rated Voltage O...

lang:en score:23 filesize: 1.39 M page_count: 5 document date: 2024-01-11



[\[pdf\]](#) Specifications Accessories

Patlite Bracket Horns and Buzzer Pilot Devices AutomationDirect patliteaudible 2024 01 11 03 38 47 cdn automationdirect static archive specs |||

1-800-633-0405 For the latest prices, please check AutomationDirect.com. Audible Signal Overview A ... 90dB volume Meets IP30 standards Designed to operate in temperatures from -10 to 60C 14 to 140F **BM-202H** BM Series Buzzer Specifications Part Number Price Drawing Link Description Rated Voltage O...

lang:en score:23 filesize: 1.39 M page_count: 5 document date: 2024-01-11



[\[pdf\]](#) Specifications Accessories

Patlite Bracket Horns and Buzzer Pilot Devices AutomationDirect patliteaudible 2023 09 21 04 03 36 cdn automationdirect static archive specs |||

1-800-633-0405 For the latest prices, please check AutomationDirect.com. Audible Signal Overview A ... 90dB volume Meets IP30 standards Designed to operate in temperatures from -10 to 60C 14 to 140F **BM-202H** BM Series Buzzer Specifications Part Number Price Drawing Link Description Rated Voltage O...

lang:en score:23 filesize: 1.39 M page_count: 5 document date: 2023-09-21




[\[pdf\]](#) Specifications Accessories

Patlite Bracket Horns and Buzzer Pilot Devices AutomationDirect patliteaudible 2024 04 25 01 51 47 cdn automationdirect static archive specs |||

1-800-633-0405 For the latest prices, please check AutomationDirect.com. Audible Signal Overview A ... 90dB volume Meets IP30 standards Designed to operate in temperatures from -10 to 60C 14 to 140F **BM-202H** BM Series Buzzer Specifications Part Number Price Drawing Link Description Rated Voltage O...

lang:en score:23 filesize: 1.39 M page_count: 5 document date: 2024-04-25

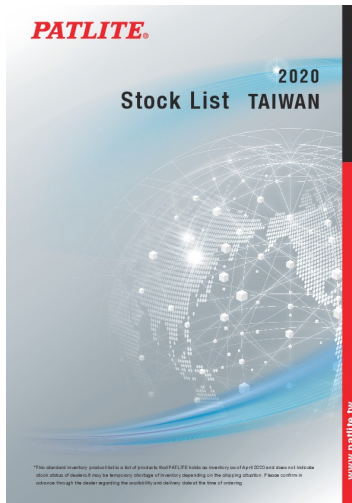

[\[pdf\]](#)

2020 Stock List TAIWAN PATLITE 01 R red amber green B blue C clear 02 Signal Tower Series Part No Rated Voltage Tiers Color Functions 1 2 Mount Wiring LR4 Φ40 302LJBW RYG 24V DC 3 Y G Continuous Flash Buzzer NPN PNP Pole with L bracket Cable Stocklist TW patlite tw include images index |||

2020 Stock List TAIWAN *This standard inventory product list is a list of products that PATLITE hold ... 4 BD-24AA-K 12-24V DC 90 4 BK BK-24A-J 12-24V DC 95 8 32 BM-202 24V AC / DC 80 2 BM **BM-202H** 24V AC / DC 85 2 BSV-24N-D 12-24V DC 87 4 15 BSV BSV-24N-W 12-24V DC 87 4 15 ...

lang:de **score:22** filesize: 1.55 M page_count: 3 document date: 2020-05-25



[\[pdf\]](#)

0 AH12 US Stock List O patlite include images index |||

Stock List U.S.A. 2019 This standard inventory product list is a list of products that PATLITE holds ... BD-24AE-J 12-24V DC 85 BD 80 BD-24AE-K 12-24V DC 90 Channel Inputs Bit Binary 4 4 30 BM **BM-202H** 24V AC/DC 85 2 75 O -white BSV EHS 166.5112 EHV FV BSV-24P-W 12-24V DC 87 EHS-M...

lang:de **score:20** filesize: 4.14 M page_count: 8 document date: 2019-03-08




[\[pdf\]](#)

0 AH12 CN Stock List patlite cn lr6 302wjnw r y gryg 302wjnu ryg 302wjbw 302wjbu 302pjinw 302pjbw 302ljinw 302ljbw 202wjbu rg 202ljinw rr O include images index |||

Stock List CHINA 2019 This standard inventory product list is a list of products that PATLITE holds ... 5dB 4 4 4 4 8 32 03 1 NPN NPN NPN PNP NPN NPN 2 30 BM BM-202 BM-202D **BM-202H** BM-220 75 BSV BSV-24N-W 24V AC / DC 24V AC / DC 24V AC / DC 220V AC 12-24V DC W166.5 H1...


lang:en **score:19** filesize: 3.77 M page_count: 8 document date: 2019-03-08

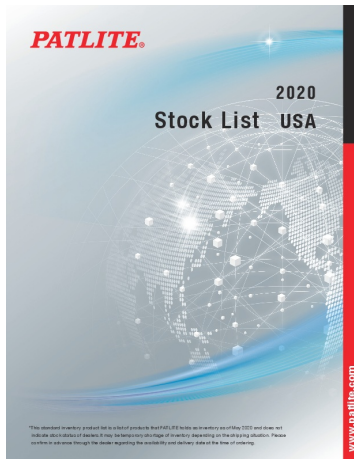

[\[pdf\]](#)

2020 Stocklist US Letter patlite include images index Stock List USA PATLITE *This standard inventory product list is a of products that holds as May and does not indicate stock status dealers It may be temporary shortage depending on the shipping situation |||

2020 Stock List USA *This standard inventory product list is a list of products that PATLITE holds a ... :clear Audible Alarms Annunciators Series BD 80 BK 120 BM 30 BSV 75 Part No BD-24AE-J BK-24E-J **BM-202H** FC001 BSV-24P-D BSV-24P-W Rated Voltage 12-24V DC 12-24V DC 24V AC/DC 12-24V DC 12-24V DC ...
lang:de score:18 filesize: 1.89 M page_count: 7 document date: 2020-05-21

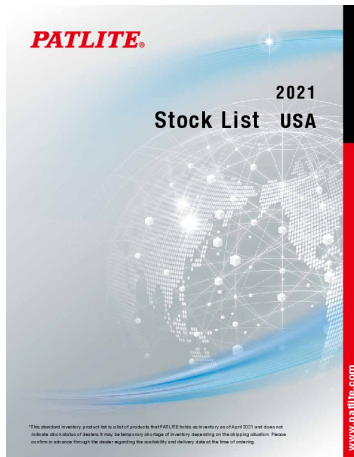

[\[pdf\]](#)

2021 Stocklist letter patlite include images index


2021 Stock List USA *This standard inventory product list is a list of products that PATLITE holds a ... dible Alarms Annunciators Series BD 80 BK 120 BM 30 BSV 75 Part No BD-24AE-J BD-24AE-K BK-24E-J **BM-202H** FC001 BSV-24P-D BSV-24P-S BSV-24P-W Rated Voltage 12-24V DC 12-24V DC 12-24V DC 24V AC/DC 1...
lang:de score:18 filesize: 615.09 K page_count: 0 document date: 0000-00-00



[\[pdf\]](#) Specifications Accessories

Werma Bracket Horns and Buzzer Pilot Devices AutomationDirect patliteaudible cdn automationdirect static specs


1-800-633-0405 For the latest prices, please check AutomationDirect.com. Audio Signaling Overview ... B volume Meets IP30 standards Designed to operate in temperatures from -10 to 60C 14 to 140F **BM-202H** BM Series Buzzer Specifications Part Number Price Drawing Link Description Rated Voltage O...
lang:en score:18 filesize: 1.37 M page_count: 5 document date: 2021-08-11

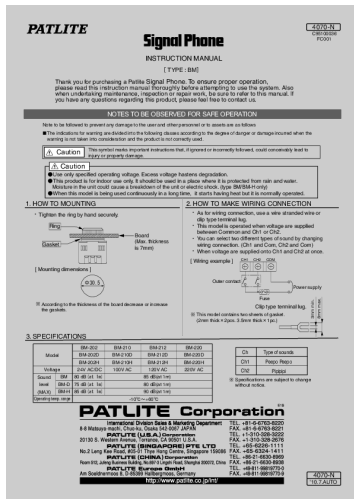

[pdf] User Manual Instructions

FC001 27 216 346\$4070N BM ai PCC0294 4297f63fe1a4f9abd67db8b2aae1d2a3 alliedelec m d ||| 4070-N C95100036 FC001 INSTRUCTION MANUAL = TYPE : BM Thank you for purchasing a Patlite Signal Ph ... two sheets of gasket. 2mm thick2pcs. 3.5mm thick1pc. 3. SPECIFICATIONS BM-202 Model BM-202D **BM-202H** Voltage 24V AC/DC Sound BM 80 dB CVO level BM-D 75 dB CVO MAX BM-H 85 dB CVO Operati...


lang:en score:17 filesize: 157.79 K page_count: 1 document date: 2011-04-04

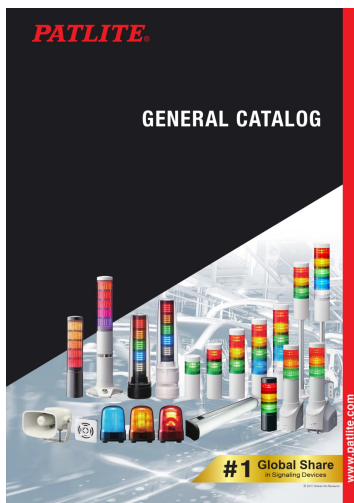

[pdf] Documentation Borchure Catalog

O BA03 en patlite support Catálogos folletos Catalogs Brochures Kit de HSST para la señalización controlada manualmente 3M2 PATLITE PATLITE for Manually Controlled Signaling es ap Kataloge Broschüren Set für manuell gesteuerte Signalisierung eu SKH EA 100mm Rotating Products Revolving Warning Light PATLITE Documentation language 15 44 MB General Catalog PATLITE Industrial Signalling Devices TME Electronic components DownloadPATLITE FV 127JP MP3 File Playback Circuit Board Voice SynthesizerPATLITE GENERAL EN tme Document 3942f3103d1fcd6c14ff8ea5aa4e1c7 webcatalog file co th ||| GENERAL CATALOG # 1 Global Share in Signaling Devices 2017, Global Info Research www.patlite.com ... otation-stop is not required, drill a 30.5.mm hole. Product List Model Number BM-202 BM-210 BM-220 **BM-202H** BM-210H BM-220H BM-202D BM-210D BM-220D Rated Voltage 24V AC/DC 100V AC 220V AC 24V AC/DC 1...

lang:en score:16 filesize: 15.44 M page_count: 0 document date: 0000-00-00

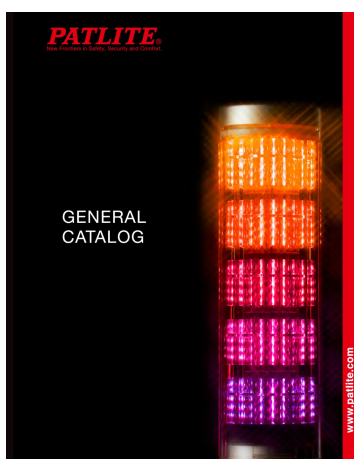


[pdf]

general patlite support

1 New Frontiers in Safety, Security and Comfort is PATLITE s mission. PATLITE offers state-of-the-art equipment for process and industrial automation for over 60 years. Our Innovative and robust design, backed by a powerful commitment and years of knowledge, has made PATLITE the world s best k...

lang:en score:16 filesize: 26.4 M page_count: 206 document date: 2015-11-12

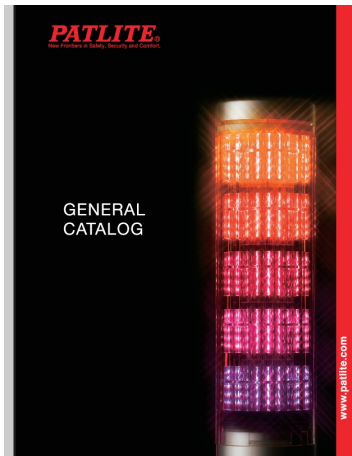


[\[pdf\]](#)

EngGenCat 20160314 patlite support

New Frontiers in Safety, Security and Comfort is PATLITE s mission. PATLITE offers state-of-the-art equipment for process and industrial automation for over 60 years. Our Innovative and robust design, backed by a powerful commitment and years of knowledge, has made PATLITE the world s best known...

lang:en score:16 filesize: 19.96 M page_count: 206 document date: 2016-03-15

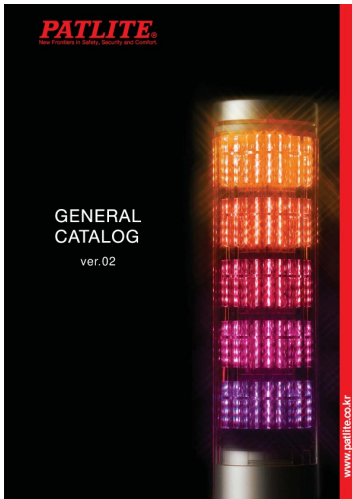

[\[pdf\]](#) Catalog

Catalog PLKR web jppcc0195 PATLITE 2015Cat patlite co kr support |||

ver.02 www.patlite.co.kr ##### ##### ###1# #####U G#####1 # ... 1 . Option EP#
Level BM-202 BM-210 BM-220 **BM-202H** BM-210H BM-220H AC/DC 24V AC 100V
AC 220V AC/DC 24V AC 100V AC 220V AC/DC 24V 10 AC 100V...


lang:i-klngon score:16 filesize: 30.46 M page_count: 278 document date: 2015-12-17



[PATLITE BM Series Signal Horn - Technical Specifications and Ordering Guide](#)

Detailed specifications, features, and ordering information for the PATLITE BM Series compact signal horn, designed for control panel and production equipment applications. Includes dimensions, wiring, and performance data.

lang:en score:16 filesize: 396.39 K page_count: 2 document date: 2017-05-09

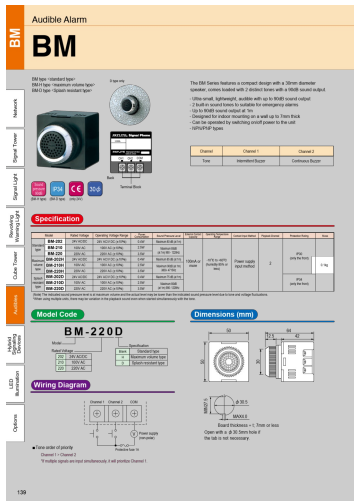


[pdf] Specifications Catalog

bm 202 fc001 cp pim galco Manufacturer Patlite TechDocument Catalog Page |||

BM Network Signal Tower Signal Light Revolving Warning Light Audible Alarm BM BM type standar ... at 1m 990 - 1228Hz Operating Temperature Range Contact Input Method Playback Channel Maximum **BM-202H** 24V AC/DC 24V AC/V DC 10 0.4W Maximum 85 dB at 1m 100mA or -10 to 60 Power supply v...

lang:en score:16 filesize: 706.49 K page_count: 1 document date: 2020-02-12

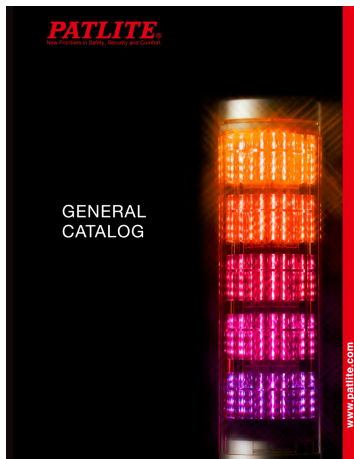

[pdf] Catalog

Untitled EnglishGeneralCatalog 20151113 patlite co kr support |||

New Frontiers in Safety, Security and Comfort is PATLITE s mission. PATLITE offers state-of-the-art equipment for process and industrial automation for over 60 years. Our Innovative and robust design, backed by a powerful commitment and years of knowledge, has made PATLITE the world s best know...

lang:en score:16 filesize: 27.87 M page_count: 206 document date: 2015-11-18




[pdf] Dimension Guide Catalog

BM Catalog En patlite 80 product index Command Index method Download id 3 idx 1

BM BM Signal Horn AC/DC 24V Only 90dB at 1m BM-H Type 2 Channels IP34 BM-D Front Only 30 NPN/PNP Open-collector Compact Signal Horn designed to integrate with control panel, switchboard and other production equipment applications. FEATURES Built-in Alarm with an audible sound of up to 90dB ...

lang:en score:16 filesize: 453.55 K page_count: 2 document date: 2016-02-12

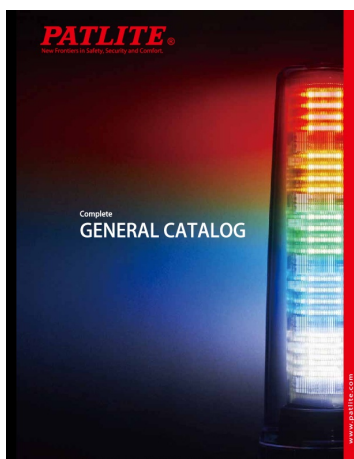


[pdf] Accessories Catalog

PATLITE Complete General Catalog jppcc0195 MAIN stevenengineering Tech Support

Courtesy of Steven Engineering, Inc. - 800 258-9200 - sales steveneng.com -

www.stevenengineering.com PATLITE is Number 1 for Signaling Technology. Combining innovative LED technology and advanced optical design, PATLITE s signaling products deliver the highest level of illumination and reliabi...

lang:en score:16 filesize: 14.03 M page_count: 211 document date: 2015-12-15

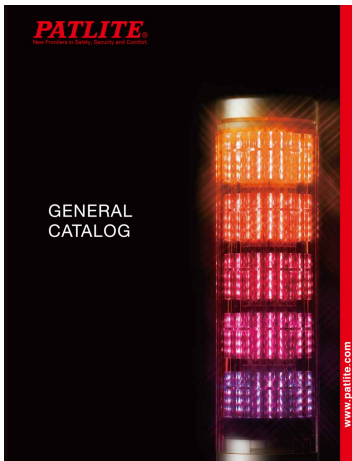


[\[pdf\]](#)

O 3209B EN patlite support PATLITE KC KN 61000 6 4 2 CE II 3GD Ex nA IIC T4 Gc tc IIIC T135oC Dc IP65 94 9 EC ATEX CENELEC 60079 0 15 31 |||

New Frontiers in Safety, Security and Comfort is PATLITE s mission. PATLITE offers state-of-the-art equipment for process and industrial automation for over 60 years. Our Innovative and robust design, backed by a powerful commitment and years of knowledge, has made PATLITE the world s best known...

lang:en **score:15** filesize: 25.87 M page_count: 206 document date: 2016-11-09

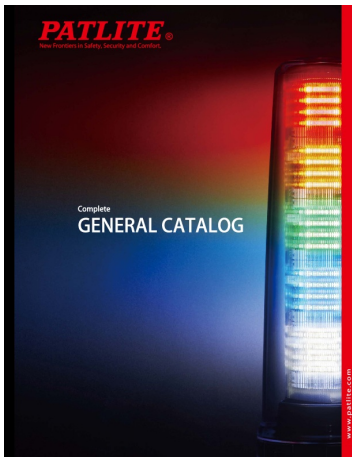

[\[pdf\]](#) Accessories Catalog

cover 0120c letter newadd pg1 ol ai jppcc0195 Full Catalog pd patlite portal documents |||

PATLITE is Number 1 for Signaling Technology. Combining innovative LED technology and advanced optical design, PATLITE s signaling products deliver the highest level of illumination and reliability with protection up to IP-69K. Featuring a broad selection of models, sizes, designs and optional acc...

lang:en **score:15** filesize: 15.63 M page_count: 211 document date: 2013-11-12