YUYI H-GOL1800

YUYI 71" Modern Crystal Chandelier User Manual

Model: H-GOL1800 | Brand: YUYI

Introduction

This manual provides comprehensive instructions for the safe installation, operation, and maintenance of your YUYI 71" Modern Crystal Chandelier. Please read all instructions carefully before beginning installation and retain this manual for future reference.

Safety Information

- **Professional Installation Recommended:** Due to the complexity and weight of this fixture (approximately 57.3 lbs), professional installation by a qualified electrician is highly recommended.
- **Power Disconnection:** Always disconnect power at the main circuit breaker before installation, cleaning, or servicing the fixture.
- **Voltage:** Ensure the power supply voltage is 110-120V, compatible with the chandelier.
- **Weight Capacity:** Verify that the ceiling junction box and mounting structure can safely support the fixture's weight.
- **Bulb Type:** Use only G9 bulbs (Max. 40W each). Dimmable bulbs require a compatible dimmer switch (not included).
- **Handling Crystals:** Handle K9 crystals with care to prevent breakage or scratches. Wearing gloves during crystal installation is recommended to avoid fingerprints.
- **Indoor Use Only:** This chandelier is designed for indoor use only and is not water-resistant.

Package Contents

Before beginning installation, ensure all parts listed below are present and undamaged. If any parts are missing or damaged, do not attempt to assemble or install the product. Contact customer service for assistance.

- Main Chandelier Body with Lamp Holders
- Decorative Tree Branches
- K9 Crystal Strings
- Mounting Hardware (Crossbar, Screws, Wire Nuts)
- Instruction Manual
- Gloves (recommended for handling crystals)

Your browser does not support the video tag.

Video: This official YUYI video provides an overview of the 71-inch Luxury Gold Crystal Chandelier, showcasing its design and components.

Specifications

Brand	YUYI
Model Number	H-GOL1800
Dimensions (L x W x H)	70.8"L x 25.5"W x 66"H (Adjustable cable 0-66")
Weight	Approx. 57.3 lbs
Material	Aluminum, K9 Crystal
Color	Gold
Voltage	110-120V
Number of Lights	20
Bulb Base	G9 (Max. 40W per bulb, bulbs not included)
Recommended Light Color	3000K Warm White
Dimmable	Yes, with dimmable bulbs and compatible dimmer switch (not included)
Mounting Type	Semi-Flush Mount (suitable for flat and sloped ceilings)

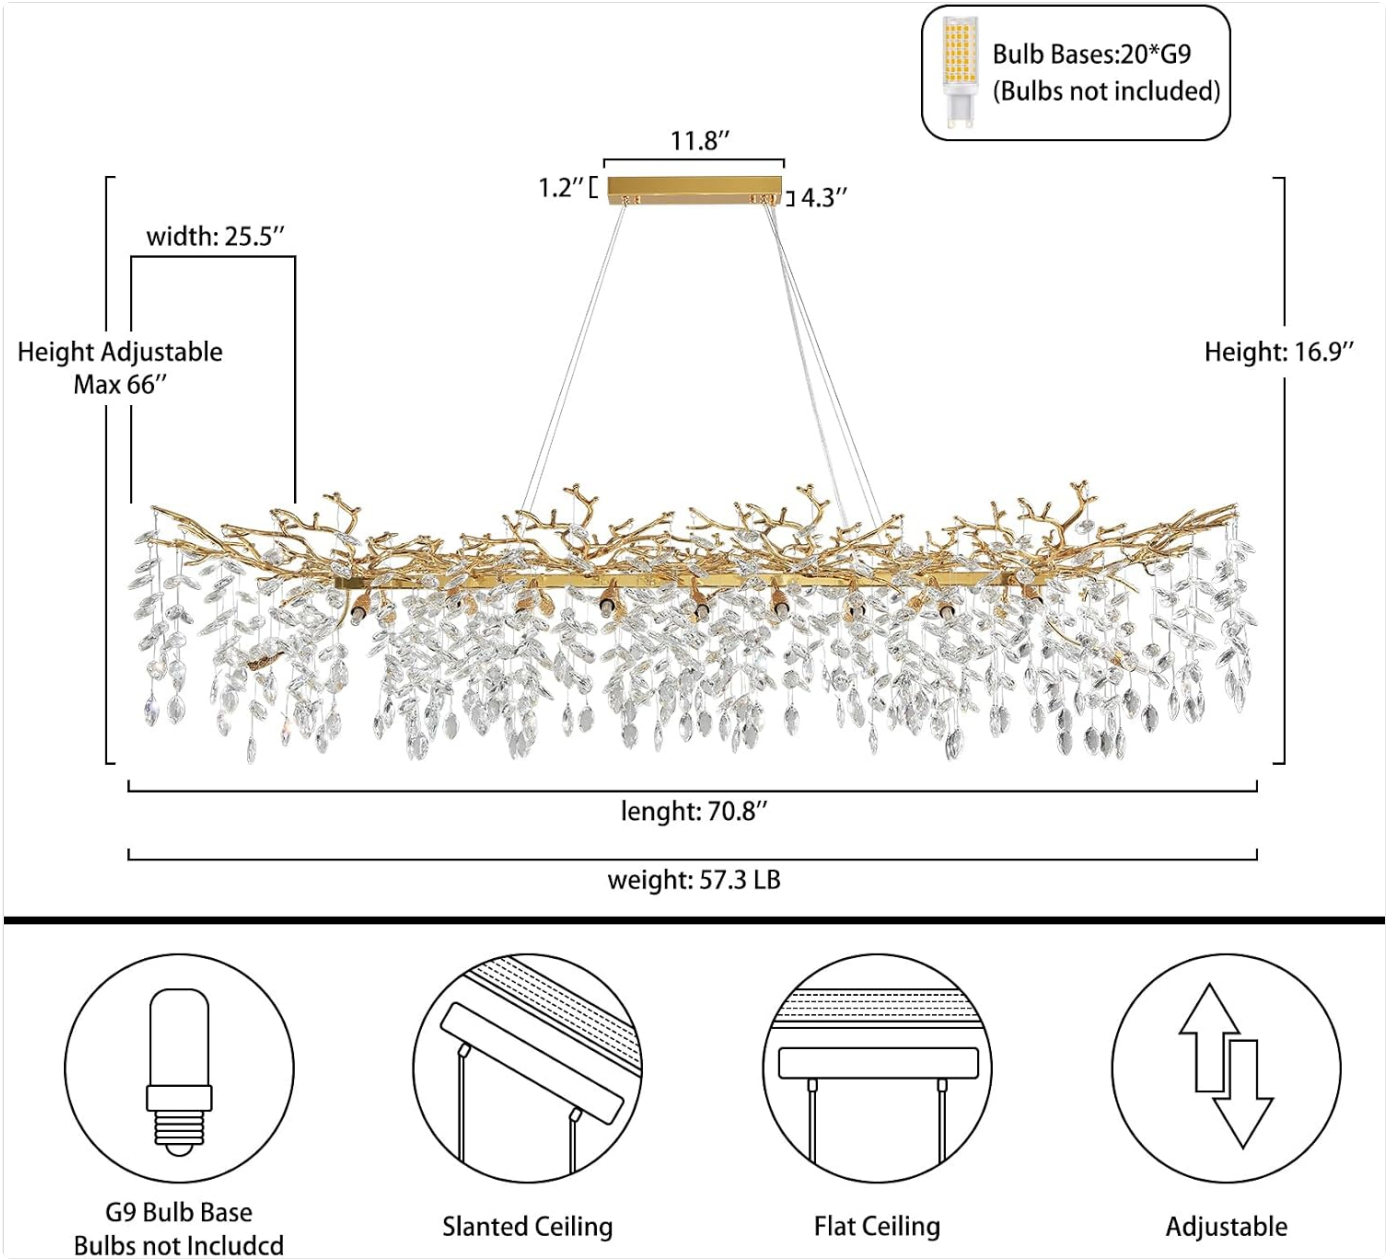


Image: This diagram illustrates the detailed dimensions of the chandelier, including its length, width, height, and adjustable cable length. It also highlights features like G9 bulb compatibility and suitability for various ceiling types.

Setup and Installation

Follow these steps carefully to install your chandelier. It is recommended to have two people for installation due to the size and weight of the fixture.

Video Guide: Installation Steps

Your browser does not support the video tag.

Video: This official YUYI video provides a step-by-step guide for installing the rectangular branch chandelier, covering assembly of the branches, wiring, and hanging the crystals.

1. **Prepare the Chandelier Body:**

   Carefully unpack all components. Identify the main chandelier body and the decorative tree branches. Use a cross screwdriver to remove the screws on the lamp body to prepare for attaching the branches.



Image: A close-up view of the simulated tree branches, highlighting their intricate design and attachment points.

2. **Install Decorative Branches:**

   Attach the decorative tree branches to the main lamp body one by one using the provided screws. Ensure each branch is securely fastened to avoid losing screws during the process.

3. **Mount the Crossbar:**

   Remove the crossbar from the preassembled mounting base. Securely mount the crossbar onto the ceiling junction box using the provided screws. Ensure it is firmly attached and can support the chandelier's weight.

4. **Connect the Wires:**

   Connect the chandelier's wires to your household electrical wires. Match the neutral (white) wire from the chandelier to the neutral wire from the ceiling, and the live (black) wire from the chandelier to the live wire from the ceiling. Connect the ground wire securely. Use wire nuts to cap all connections.

5. **Secure the Chandelier to the Ceiling:**

   Carefully lift the chandelier body and align it with the mounted crossbar. Lock the crossbar on the junction box with the screw, ensuring the chandelier is stable and level. Adjust the hanging cables to your desired height (0-66 inches adjustable).



Image: This image demonstrates how to adjust the height of the chandelier by pressing a button on the canopy.

6. **Hang the K9 Crystals:**

   Wearing the provided gloves, carefully hang each K9 crystal string onto the decorative branches. Distribute the crystals evenly to maintain balance and achieve the desired aesthetic. Refer to the diagram in the package for crystal placement if available.



Image: A detailed view of the K9 crystals and the decorative holes on the branches where they are to be hung.

7. **Install G9 Bulbs:**

   Screw in 20 G9 bulbs (Max. 40W each, not included) into the lamp holders. Ensure bulbs are securely seated.



Image: This image shows the chandelier with G9 bulbs installed, illustrating the difference between the light being off and on.

8. **Test the Chandelier:**

   Restore power at the main circuit breaker and test the chandelier to ensure all lights are functioning correctly.

Operating Instructions

The YUYI 71" Modern Crystal Chandelier operates via a standard wall switch (not included). If you have installed dimmable G9 bulbs and a compatible dimmer switch, you can adjust the light intensity.

- **Turning On/Off:** Use your wall switch to turn the chandelier on or off.
- **Dimming Function:** If using dimmable G9 bulbs and a compatible dimmer switch, adjust the dimmer to control the brightness level.

Maintenance

- **Cleaning:**

  To clean the chandelier, first ensure the power is off at the circuit breaker. Use a soft, dry, or slightly damp cloth to wipe the metal frame. For the K9 crystals, use a soft, lint-free cloth and a mild glass cleaner. Avoid abrasive cleaners or harsh chemicals that could damage the finish or crystals.
- **Bulb Replacement:**

Before replacing bulbs, turn off the power at the circuit breaker. Allow old bulbs to cool completely before removing. Replace with new G9 bulbs (Max. 40W). Do not exceed the maximum wattage.

- **Regular Inspection:**

  Periodically check all connections and hanging components to ensure they remain secure. Tighten any loose screws as needed.

Troubleshooting

Problem	Possible Cause	Solution
Chandelier does not light up.	1. Power is off. 2. Loose wire connections. 3. Faulty bulbs. 4. Faulty wall switch.	1. Check circuit breaker and wall switch. 2. Turn off power, check and secure all wire connections. 3. Replace bulbs. 4. Consult a qualified electrician.
Lights flicker.	1. Loose bulb connection. 2. Incompatible dimmer switch or bulbs. 3. Loose wiring.	1. Turn off power, tighten bulbs. 2. Ensure dimmable bulbs are used with a compatible dimmer. 3. Turn off power, check and secure all wire connections.
Chandelier hangs unevenly.	1. Unevenly adjusted hanging cables. 2. Uneven crystal distribution.	1. Adjust hanging cables to ensure level. 2. Redistribute crystals evenly.

Warranty and Support

Your YUYI 71" Modern Crystal Chandelier comes with a **5-Year Warranty** covering all defects, including missing or replacement parts. We also offer a 30-day return policy for a 100% refund or replacement for any quality issues.
For any questions, concerns, or warranty claims, please contact YUYI customer service. We are committed to providing quick responses and resolving all your problems.
Visit the YUYI Store on Amazon for more information and support.

© 2026 YUYI. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question