

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [My Pet Command](#) /

› [My Pet Command Indoor Pet Barrier System Instruction Manual](#)

My Pet Command MPC150 Xtra Collar

My Pet Command Indoor Pet Barrier System

INSTRUCTION MANUAL FOR MPC150 EXTRA COLLAR



Introduction

The My Pet Command Indoor Pet Barrier System is designed to help train your pets to stay away from designated off-limit areas within your home. This system utilizes a wireless barrier transmitter (sold separately) and a rechargeable collar to provide static and tone correction, or tone-only correction, to guide your pet's behavior. This manual specifically covers the MPC150 Extra Collar.



The My Pet Command Indoor Pet Barrier helps define off-limit zones for your pet.

What's Included (Extra Collar Only)

- 1 x Waterproof Rechargeable Collar (for neck sizes 6" to 20" / 10-53 cm)
- 1 x USB Charging Cable
- 2 sets of Long and Short Metal Contact Prongs with Silicone Covers
- 1 set of Plastic Contact Prongs (for tone-only training)
- 1 x Test Bulb Tool



This image displays the complete contents of the MPC150 Extra Collar package, including the orange and black pet collar unit, a USB charging cable, different sizes of metal contact prongs, silicone covers, and a clear test light tool.

Setup

Barrier Transmitter (Sold Separately)

The Indoor Pet Barrier Transmitter (Model MPC150) requires 3x AA batteries (not supplied). For optimal performance and battery life (up to 1.5 months), use quality, non-rechargeable alkaline batteries. Do not use rechargeable batteries.

Place the barrier transmitter in the center of the area you wish to make off-limits. Avoid placing it on metal surfaces, as this can interfere with the radio signal.

Adjust the barrier's radius using the '+' and '-' buttons on the transmitter. The adjustable range is approximately 1 to 8 feet. The display will show a dog icon with waves indicating the set range.

Indoor Wireless Pet Fence

Circular boundary with adjustable radius range of approx. 1-8ft to customize



IP54 Waterproof Collars



Barrier Battery
Uses 3 x AA Batteries (Not Included)



Collar Battery
Uses Rechargeable Battery. Recharge via USB Cable supplied



The barrier transmitter creates a circular boundary with an adjustable radius from 1 to 8 feet.

Collar Charging

The collar is rechargeable via the supplied USB cable. Connect the USB cable to the charging port on the collar (located under a small metal disc that can be opened with a coin). A full charge typically lasts 3-4 days if the collar is left on continuously.

Attaching Contact Prongs

Choose the appropriate contact prongs (metal for static/tone, plastic for tone-only) based on your dog's coat length and training needs. Screw them firmly into the collar unit. Silicone covers can be placed over the metal prongs for added comfort while still allowing static correction.

Collar Fitting

Ensure the collar fits snugly but comfortably around your dog's neck. The contact prongs should make consistent contact with your dog's skin. You should be able to fit two fingers comfortably between the collar and your dog's neck.

Operating the System

Turning the Collar On/Off

To turn the collar ON, press and hold the On/Off button (center button) until the red light illuminates, then turns green.

To turn the collar OFF, press and hold the On/Off button until the green light turns off.

Selecting Correction Mode

The collar has two modes:

- Mode 1 (Tone + Static):** When the collar is ON, if the green light flashes once every 5 seconds, it is in Mode 1. In this mode, the collar will first emit a tone. If the dog does not leave the boundary area, it will then deliver a static correction. This pattern repeats three times. After the third attempt, if the dog remains in the area, only the tone will be emitted for safety.
- Mode 2 (Tone Only):** To switch to Mode 2, briefly press the On/Off button while the collar is on. The green light will flash twice every 5 seconds. In this mode, the collar will only emit a tone when the dog enters the off-limits area, without static correction.

Pairing Collar with Barrier

The barrier transmitter has three channels: A, B, and A+B.

To pair a collar, ensure the barrier transmitter is turned on and set to the desired channel (A, B, or A+B).

Turn on the collar. The collar will automatically pair with the active channel of the barrier transmitter.

For multiple dogs, you can purchase additional collars and set them to different channels (A or B) or both (A+B) if you want them to respond to the same barrier.



The barrier transmitter allows for control of multiple collars by selecting individual channels (Dog A, Dog B) or a combined channel (Both A-B).

Maintenance

- Keep the collar and barrier clean and dry.
- Regularly check the collar for wear and tear.
- Ensure the contact prongs are clean and free of debris for effective operation.
- Recharge the collar every 3-4 days if used continuously.
- Replace the 3x AA batteries in the barrier transmitter approximately every 1.5 months if left on constantly.



The collar is IP54 waterproof rated, suitable for light rain but not for swimming.

Troubleshooting

Collar Not Activating

- Check if the collar is turned on (green light flashing).
- Ensure the barrier transmitter is on and has fresh batteries.
- Verify that the collar and barrier are on the same channel (A, B, or A+B).
- Confirm the collar is within the set radius of the barrier.
- For static correction, ensure metal prongs are used and making good skin contact. Use the provided test bulb tool to verify static output.

Short Battery Life

- Ensure you are using quality, non-rechargeable AA batteries in the barrier transmitter.
- Fully charge the collar before each use.

Inconsistent Barrier Range

- Avoid placing the barrier transmitter on or near large metal objects, as this can interfere with the signal.
- Adjust the barrier's radius setting on the transmitter.

Specifications

Feature	Detail
Brand	My Pet Command
Model Number	MPC150 Xtra Collar
Item Weight	5.2 ounces
Item Dimensions (LxWxH)	2.36 x 1.57 x 1.18 inches
Collar Neck Size	6" - 20" (10-53 cm)
Barrier Range	Approx. 1-8 feet (adjustable)
Collar Battery	1 Lithium Ion battery (included), rechargeable
Barrier Battery	3x AA Batteries (not supplied)
Waterproof Rating	IP54 (splash-proof, not for swimming)
Target Audience	Dogs (not tiny dogs), 6+ months old, 5+ lbs
Country of Origin	China
Date First Available	August 16, 2023

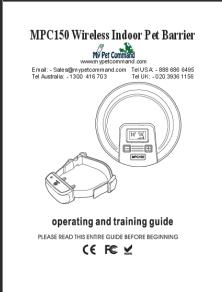
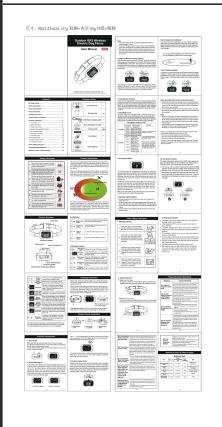

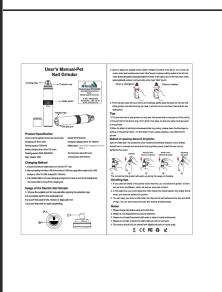
Warranty & Support

My Pet Command offers a 12-month manufacturer warranty for this product.

For any issues or support, please contact My Pet Command customer care.

Visit the official My Pet Command Store for more information: [My Pet Command Store](#)

Related Documents - MPC150 Xtra Collar

	<p>MPC150 Wireless Indoor Pet Barrier Operating and Training Guide Comprehensive guide for the MPC150 Wireless Indoor Pet Barrier, covering setup, operation, training, and troubleshooting for effectively containing pets within designated indoor areas.</p>
	<p>My Pet Command MPC722 Outdoor GPS Wireless Dog Fence User Manual Comprehensive user manual for the My Pet Command MPC722 outdoor wireless GPS dog fence system. Learn setup, operation, and safety features for reliable pet containment.</p>
	<p>My Pet Command 0.5 Mile Rechargeable Remote Spray Dog Trainer - User Manual & Guide Comprehensive user manual for the My Pet Command 0.5 Mile (800M) Rechargeable Remote Spray Dog Trainer. Learn about features, operation, safety, training tips, and troubleshooting.</p>
	<p>My Pet Command Pet Nail Grinder User Manual - MPCNG2000 Comprehensive user manual for the My Pet Command MPCNG2000 speed-control pet nail grinder. Learn how to charge, use, and maintain your pet's nail grinder safely and effectively.</p>
	<p>Aweec 2-in-1 Wireless Dog Fence and Training Collar User Manual User manual for the Aweec 2-in-1 Wireless Dog Fence and Training Collar, detailing setup, operation, working principles, and troubleshooting for effective pet containment and training.</p>