

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [Mesqool](#) /

› [Mesqool CR1008iR Vibrating Alarm Clock User Manual](#)

Mesqool CR1008iR

Mesqool CR1008iR Vibrating Alarm Clock User Manual

Model: CR1008iR

INTRODUCTION

This manual provides detailed instructions for the setup, operation, and maintenance of your Mesqool CR1008iR Vibrating Alarm Clock. Please read this manual thoroughly before using the product to ensure proper function and longevity.



Image: The Mesqool CR1008iR Vibrating Alarm Clock, featuring a large digital display and an external bed shaker.

PRODUCT OVERVIEW

The Mesqool CR1008iR is a versatile alarm clock designed for various users, including heavy sleepers, seniors, and the hearing impaired. Key features include:

- **Multiple Wake-Up Modes:** Choose from loud buzzer, powerful bed shaker, or a combination of both.
- **Customizable RGB Display:** Large LED screen with 8-color options and dynamic display modes.
- **8-Color Night Light:** Soft bottom glow with adjustable brightness.
- **Dual USB Charging Ports:** Includes USB-A and USB-C ports for convenient device charging.
- **Battery Backup:** Maintains time and alarm settings during power outages (requires 2x AAA batteries, not included).
- **Snooze Function:** Up to 81 minutes of extra rest with 9-minute snooze intervals.
- **12/24-Hour Format & DST:** Easy switching between time formats and Daylight Saving Time activation.

SETUP

1. **Power Connection:** Connect the provided power adapter to the DC 5V port on the back of the alarm clock and plug it into a standard wall outlet. The display will illuminate.
2. **Battery Backup Installation:** Open the battery compartment on the bottom of the clock. Insert two

(2) AAA batteries (not included), ensuring correct polarity (+/-). These batteries will preserve your time and alarm settings during a power interruption but will not power the display or night light.

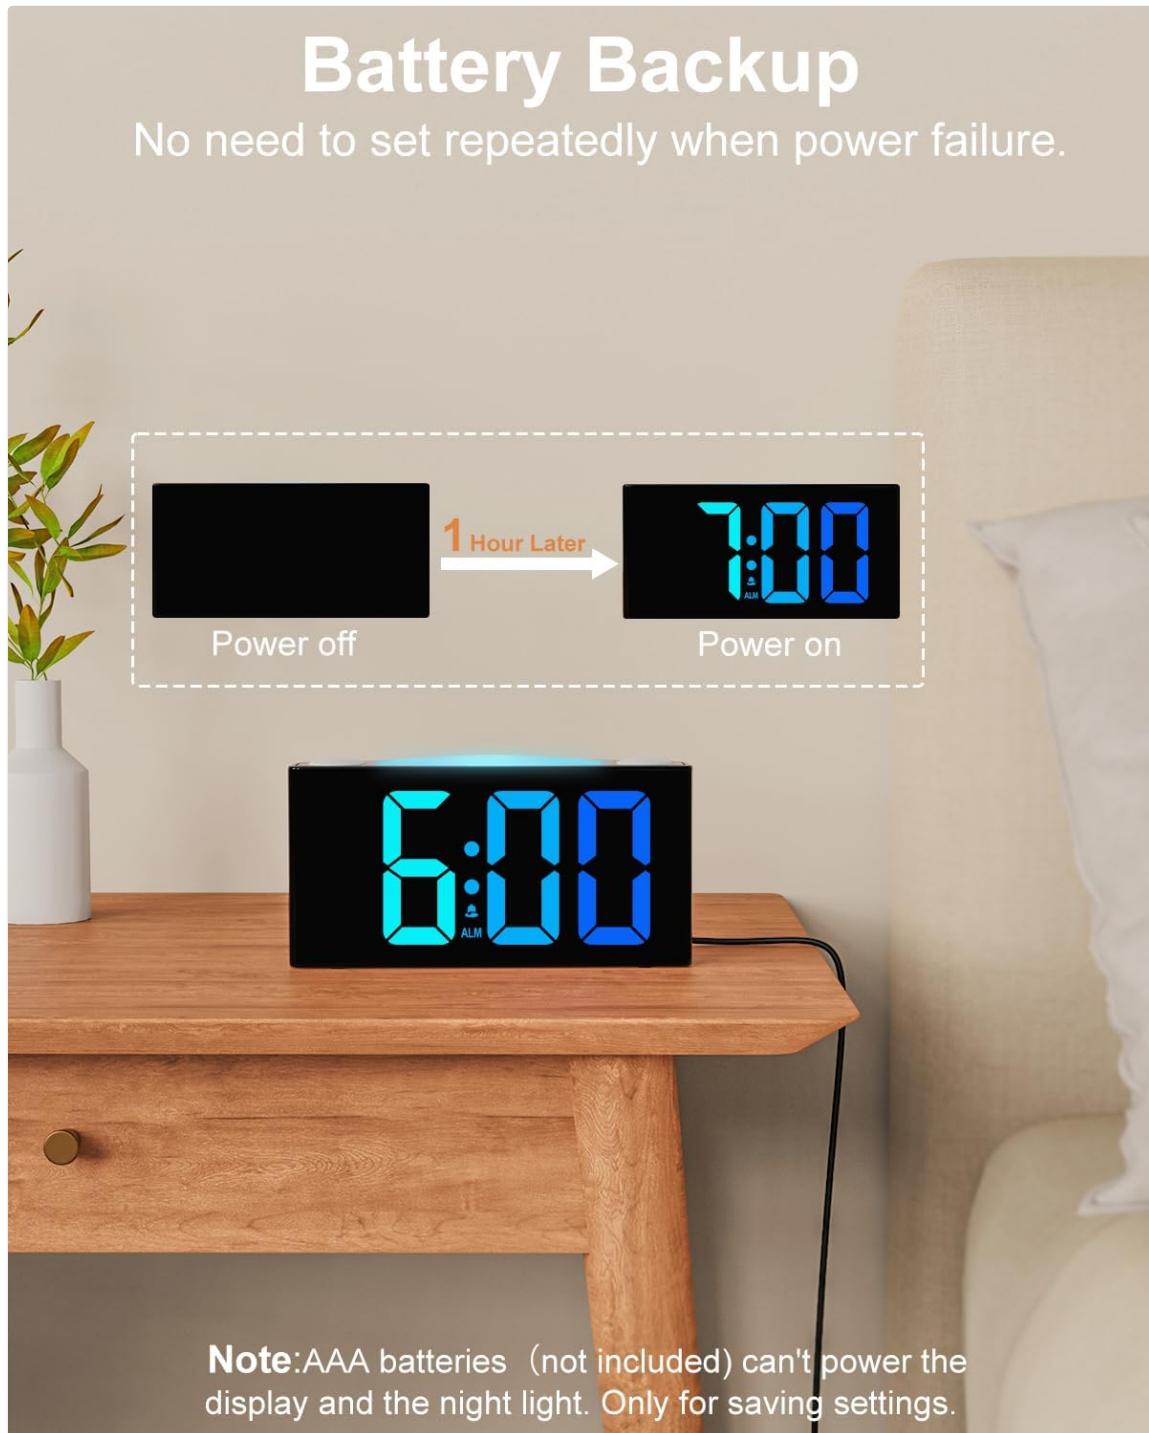


Image: The back of the Mesqool alarm clock, illustrating the battery compartment for backup AAA batteries.

3. **Bed Shaker Connection:** Plug the bed shaker cable into the designated shaker port on the back of the alarm clock. Place the bed shaker under your pillow or mattress for optimal vibration.

OPERATING INSTRUCTIONS

1. Setting the Time

1. Press and hold the **TIME SET** button (located on the back) until the hour digits flash.
2. Use the **HOUR** button (top right) to adjust the hour.
3. Use the **MIN** button (top left) to adjust the minute.
4. Press **TIME SET** again to confirm and exit time setting mode.

2. Setting the Alarm

1. Press and hold the **ALARM SET** button (located on the back) until the alarm hour digits flash.
2. Use the **HOUR** button to adjust the alarm hour.
3. Use the **MIN** button to adjust the alarm minute.
4. Press **ALARM SET** again to confirm the alarm time.
5. Immediately after setting the alarm time, press the **ALARM MODE** button (on the back) repeatedly to cycle through the alarm modes: Buzzer only, Vibration only, or Buzzer + Vibration. The corresponding icon will appear on the display.
6. Press **ALARM SET** one more time to exit alarm setting mode.

3 Wake Up Modes

Loud Buzzer



For General Needs

Powerful Bed Shaker

For Hervy Sleepers



Buzzer + Bed Shaker



For Special Needs

Image: Visual representation of the three available wake-up modes: audible buzzer, physical bed shaker, and a combination of both.

3. Snooze Function

When the alarm sounds, press the large **SNOOZE/LIGHT** button on top of the clock to activate the snooze function. The alarm will pause for 9 minutes and then sound again. This can be repeated up to 9 times for a maximum of 81 minutes of snooze time.

Snooze & 3-Level Adjustable Volume



LOW

MEDIUM

HIGH

Image: A hand pressing the large snooze button on the alarm clock, illustrating the snooze function and adjustable volume settings.

4. Adjusting Display Brightness

Press the **DIMMER** button (on the back) repeatedly to cycle through the 7 levels of display brightness, from brightest to off.

5. Night Light Function

Press the **SNOOZE/LIGHT** button (on top) to turn the night light on/off. Press and hold the **SNOOZE/LIGHT** button to cycle through the 8 available colors or activate the RGB breathing light mode. The night light has 3 adjustable brightness levels.

4 Dynamic Time Display Color Modes



Random Color



RGB Changing



RGB Left to Right Flowing



RGB Top Downward Flowing



Level2



Level7

6 Fixed Time Display Color Modes



Green



Blue



Pink



Red



Ice blue



White



Level1



Level7

Image: The Mesqool alarm clock showcasing its 8-color dimmable night light feature, providing ambient illumination.

6. USB Charging Ports

The alarm clock features one USB-A and one USB-C charging port on the back. These ports can be used to charge compatible electronic devices such as smartphones, smartwatches, or earbuds. Ensure your device's charging cable is properly connected.

Type-A & Type-C Charging Ports



Image: The back of the Mesqool alarm clock with a smartphone and earbuds charging via its integrated USB-A and USB-C ports.

7. 12/24-Hour Format and Daylight Saving Time (DST)

- To switch between 12-hour and 24-hour time formats, press the **12/24H** button (on the back).
- To activate or deactivate Daylight Saving Time, press the **DST** button (on the back). The time will adjust by one hour, and the DST indicator will appear/disappear on the display.



Image: The Mesqool alarm clock showing examples of its 12-hour, 24-hour, and Daylight Saving Time (DST) display options.

Maintenance

- **Cleaning:** Wipe the clock with a soft, dry cloth. Do not use abrasive cleaners or solvents.
- **Storage:** If storing the clock for an extended period, remove the AAA backup batteries to prevent leakage.
- **Environment:** Keep the clock away from direct sunlight, extreme temperatures, and high humidity.

Troubleshooting

Problem	Solution
Clock display is off or flickering.	Ensure the power adapter is securely plugged into both the clock and the wall outlet. Check if the power outlet is functional.
Alarm does not sound/vibrate.	Verify that the alarm is set and activated (alarm icon visible on display). Check the alarm mode (buzzer, vibration, or both). Ensure the bed shaker is properly connected.
Time/alarm settings reset after power outage.	Install two (2) fresh AAA batteries for backup. The backup batteries only save settings, they do not power the display.
USB charging ports not working.	Ensure the clock is powered by the AC adapter. The USB ports require main power to function. Check the charging cable and device compatibility.
Display is too bright/dim.	Press the DIMMER button on the back to adjust the display brightness through its 7 levels.

SPECIFICATIONS

- **Brand:** Mesqool
- **Model:** CR1008iR
- **Display Type:** Digital LED
- **Power Source:** Plug-in (AC adapter)
- **Battery Backup:** 2 x AAA batteries (not included) for settings retention
- **Product Dimensions:** 3.39"W x 1.93"H
- **Item Weight:** 15.5 ounces
- **Material:** Acrylonitrile Butadiene Styrene (ABS)
- **Special Features:** Vibrating Alarm, Loud Buzzer, 8-Color Night Light, Dual USB Charging (Type-A & Type-C), Dimmable Display, Snooze Function, 12/24H & DST.

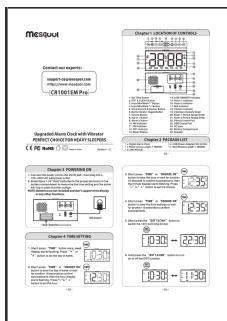
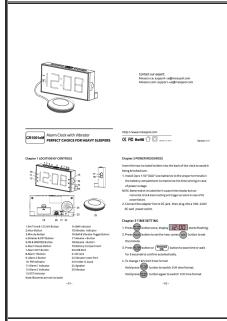
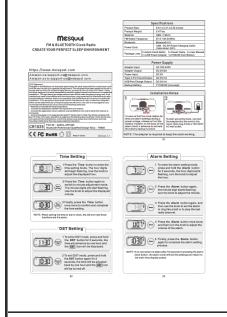
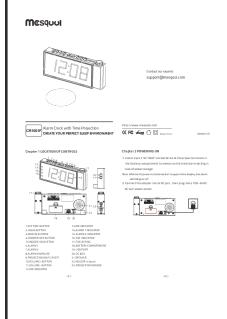
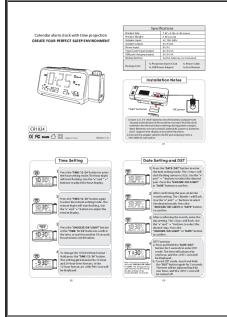
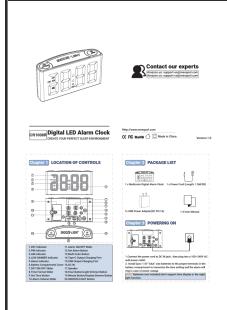
WARRANTY INFORMATION


This Mesqool CR1008iR Vibrating Alarm Clock comes with a **Limited Warranty**. For specific details regarding warranty coverage, duration, and claims process, please refer to the warranty card included in your product packaging or contact Mesqool customer support.

CUSTOMER SUPPORT

If you encounter any issues or have questions not covered in this manual, please contact Mesqool customer support for assistance. You can typically find contact information on the product packaging, the official Mesqool website, or through your purchase platform.

For additional resources, you may visit the [Mesqool Store on Amazon](#).

	<p>Mesqool CR1001EM Pro Alarm Clock User Manual</p> <p>User manual for the Mesqool CR1001EM Pro alarm clock, detailing setup, time setting, alarm configuration, dimmer, USB charging, and troubleshooting.</p>
	<p>Mesqool CR1001eM Alarm Clock with Vibrator User Manual</p> <p>User manual for the Mesqool CR1001eM Alarm Clock with Vibrator, detailing its features, controls, alarm settings, dimmer, DST, USB charging, and vibrator functions. Perfect for heavy sleepers.</p>
	<p>Mesqool CR1025 Digital Alarm Clock Radio with Bluetooth and FM</p> <p>User manual for the Mesqool CR1025 digital alarm clock radio. Features include Bluetooth 5.0 speaker, FM radio, night light, USB/Type-C charging, adjustable dimmer, snooze function, and battery backup. Learn how to set alarms, use Bluetooth, tune FM radio, and adjust settings.</p>
	<p>Mesqool CR1001F Projection Alarm Clock User Manual</p> <p>User manual for the Mesqool CR1001F Projection Alarm Clock, detailing its features, controls, time setting, alarm setting, projection mode, dimmer, DST, and USB charging.</p>
	<p>CR1024 Projection Alarm Clock User Manual</p> <p>User manual for the CR1024 Projection Alarm Clock, detailing setup, time and date settings, alarm functions, projection features, brightness control, temperature/humidity display, and device charging capabilities.</p>
	<p>Mesqool CR1008R Digital LED Alarm Clock User Manual</p> <p>Comprehensive user manual for the Mesqool CR1008R Digital LED Alarm Clock. Learn about its features, controls, time setting, alarm functions, night light, RGB display modes, device charging, and warranty information.</p>

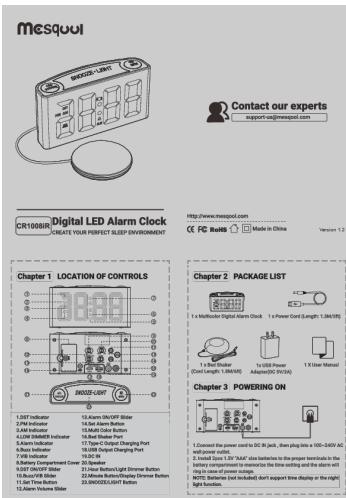


[\[pdf\]](#)

3401000305 MESQOOL CR1008IR 2024 6 1 V1 2 cdr KUN Download company mesqool 2025 02

|||

Version 1.2 ...

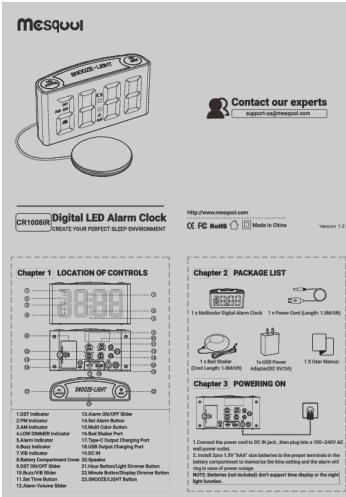lang: score:17 filesize: 1.99 M page_count: 2 document date: 2024-06-01



[\[pdf\]](#) User Manual

3401000305 MESQOOL CR1008IR 2024 6 1 V1 2 cdr KUN User Manual Wake Up on Time

Vibrating Alarm Clock with Bed Shaker Loud Sound Color Display USB Charging 8 Light Battery Backup

Great for Heavy Sleepers Seniors Hearing Impaired Home Kitchen A1P 8gzofSL m media amazon

images |||

Version 1.2 ...

lang: score:15 filesize: 1.99 M page_count: 2 document date: 2024-06-01