



Manuals.plus /

› Enerzen /

› Enerzen Ozone Generator O-777 User Manual

## Enerzen O-777

# Enerzen Ozone Generator 60,000mg Industrial O3 Air Purifier Deodorizer

Model: **O-777** | Brand: **Enerzen**

## 1. PRODUCT OVERVIEW

---

The Enerzen Ozone Generator is an industrial-grade air purifier and deodorizer designed to eliminate strong and lingering odors. It utilizes ozone (O<sub>3</sub>) to react with and remove odors from air, water, fabrics, and walls, offering a solution beyond traditional air filtration.



Figure 1: Enerzen Ozone Generator Model O-777

This device is effective against a wide range of odors including those from smoke, cooking, pets, and mustiness, as well as odors in vehicles, boats, dumpsters, kitchens, bathrooms, basements, and areas affected by flood or fire.

## 2. IMPORTANT SAFETY INFORMATION

**WARNING: All ozone generators are designed for use in unoccupied spaces only. It is critical to remove all people, pets, and plants from the area before operation. After ozone generation is complete, allow an additional 30 minutes for any residual ozone to revert back to breathable air before re-entering the space.**

- Do not operate in occupied spaces.
- Ensure adequate ventilation after treatment.
- Keep out of reach of children.
- Do not block air intake or exhaust vents.
- This product is not available for sale in California.
- EPA Est. No.: 94263-CHN-1

### 3. PACKAGE CONTENTS

Verify that all items listed below are included in your package:



Figure 2: Package Contents

- (1) Enerzen O-777 Unit
- (1) Ceramic Ozone Plate (Pre-installed)
- (1) Washable Stainless Filter (Pre-installed)
- (1) Power Cable
- (1) Door Hanger Notice
- (1) User's Guide

### 4. SETUP

1. **Unpack the Unit:** Carefully remove the Enerzen Ozone Generator and all accessories from the packaging.
2. **Placement:** Place the unit in the center of the unoccupied space you wish to treat. Ensure it is on a stable,

flat surface and that its air intake and exhaust vents are not obstructed.

3. **Connect Power:** Plug the power cable into the unit and then into a standard electrical outlet.
4. **Prepare the Area:** Ensure all people, pets, and plants have been removed from the treatment area. Place the "DO NOT ENTER!" door hanger on the entrance to the treated space.

## 5. OPERATION

---

Operating the Enerzen Ozone Generator is straightforward:

1. **Set Timer:** Turn the timer knob to the desired treatment duration in minutes. The timer can be set for up to 180 minutes (3 hours) or to the "HOLD" position for continuous operation.
2. **Initiate Treatment:** Once the timer is set, the unit will begin generating ozone.
3. **Evacuate the Area:** Immediately leave the space being treated. Ensure no one enters the area during operation.
4. **Post-Treatment Airing:** After the ozone generation cycle is complete (the unit will turn off automatically if the timer was set), allow an additional 30 minutes for any residual ozone to dissipate and revert back to breathable oxygen before re-entering the treated space.

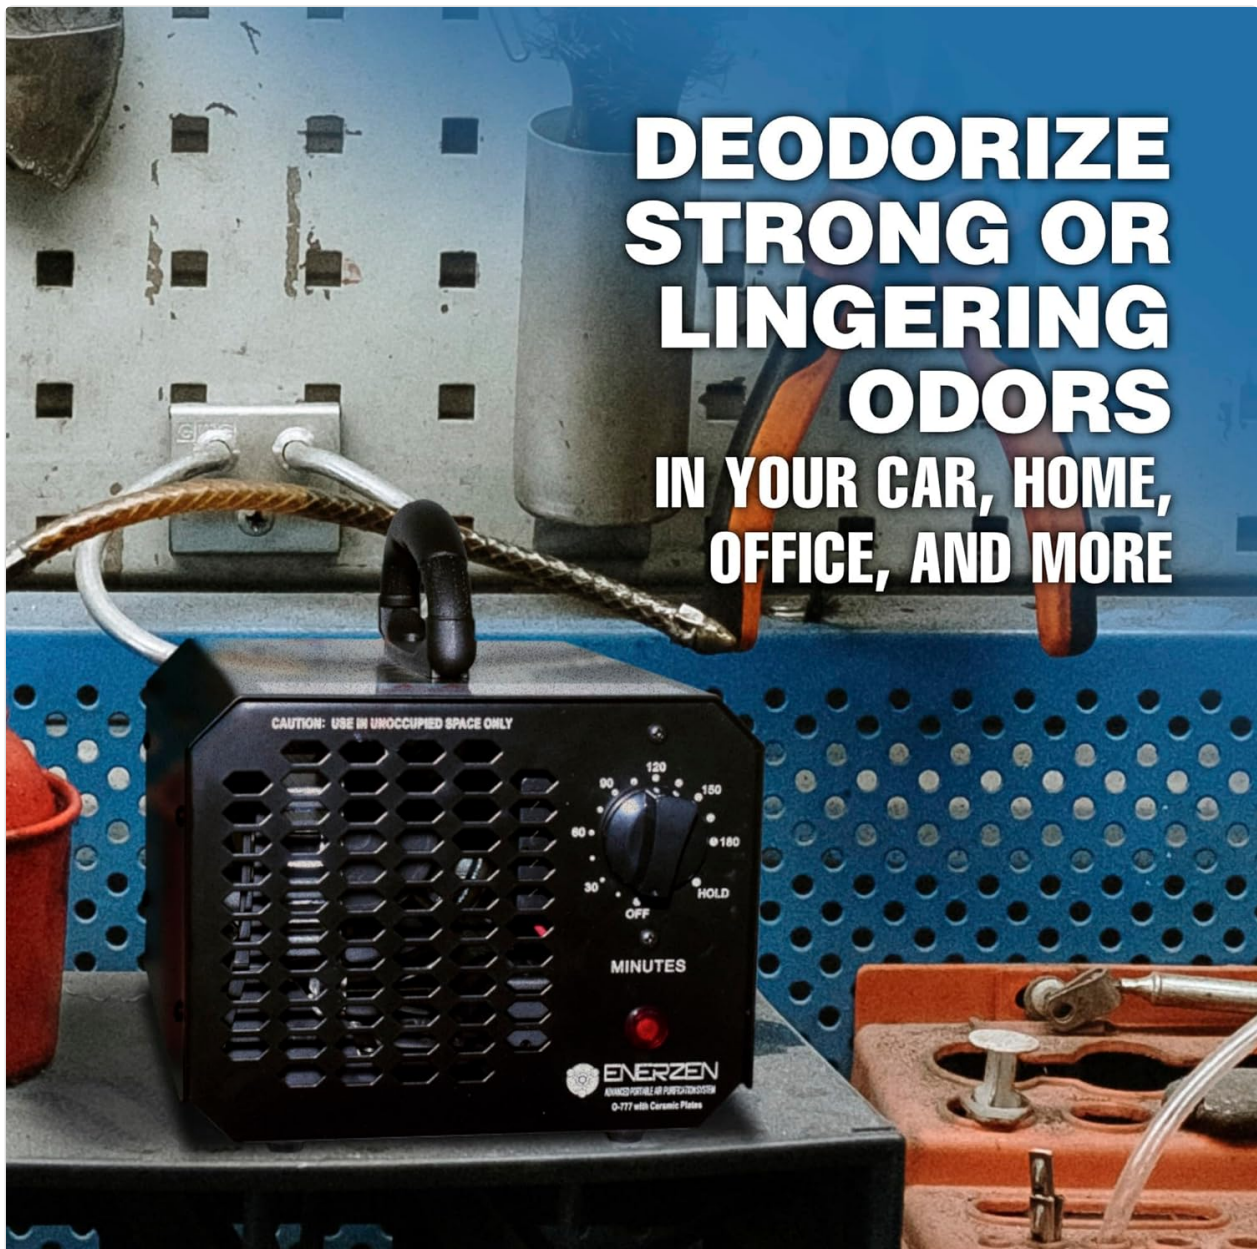


Figure 3: Unit placed in a vehicle for odor removal.



Figure 4: Effective against strong odors like smoke.

## 6. MAINTENANCE

---

Regular maintenance ensures optimal performance and longevity of your Enerzen Ozone Generator:

- **Filter Cleaning:** The unit comes with a pre-installed washable stainless filter. Periodically remove and clean this filter to prevent dust and debris buildup, which can impede airflow and ozone production. Wash with mild soap and water, rinse thoroughly, and ensure it is completely dry before re-installing.
- **Ceramic Ozone Plate:** The ceramic ozone plate is pre-installed. Refer to the full User's Guide for instructions on inspection and replacement if necessary.
- **Exterior Cleaning:** Wipe the exterior of the unit with a soft, damp cloth. Do not use abrasive cleaners or solvents.

## 7. TROUBLESHOOTING

---

If you encounter issues with your Enerzen Ozone Generator, consider the following common solutions:

- **Unit Not Turning On:**

- Check if the power cable is securely plugged into both the unit and the electrical outlet.
- Ensure the electrical outlet is functional by testing it with another device.
- Verify the timer knob is set to a duration or "HOLD" and not "OFF".

- **Reduced Ozone Output:**

- Clean the washable stainless filter as described in the Maintenance section. A clogged filter can restrict airflow.
- Inspect the ceramic ozone plate for any visible damage or excessive buildup. Refer to the full User's Guide for replacement procedures if needed.

- **Odor Persists After Treatment:**

- Ensure the treatment duration was appropriate for the size of the space and the intensity of the odor. Larger spaces or stronger odors may require longer treatment times.
- Verify that the space was completely unoccupied during treatment and that all sources of the odor were addressed as much as possible prior to ozone treatment.

For more detailed troubleshooting or issues not covered here, please refer to the complete User's Guide or contact Enerzen customer support.

## **8. SPECIFICATIONS**

---

# INDUSTRIAL GRADE ALUMINUM ALLOY CASE

with Powder Coating



Figure 5: Durable Industrial Grade Aluminum Alloy Case.

<b>Model Number</b>	O-777
<b>Ozone Output</b>	60,000 mg/h
<b>Wattage</b>	55 watts
<b>Product Dimensions</b>	8 x 6.75 x 5.75 inches (approx. 20.3 x 17.1 x 14.6 cm)
<b>Weight</b>	5 Pounds (approx. 2.27 kg)
<b>Color</b>	Black
<b>Noise Level</b>	30 dB
<b>Certifications</b>	CE Certified

## 9. WARRANTY AND SUPPORT

For detailed warranty information, product registration, or technical support, please refer to the official User Manual included with your product or visit the Enerzen website.

A digital version of the User Manual can be found here: [Enerzen Ozone Generator User Manual \(PDF\)](#)

For any inquiries not covered in this manual, please contact Enerzen customer service directly.