

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [PAPIFEED](#) /

› [PAPIFEED Pet Camera Indoor Security Cam User Manual - Model B0CLZQ75K8](#)

## PAPIFEED B0CLZQ75K8

# PAPIFEED Pet Camera Indoor Security Cam User Manual

Model: B0CLZQ75K8

## PRODUCT OVERVIEW

The PAPIFEED Pet Camera Indoor Security Cam (Model B0CLZQ75K8) is designed to monitor your pets, babies, or home with advanced features. It offers 1080 HD video, 2-way audio, night vision, motion tracking, and is compatible with Alexa and Google Assistant. The camera supports both 2.4GHz and 5GHz WiFi networks for flexible connectivity.

# Pet & Baby Camera Indoor Security Cam



Image: PAPIFEED Pet Camera highlighting 5GHz/2.4GHz WiFi, Alexa, and Google Assistant compatibility.

## KEY FEATURES

- 1080P HD Video:** Provides clear and detailed video monitoring.
- Pan & Tilt Functionality:** Offers 360° horizontal rotation and 110° vertical tilt for comprehensive coverage.
- Dual-Band WiFi:** Supports both 2.4GHz and 5GHz networks for stable connection.
- Two-Way Audio:** Enables real-time communication with pets or family members.
- Enhanced IR Night Vision:** Ensures clear visibility in low-light conditions.
- Motion Detection & Tracking:** Automatically detects and tracks movement, sending alerts to your phone.
- Storage Options:** Supports up to 128GB Micro SD card (not included) for local storage and offers cloud storage options.
- Smart Home Integration:** Compatible with Amazon Alexa and Google Assistant.

# PAPIFEED Pet Camera Indoor Security Ca



360 Intelligent PTZ



1080P HD Video



2.4/5Ghz WiFi



Alexa&Google Access



2-Way Audio Voice Calls



Cloud Storage & SD Card Storage



Excellent Night Vision



Motion Tracking



One Click Scene Switching



Image: Visual representation of the PAPIFEED Pet Camera's key features.

## SETUP GUIDE

### 1. Power Connection

Connect the camera to a power source using the provided power adapter. The indicator light will turn on. Wait approximately 15 seconds until you hear a prompt tone and the camera rotates, indicating it's ready for network connection.

**Notice:** When waiting for connection, the indicator light flashes quickly and makes a prompt tone. Once connected, the indicator light is always on, and no prompt tone is heard.

Your browser does not support the video tag.

Video: PAPIFEED Camera WIFI Connection Guidance. This video demonstrates the power-on sequence and initial connection steps for the camera.

### 2. App Download and Installation

Download the "Smart Life" app from your mobile phone's app store. Ensure your phone's Bluetooth and WLAN are enabled.

### 3. Device Pairing (QR Code Method)

1. Open the "Smart Life" app and tap "Add Device".
2. Select "Camera & Lock" then "Smart Camera (Dual Band)".
3. Check the box confirming the indicator light is flashing quickly and a prompt tone is heard, then click "Next".
4. Enter your WiFi account and password.
5. A QR code will appear on your phone screen. Face your phone's QR code towards the camera lens, keeping a distance of 15-20cm. Move slowly from near to far until you hear a "drop" sound, indicating a successful scan.
6. Confirm you heard the prompt. The camera will then connect. Connection is successful when the indicator light is always on and the prompt tone disappears.

## 4. Device Pairing (WiFi Mode Method)

1. From the "Reset the device" screen in the app, click the button in the upper right corner and select "WiFi Mode".
2. Select "AP Mode".
3. Enter your WiFi account and password, then click "Next".
4. Connect your mobile phone to the camera's hotspot, typically named "SmartLife-XXXX".
5. Return to the app and select "Confirm hot spot connection, next".
6. The camera will then connect. Connection is successful when the indicator light is always on and the prompt tone disappears.

## OPERATING INSTRUCTIONS

---

### Live View and Pan/Tilt Control

Once connected, access the live video feed through the Smart Life app. You can remotely control the camera's pan (horizontal) and tilt (vertical) movements to view different areas of the room. The camera offers 350° horizontal and 110° vertical vision.



Image: Multi-view live feed from the camera, illustrating its pan and tilt functionality.

## Two-Way Audio

Use the two-way audio feature to speak through the camera and hear responses. This is ideal for comforting pets or communicating with family members remotely.

# Home Camera with Phone App 2-Way Audio Voice Calls


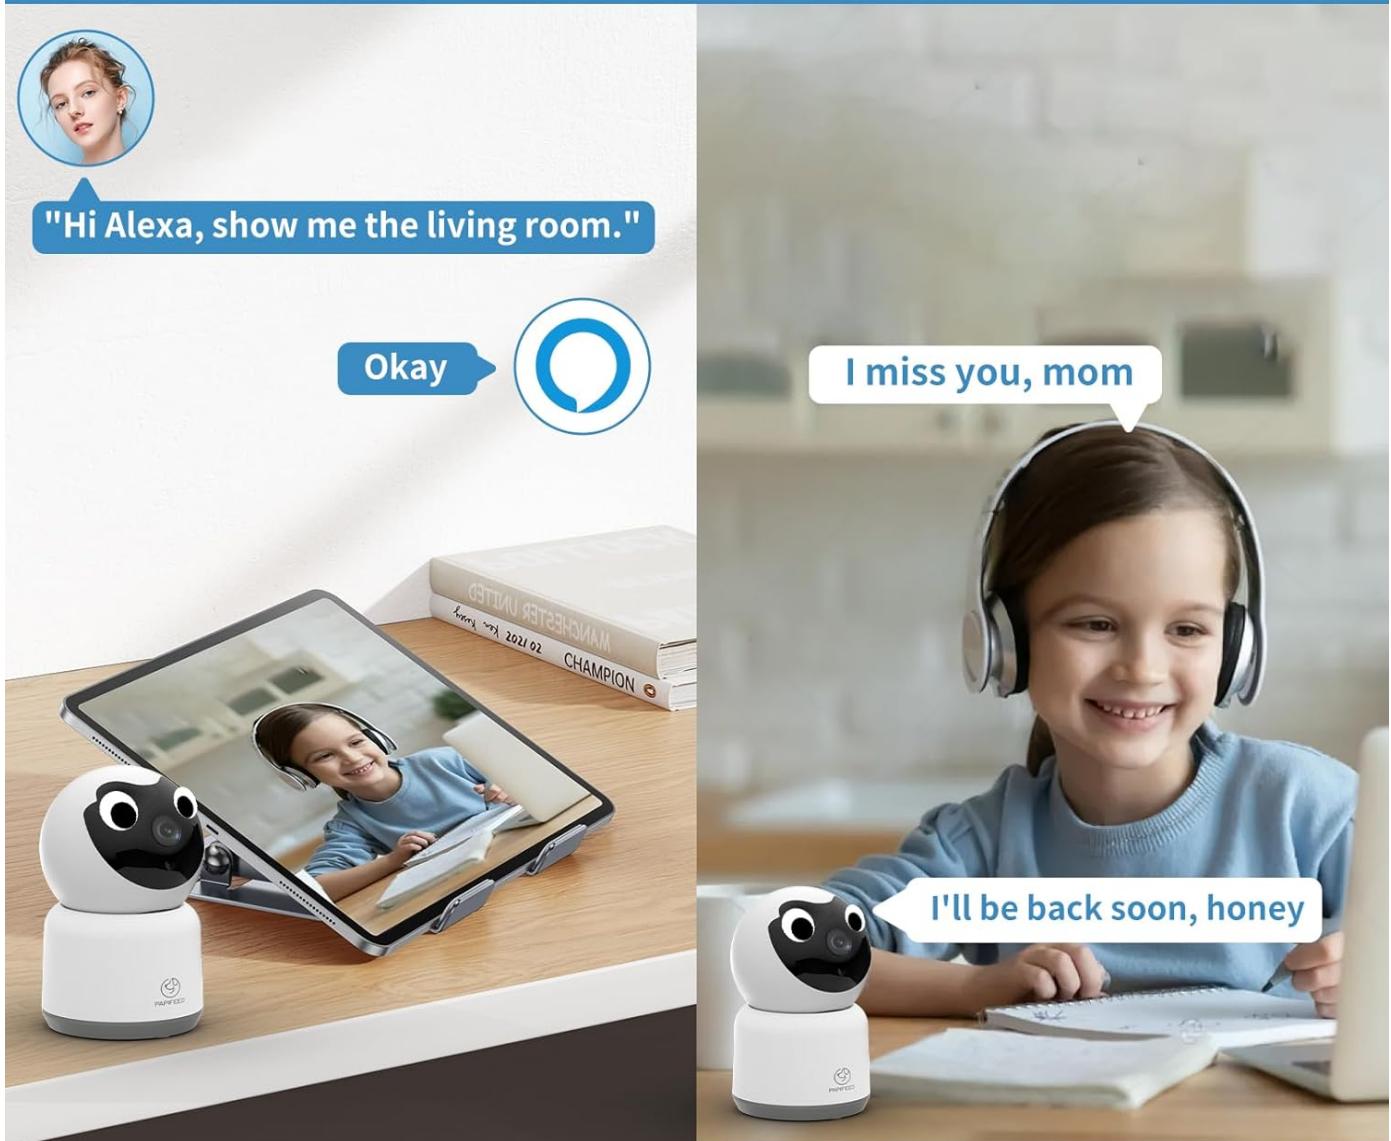


Image: Demonstrating the two-way audio communication feature.

## Night Vision

The camera is equipped with enhanced IR night vision, providing clear black and white video even in complete darkness.

# Superior Night Vision

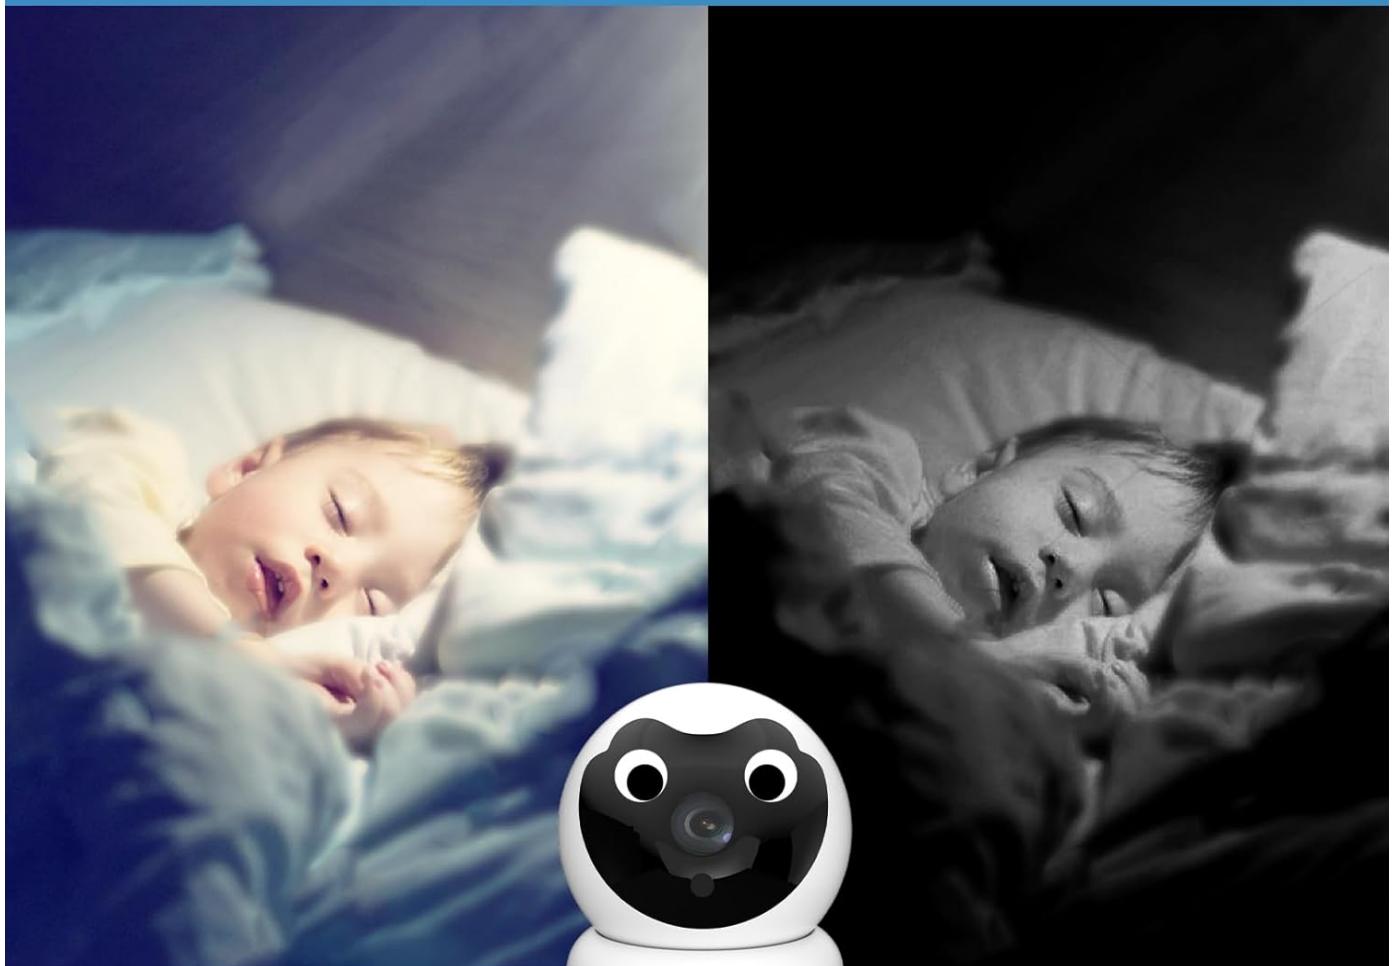

DAY



NIGHT

Image: Comparison of day and night vision, highlighting the camera's night vision clarity.

## Motion Detection and Tracking

Enable motion detection to receive real-time alerts on your phone when movement is detected. The camera can also track moving subjects within its field of view.



## Motion Tracking & Alerts

Real-time alert notifications sent to your phone, check what is going on instantly

Image: Motion tracking and alert notification on a smartphone.

### Storage Options

The camera supports local storage via a Micro SD card (up to 128GB, not included) for continuous 24/7 recording. Cloud storage is also available as an option, providing encrypted video storage.

# 1080P HD Video



30-day free trial  
Cloud Storage



Max 128GB  
Micro SD card



SD card slot



Image: Storage options for the camera, including cloud and SD card.

## INSTALLATION OPTIONS

The PAPIFEED Pet Camera offers versatile installation options to suit your needs:

- Standing:** Place the camera on a flat surface like a table or shelf.
- Wall Mounting:** Securely mount the camera to a wall for an elevated view.
- Ceiling Mounting:** Install the camera on the ceiling for a wide, overhead perspective.

Image: Various installation methods for the camera.

## SPECIFICATIONS

Feature	Detail
Brand	PAPIFEED
Model	B0CLZQ75K8
Video Capture Resolution	1080p, 2K
Connectivity Technology	Wireless (Wi-Fi)
Wireless Communication Technology	Wi-Fi (2.4GHz & 5GHz dual-band)
Special Feature	Phone App Control, 2-Way Audio, Night Vision, Motion Sensor, Works with Alexa & Google Assistant, HD Resolution
Indoor/Outdoor Usage	Indoor
Power Source	Corded Electric
Controller Type	Android (and iOS via Smart Life app)
Form Factor	Dome
Item Dimensions L x W x H	3 x 3 x 5 inches
Item Weight	11.7 ounces
Max SD Card Support	128GB

## MAINTENANCE

To ensure optimal performance and longevity of your PAPIFEED Pet Camera, follow these maintenance guidelines:

- Cleaning:** Gently wipe the camera lens and exterior with a soft, dry cloth. Avoid using harsh chemicals or abrasive materials.
- Placement:** Ensure the camera is placed in a stable location, away from direct sunlight, extreme temperatures, and moisture.
- Software Updates:** Regularly check the Smart Life app for firmware updates to ensure your camera has the latest features and security enhancements.

## TROUBLESHOOTING

If you encounter issues with your PAPIFEED Pet Camera, refer to the following common troubleshooting steps:

- Connection Issues:**

- Ensure your WiFi network is stable and within range.
- Verify that you have entered the correct WiFi password.
- Check if the camera's indicator light is flashing quickly (waiting for connection) or solid (connected).
- Try restarting the camera and your router.
- Confirm your phone's Bluetooth and WLAN are enabled during setup.

- No Video/Poor Quality:**

- Check your internet connection speed.

- Ensure the camera lens is clean and unobstructed.
- Verify the camera is powered on and connected to the network.

- **Two-Way Audio Problems:**

- Check the volume settings on your phone and within the app.
- Ensure there is no interference near the camera's microphone or speaker.

- **Motion Detection Not Working:**

- Verify motion detection settings are enabled in the Smart Life app.
- Adjust sensitivity settings if necessary.

- **Resetting the Camera:** If issues persist, locate the reset button (often near the SD card slot) and press and hold it for several seconds until the camera resets. Then, attempt to re-pair the device.

## **WARRANTY AND SUPPORT**

---

PAPIFEED provides a professional after-sales team and customer service. If you have any questions or encounter issues with your product, please contact PAPIFEED customer support directly. The store offers free product replacement or returns/refunds as part of its quality assurance.

For further assistance, please refer to the contact information provided with your product packaging or visit the official PAPIFEED website.

