

[Manuals.plus](#) /

› [Pool Patch](#) /

› Pool Patch White Pool Tile Grout Repair Kit Instruction Manual

Pool Patch PTGRW3

Pool Patch White Pool Tile Grout Repair Kit Instruction Manual

Model: PTGRW3

INTRODUCTION

The Pool Patch White Pool Tile Grout Repair Kit is designed for repairing and regrouting ceramic, glass, or porcelain swimming pool tiles. This kit includes a waterproof Portland cement-based grout and a liquid cement bonder, formulated for durability and color retention in pool environments. It provides a fast-setting, high-strength solution for DIY pool maintenance.

SAFETY INFORMATION

- Always wear appropriate personal protective equipment, including gloves and eye protection, when handling the grout mix.
- Avoid direct contact with skin and eyes. In case of contact, rinse thoroughly with water.
- Do not ingest. Keep out of reach of children and pets.
- Work in a well-ventilated area.
- Refer to the product's Safety Data Sheet (SDS) for detailed safety information.

WHAT'S INCLUDED

Your Pool Patch White Pool Tile Grout Repair Kit contains:

- 3-Pound Tub of White Pool Tile Grout Mix (Portland cement-based)
- Liquid Cement Bonder Bottle

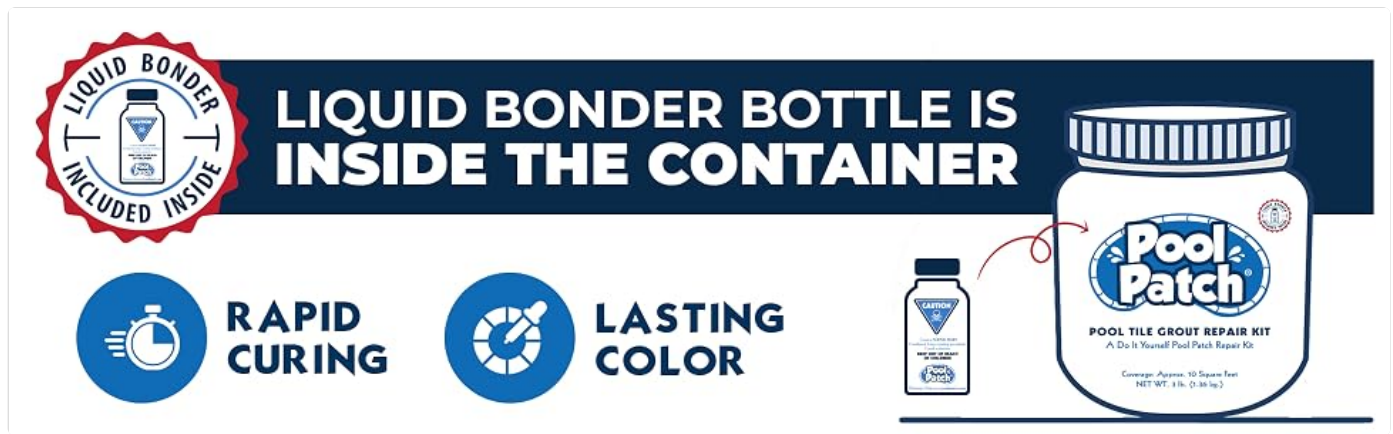


Image: Pool Patch Grout Repair Kit showing the main tub and the included liquid bonder bottle.

SETUP AND PREPARATION

1. **Lower Pool Water:** Ensure the pool water level is at least 4 inches below the tile repair area. The repair surface must be dry.
2. **Clean Area:** Remove any existing loose material, old grout, dirt, or debris from the repair area. The surface should be clean and free of contaminants.
3. **Gather Tools:** Prepare a mixing container, a mixing tool (e.g., trowel, drill with mixer attachment), a grout float, a damp sponge, and a dry soft cloth.



Image: Overview of Pool Patch White Pool Tile Grout Repair Kit highlighting features like being made in USA, perfect for grout voids, and easy to use.

OPERATING INSTRUCTIONS (MIXING AND APPLICATION)

Follow these steps for optimal results:

1. **Mix Grout:** In a clean mixing container, combine the dry grout mix with the liquid cement bonder. The recommended ratio is 2 oz. of liquid cement bonder per 1 1/2 lb. of dry pool patch grout mix. Mix thoroughly until a consistent, lump-free paste is formed. For vertical surfaces or wider grout lines (1/4 inch or greater), aim for a mashed potato consistency. For thinner lines (1/8 inch or less), a slightly soupier consistency may be easier to work with. Mix small batches as needed, as the product sets quickly.
2. **Apply Grout:** Using a grout float or your fingers (with gloves), apply the mixed grout, filling the pool tile area to be grouted. Ensure all voids are completely filled.
3. **Initial Drying:** Allow the applied grout to dry for approximately 5 minutes.
4. **Clean Excess:** Use a damp sponge to lightly wipe off any excess pool tile grout from the tile surface. Work carefully

to create a smooth joint.

5. **Final Curing:** Allow the grout to dry for at least 2 hours. After this period, wipe off any remaining film or haze from the tiles with a dry soft cloth.

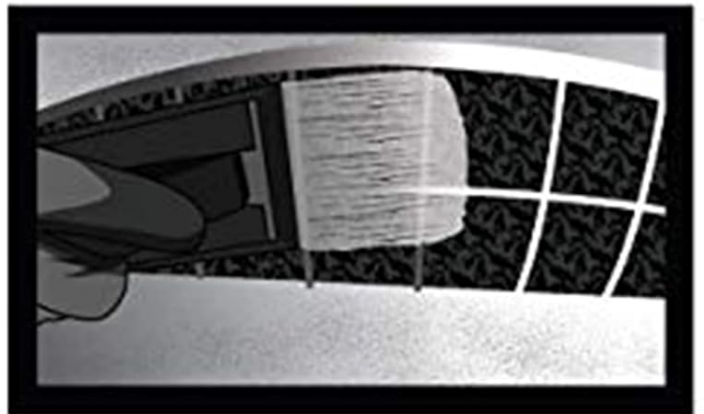


Image: Visual guide showing the three main steps: Mix, Apply, and Clean for the Pool Patch Grout Repair Kit.

Instructional Video

Your browser does not support the video tag.

Video: Official Pool Patch instructional video demonstrating the application process for the White Pool Tile Grout Repair Kit.

MAINTENANCE

Once cured, the Pool Patch grout is designed for lasting durability and color retention. Regular pool maintenance, including balanced chemical levels, will help preserve the integrity and appearance of the repaired grout. Avoid abrasive cleaners directly on the grout lines.

TROUBLESHOOTING

Issue	Possible Cause	Solution
Grout too thick/crumblly	Insufficient liquid bonder or water.	Add small amounts of liquid bonder or water gradually until desired consistency is reached. Mix thoroughly.
Grout too thin/runny	Too much liquid bonder or water.	Add small amounts of dry grout mix until desired consistency is reached. Mix thoroughly.
Grout setting too fast	High ambient temperature or mixing too large a batch.	Work in smaller batches. Consider working during cooler parts of the day if possible.
Haze on tiles after drying	Insufficient cleaning after application.	Gently wipe with a dry soft cloth. For stubborn haze, a specialized grout haze remover may be used, following its instructions carefully.

SPECIFICATIONS

- **Brand:** Pool Patch
- **Model:** PTGRW3
- **Item Weight:** 3 pounds
- **Material:** Acrylic-modified cementitious (Portland cement-based with acrylic polymer latex admixture)
- **Color:** White
- **Coverage:** Approximately 10 sq. ft. at 1/4 inch thickness
- **Water Resistance Level:** Waterproof
- **Compatible Material:** Ceramic, Glass, Porcelain tiles
- **UPC:** 851008005210

WARRANTY INFORMATION

Specific warranty details for the Pool Patch White Pool Tile Grout Repair Kit are not provided in this manual. For information regarding product warranty, please contact Pool Patch directly through their official website or customer service channels.

SUPPORT

For further assistance, questions, or technical support regarding your Pool Patch White Pool Tile Grout Repair Kit, please visit the official Pool Patch website or refer to the contact information provided on the product packaging. You can also find additional resources and tips on their website.

Online Resources: [Visit the Pool Patch Store on Amazon](#)

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question

and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question