



Manuals.plus /

› XANLITE /

› Xanlite PR10WR Rechargeable Outdoor LED Floodlight 10W User Manual

XANLITE PR10WR

Xanlite PR10WR Rechargeable Outdoor LED Floodlight 10W User Manual

Model: PR10WR

1. INTRODUCTION

Thank you for choosing the Xanlite PR10WR Rechargeable Outdoor LED Floodlight. This manual provides essential information for the safe and efficient use of your device. The PR10WR is a versatile and durable LED floodlight designed for outdoor use, featuring IP54 water resistance, USB charging capability, 1000 lumens output, 9W power consumption, and 6000 Kelvin cool white light.

Please read this manual thoroughly before operating the floodlight and retain it for future reference.

2. SAFETY INSTRUCTIONS

- Do not look directly into the LED light when it is on, as this may cause eye damage.
- Keep the device away from extreme temperatures, direct sunlight, and corrosive liquids.
- Ensure the USB charging port cover is securely closed when not charging to maintain IP54 water resistance.
- Do not attempt to disassemble or modify the floodlight. This will void the warranty and may cause damage or injury.
- Use only the specified charging method (USB) and appropriate power sources.
- Dispose of the product and its battery responsibly according to local regulations.

3. PRODUCT OVERVIEW

The Xanlite PR10WR is designed for portability and durability, featuring a robust metal and plastic construction with a convenient handle and adjustable stand.



IP54

IP54

Résistant aux projections d'eau



6 heures

Autonomie longue durée



1000 lm

Eclairage puissant



Rechargeable USB

Image 3.1: Xanlite PR10WR LED Floodlight showcasing its key features: IP54 water resistance, 6 hours of battery life, 1000 lumens of powerful illumination, and USB rechargeability.

Rangement facile



Image 3.2: Front view of the floodlight, illustrating its design optimized for easy storage and transport.

Components:

- LED Light Panel
- Adjustable Stand/Handle
- Power Button
- USB Charging Port
- Battery Indicator Lights

4. SETUP

4.1 Initial Charging

Before first use, fully charge the floodlight. The device is equipped with a Lithium-polymer battery.

1. Locate the USB charging port on the back of the floodlight.
2. Open the protective cover of the USB port.
3. Connect a standard USB charging cable (not always included) to the floodlight's USB port and to a suitable USB power

adapter (e.g., 5V/1A) or computer USB port.

4. The battery indicator lights will illuminate to show charging progress. Once all indicators are solid, the floodlight is fully charged.
5. After charging, securely close the protective cover of the USB port to maintain water resistance.



Image 4.1: Rear view of the floodlight's control panel, featuring the USB charging port, power button, and battery level indicators.

5. OPERATING INSTRUCTIONS

5.1 Powering On/Off

Press the power button located on the back panel to turn the floodlight on or off. Multiple presses may cycle through different brightness modes if available (refer to product packaging for specific mode details).



Image 5.1: The floodlight in operation, providing illumination in a natural environment.

5.2 Adjusting the Light Angle

The floodlight features a rotatable head that can be adjusted 180 degrees. Loosen the adjustment knobs on either side of the light panel, position the light to your desired angle, and then tighten the knobs to secure it.



Image 5.2: Detail of the floodlight's adjustable pivot, allowing for 180-degree rotation of the light head.

5.3 Battery Indicator

The battery indicator lights on the back panel show the remaining charge. Recharge the floodlight when the battery level is low to ensure continuous operation.

6. MAINTENANCE

6.1 Cleaning

Wipe the floodlight with a soft, damp cloth. Do not use abrasive cleaners or solvents, as these may damage the finish or electronic components. Ensure the USB port cover is closed during cleaning.

6.2 Storage

Store the floodlight in a cool, dry place when not in use. For long-term storage, it is recommended to charge the battery every 3-6 months to maintain battery health.

7. TROUBLESHOOTING

- **Light not turning on:** Ensure the battery is charged. If fully charged, try pressing the power button firmly.
- **Light dim or flickering:** The battery may be low. Recharge the floodlight.
- **Charging issue:** Check the USB cable and power adapter. Ensure the cable is securely connected to both the floodlight and the power source.
- **Water ingress:** If water enters the device despite its IP54 rating, ensure the USB port cover was properly sealed. Discontinue use and contact support.

8. SPECIFICATIONS

Model Number	PR10WR
Brand	Xanlite
Light Source Type	LED (Light Emitting Diode)
Wattage	10 Watt
Maximum Light Output	1000 Lumens
Color Temperature	6000 Kelvin (Cool White)
Water Resistance Level	IP54 (Water-resistant)
Power Source	Rechargeable Lithium-polymer Battery
Battery Life (approx.)	6 hours
Charging	USB
Material	Metal, Plastic
Color	Red/Black
Product Dimensions	20 x 18 x 19.5 cm
Item Weight	600 g
Mounting Type	Freestanding / Floor
GTIN	03700619406503

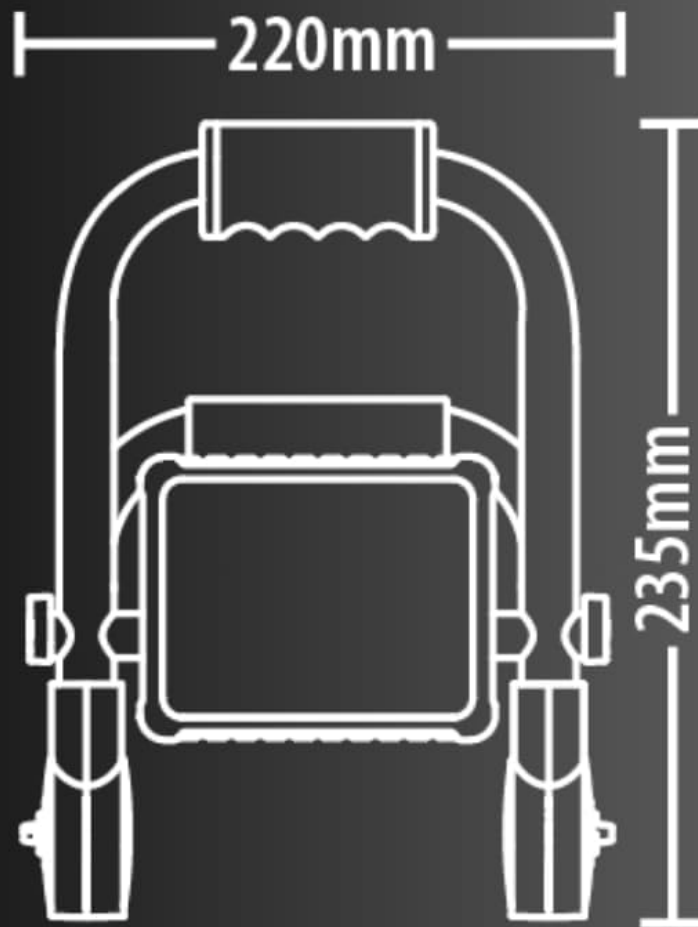


Image 8.1: Dimensional drawing of the Xanlite PR10WR floodlight.

9. WARRANTY AND SUPPORT

9.1 Warranty Information

This Xanlite PR10WR LED Floodlight is covered by a manufacturer's warranty. Please refer to the warranty card included with your purchase or contact Xanlite customer service for specific terms and conditions.

9.2 Customer Support

For technical assistance, troubleshooting, or warranty claims, please contact Xanlite customer support through their official website or the contact information provided with your product packaging.

